

Reference Manual

Squire 19.1.18

Last updated 2021-07-08

Table of Contents

Preface	1
Foreword.....	1
Licence.....	1
Warranty	1
Responsibilities	2
Contacting Vector Informatik GmbH Product Support.....	2
Getting the Latest Version of this Manual	2
1. Introduction	3
2. Coding Standards.....	4
ABAP	4
ABAP Metrics	4
ABAP Ruleset	9
ADA	15
ADA Metrics.....	15
ADA Ruleset.....	22
C.....	25
C Metrics	25
C Ruleset	33
COBOL	37
COBOL Metrics.....	37
COBOL Ruleset.....	43
C++	50
C++ Metrics.....	50
C++ Ruleset	59
C#	62
C# Metrics	62
C# Ruleset	72
Fortran	75
Fortran Metrics.....	75
Fortran Ruleset	80
Java.....	83
Java Metrics	83
Java Ruleset	90
Javascript	93
Javascript Metrics	93
Javascript Ruleset.....	98
MindC	101
MindC Metrics	101
MindC Ruleset.....	109
Objective-C.....	113
Objective-C Metrics	113
Objective-C Ruleset	122
PHP	125
PHP Metrics	125
PHP Ruleset	132
Python.....	135
Python Metrics	135
Python Ruleset	140
PL/SQL	143

PL/SQL Metrics	143
PL/SQL Ruleset	149
TSQL	151
TSQL Metrics	151
TSQL Ruleset	156
VB.net	158
VB.net Metrics	158
VB.net Ruleset	167
Xaml	170
Xaml Metrics	170
Xaml Ruleset	175
3. Repository Connectors	179
Folder Path	179
Description	179
Usage	179
Zip Upload	179
Description	179
Usage	179
Synergy	179
Description	180
Usage	180
ClearCase	181
Description	181
Usage	181
Git	182
Description	182
Usage	183
Perforce	184
Description	184
Usage	185
SVN	186
Description	186
Usage	186
Folder (use GNATHub)	187
Description	187
Usage	187
PTC Integrity	188
Description	188
Usage	188
CVS	188
Description	189
Usage	189
TFS	189
Description	189
Usage	190
Using Multiple Nodes	191
4. Data Providers	192
AntiC	192
Description	192
Usage	192
Automotive Coverage Import	192

Description.....	192
Usage	192
Automotive Tag Import.....	193
Description.....	193
Usage	193
BullseyeCoverage Code Coverage Analyzer.....	193
Description.....	193
Usage	193
CANoe.....	193
Description.....	193
Usage	194
CPD.....	194
Description.....	194
Usage	194
Cppcheck.....	194
Description.....	194
Usage	194
Cppcheck (plugin).....	195
Description.....	195
Usage	195
CPPTest.....	195
Description.....	195
Usage	196
Cantata.....	196
Description.....	196
Usage	196
CheckStyle.....	196
Description.....	196
Usage	196
CheckStyle (plugin).....	197
Description.....	197
Usage	197
CheckStyle for SQALE (plugin).....	197
Description.....	197
Usage	198
Cobertura format.....	198
Description	198
Usage	198
CodeSonar.....	198
Description	198
Usage	199
Compiler.....	199
Description.....	199
Usage	199
Coverity.....	199
Description.....	199
Usage	199
ESLint.....	200
Description.....	200
Usage.....	200
FindBugs.....	200

Description	200
Usage	200
FindBugs (plugin)	200
Description	201
Usage	201
Function Relaxer	201
Description	201
Usage	201
FxCop	202
Description	202
Usage	202
GCov	202
Description	202
Usage	202
GNATcheck	202
Description	203
Usage	203
GNATCompiler	203
Description	203
Usage	203
JSHint	203
Description	203
Usage	204
JUnit Format	204
Description	204
Usage	204
JaCoCo	204
Description	204
Usage	205
Klocwork	205
Description	205
Usage	205
Klocwork MISRA	205
Description	205
Usage	205
Rational Logiscope	206
Description	206
Usage	206
MSTest	206
Description	206
Usage	206
MSTest Code Coverage	206
Description	207
Usage	207
MemUsage	207
Description	207
Usage	207
NCover	207
Description	207
Usage	207
Oracle PLSQL compiler Warning checker	208

Description	208
Usage	208
MISRA Rule Checking using PC-lint	208
Description	208
Usage	209
PMD	209
Description	209
Usage	209
PMD (plugin)	209
Description	209
Usage	210
Polyspace	210
Description	210
Usage	210
MISRA Rule Checking with QAC	210
Description	211
Usage	211
Unit Test Status from Rational Test RealTime	211
Description	211
Usage	211
ReqIF	212
Description	212
Usage	212
SQL Code Guard	212
Description	212
Usage	213
Squan Sources	213
Description	213
Usage	213
Square Import	217
Description	217
Usage	217
Square Virtual Project	218
Description	218
Usage	218
StyleCop	218
Description	218
Usage	218
StyleCop (plugin)	218
Description	219
Usage	219
Tessy	219
Description	219
Usage	219
VectorCAST	219
Description	220
Usage	220
VectorCAST API	220
Description	220
Usage	220
Bauhaus	221

Description.....	221
Usage	221
CodeSniffer	221
Description.....	221
Usage	221
Configuration Checker.....	221
Description	222
Usage	222
Csv Coverage Import.....	222
Description	222
Usage	222
CSV Findings	222
Description	222
Usage	222
CSV Import	223
Description	223
Usage	223
Csv Tag Import	224
Description	224
Usage	224
Generic Findings Xml Import	224
Description	225
Usage	225
GNAThub	225
Description	225
Usage	225
CPU Data Import	226
Description	226
Usage	226
Excel Import.....	227
Description	227
Usage	227
Memory Data Import	230
Description	230
Usage	230
Requirement Data Import	231
Description.....	231
Usage	231
Stack Data Import.....	235
Description	235
Usage	235
Test Data Import	236
Description	236
Usage	236
Ticket Data Import	238
Description	238
Usage	239
Jira	241
Description.....	241
Usage	241
Mantis.....	243

Description	243
Usage	244
OSLC	244
Description	244
Usage	244
pep8	245
Description	245
Usage	245
pycodestyle / pep8 (plugin)	245
Description	245
Usage	245
PHP Code Coverage	245
Description	246
Usage	246
pylint	246
Description	246
Usage	246
pylint (plugin)	246
Description	246
Usage	247
QAC 8.2	247
Description	247
Usage	247
QAC 8.2 CERT Import	247
Description	247
Usage	247
SonarQube	248
Description	248
Usage	248
Testwell CTC++	248
Description	248
Usage	248
vTestStudio	249
Description	249
Usage	249
Adding More Languages to Squan Sources	249
Advanced COBOL Parsing	253
Using Data Provider Input Files From Version Control	253
Providing a catalog file to a Data Provider for Offline XSL Transformations	254
Creating a <i>form.xml</i> for your own Data Providers, Repository Connectors and Export	254
Definitions	
Defining Data Provider Parameters	255
Hiding your Data Provider elements in the web UI	257
Localising your Data Provider	258
Running your Data Provider	261
Executables	262
Arguments	263
Conditions	265
Calling Other Data Providers	265
Using the Square toolkit	267
Finding More Examples	268

Built-in Data Provider Frameworks	268
Creating Repository Connectors	269
Creating Export Definitions	270
5. Cloning Detection	273
Cloning Metrics	273
CCLC - Code Cloning Line Counting	273
CC - Code Cloned	273
CFTC - Control Flow Token (CFT) Cloned	273
CAC - Children Artefact Cloned	273
CN - Clones Number	274
RS - Repeated Substrings (Repeated Code Blocks)	274
CFTRS - Repeated Substrings in Control Flow Token	274
ICC - Inner Code Cloned	274
ICFTC - Inner Control Flow Token Cloned	274
Cloning Violations	275
CC (R_NOCC)	275
CFTC (R_NOCFTC)	275
CAC (R_NOCAC)	275
RS (R_NORS)	275
CFTRS (R_NOCFTRS)	275
6. Glossary	276
Acceptance Testing	276
Other Definitions	276
See also	276
Accessibility	276
Notes	276
See also	276
Accuracy	276
Other Definitions	276
See also	277
Accuracy of Measurement	277
Notes	277
See also	277
Acquirer	277
Other Definitions	277
Notes	277
See also	278
Action	278
See also	278
Activity	278
Other Definitions	278
Notes	279
See also	279
Actor	279
See also	279
Adaptability	279
Notes	279
See also	280
Agreement	280
See also	280
Analysability	280

See also	280
Analysis Model	280
See also	280
Architecture	280
Notes	281
See also	281
Attractiveness	281
Other Definitions	281
See also	281
Attribute	281
Other Definitions	281
Notes	281
See also	281
Availability	282
Other Definitions	282
Notes	282
See also	282
Base Measure	282
Notes	282
See also	282
Baseline	283
Other Definitions	283
Notes	283
See also	283
Branch	283
Other Definitions	284
Notes	284
See also	284
Branch Coverage	284
See also	284
Branch Testing	284
See also	285
Budget	285
Notes	285
See also	285
Build	285
See also	285
Call Graph	285
Notes	285
See also	286
Capability Maturity Model	286
Other Definitions	286
See also	286
Certification	286
Other Definitions	286
Example	286
See also	286
Certification Criteria	287
Notes	287
See also	287
Change Control Board	287

See also	287
Change Control System	287
Notes	287
See also	287
Change Management	288
See also	288
Changeability	288
Notes	288
See also	288
Co-existence	288
See also	288
Code	289
Other Definitions	289
See also	289
Code Coverage	289
See also	289
Code Freeze	289
See also	289
Code Review	290
See also	290
Code Verification	290
See also	290
Coding	290
Other Definitions	290
See also	290
Cohesion	290
Other Definitions	291
Notes	291
See also	291
Commercial-Off-The-Shelf (COTS)	291
Notes	291
See also	291
Commit	291
See also	292
Commitment	292
Other Definitions	292
Notes	292
See also	292
Compatibility	292
Other Definitions	292
See also	292
Complexity	293
Other Definitions	293
See also	293
Component	293
Other Definitions	293
Notes	293
See also	293
Conciseness	294
See also	294
Condition	294

Other Definitions	294
See also	294
Configuration	294
Other Definitions	294
See also	295
Configuration Control	295
See also	295
Configuration Item	295
Other Definitions	295
Notes	296
See also	296
Configuration Management	296
Other Definitions	296
See also	296
Configuration Management System	297
Notes	297
See also	297
Conflict	297
Notes	297
See also	297
Conformance	298
See also	298
Connectivity	298
See also	298
Consistency	298
Other Definitions	298
See also	298
Constraint	298
Other Definitions	299
Notes	299
See also	299
Content Coupling	299
See also	299
Context of Use	300
See also	300
Contract	300
Other Definitions	300
See also	300
Control Coupling	300
See also	300
Control Flow	301
See also	301
Control Flow Diagram	301
Notes	301
See also	301
Convention	301
See also	301
Correctability	301
See also	302
Correctness	302
Other Definitions	302

See also	302
Coupling	302
Other Definitions	302
Notes	302
See also	303
Coverage	303
Other Definitions	303
See also	303
Criteria	303
Other Definitions	303
See also	304
Criticality	304
See also	304
Custom Software	304
See also	304
Customer	304
Other Definitions	304
Notes	305
See also	305
Data	305
Other Definitions	305
See also	305
Data Coupling	306
Notes	306
See also	306
Data Flow	306
See also	306
Data Flow Diagram	306
Notes	306
See also	306
Data Management	307
Other Definitions	307
See also	307
Data Model	307
Notes	307
See also	307
Data Processing	308
Notes	308
See also	308
Data Provider	308
See also	308
Data Store	308
See also	308
Data Type	308
Notes	308
See also	309
Database	309
Other Definitions	309
See also	309
Decision Criteria	309
See also	309

Decoupling	310
See also	310
Defect	310
Other Definitions	310
Notes	310
See also	310
Degree of Confidence	310
See also	310
Deliverable	311
Other Definitions	311
See also	311
Delivery	311
See also	311
Dependability	311
Other Definitions	312
Notes	312
See also	312
Deployment	312
See also	312
Derived Measure	312
Notes	312
See also	312
Design	313
Other Definitions	313
See also	313
Design Pattern	313
Notes	313
See also	313
Developer	313
Notes	314
See also	314
Development	314
Other Definitions	314
See also	314
Development Testing	314
Other Definitions	314
See also	314
Direct Measure	315
See also	315
Direct Metric	315
See also	315
Document	316
Other Definitions	316
Notes	316
See also	316
Documentation	316
Other Definitions	316
Examples	317
Notes	317
See also	317
Dynamic Analysis	317

See also	317
Earned Value	318
See also	318
Effectiveness	318
Other Definitions	318
See also	318
Efficiency	318
Other Definitions	318
Notes	318
See also	318
Efficiency Compliance	319
See also	319
Effort	319
See also	319
Encapsulation	319
Other Definitions	319
See also	319
End User	320
Other Definitions	320
See also	320
Entity	320
Other Definitions	320
Examples	320
See also	320
Entry Point	321
See also	321
Environment	321
Other Definitions	321
See also	321
Error	321
Other Definitions	322
Notes	322
See also	322
Error Tolerance	322
See also	322
Evaluation	322
Other Definitions	322
Notes	323
See also	323
Evaluation Activity	323
See also	323
Evaluation Group	323
See also	323
Evaluation Method	324
See also	324
Evaluation Module	324
Notes	324
See also	324
Evaluation Technology	325
See also	325
Evaluation Tool	325

See also	325
Execute	325
Other Definitions	325
See also	325
Execution Efficiency	326
See also	326
Execution Time	326
Notes	326
See also	326
Exit	326
See also	326
Expandability	327
See also	327
Extendability	327
See also	327
External Attribute	327
Notes	327
See also	327
External Measure	327
Notes	328
See also	328
External Quality	328
Notes	328
See also	328
External Software Quality	329
Notes	329
See also	329
Facility	329
Notes	329
See also	329
Failure	329
Other Definitions	330
Notes	330
See also	330
Failure Rate	330
Notes	330
See also	330
Fault	331
Other Definitions	331
See also	331
Fault Tolerance	331
Other Definitions	331
Notes	332
See also	332
Feasibility	332
See also	332
Feature	332
Notes	332
See also	332
Feature Freeze	332
Notes	332

See also	333
Finite State Machine	333
See also	333
Flexibility	333
See also	333
Frozen Branch	333
See also	333
Function	334
Other Definitions	334
See also	334
Functional Analysis	334
Other Definitions	334
See also	334
Functional Requirement	335
Other Definitions	335
See also	335
Functional Size	335
See also	335
Functional Testing	335
Other Definitions	335
See also	335
Functional Unit	336
See also	336
Functionality	336
Other Definitions	336
Notes	336
See also	336
Functionality Compliance	336
See also	336
Generality	337
See also	337
Generic Practice	337
See also	337
Glossary	337
See also	337
Goal	337
Other Definitions	337
See also	338
Granularity	338
See also	338
Historical Information	338
See also	338
Hybrid Coupling	338
See also	338
Impact Analysis	338
Notes	339
See also	339
Implementation	339
Other Definitions	339
See also	339
Implied Needs	339

Other Definitions	339
Notes	339
See also	339
Incremental Development	340
See also	340
Indicator	340
Other Definitions	340
Notes	340
See also	340
Indicator Value	340
See also	341
Indirect Measure	341
Notes	341
See also	341
Indirect Metric	341
See also	341
Information	342
Notes	342
See also	342
Information Analysis	342
See also	342
Information Management	342
See also	342
Information Need	343
See also	343
Information Product	343
Example	343
See also	343
Inspection	343
Other Definitions	343
Notes	343
See also	343
Installability	344
Notes	344
See also	344
Installation Manual	344
See also	344
Integration	344
See also	344
Integration Test	345
See also	345
Integrity	345
See also	345
Interface Testing	345
See also	345
Intermediate Software Product	345
Notes	346
See also	346
Internal Attribute	346
Notes	346
See also	346

Internal Measure	346
Notes	346
See also	346
Internal Quality	347
Notes	347
See also	347
Internal Software Quality	347
Examples	347
Notes	348
See also	348
Interoperability	348
Notes	348
See also	348
Interoperability Testing	348
See also	348
Interval Scale	349
Notes	349
See also	349
Item	349
See also	349
Iteration	349
See also	349
Key Practices	349
Notes	350
See also	350
Key Process Area	350
Notes	350
See also	350
Knowledge Base	350
See also	351
Learnability	351
Notes	351
See also	351
Lessons Learned	351
See also	351
Level of Performance	351
See also	351
Life Cycle	352
Other Definitions	352
See also	352
Life Cycle Model	352
See also	352
Maintainability	352
Other Definitions	353
Notes	353
See also	353
Maintainability Compliance	353
See also	353
Maintainer	353
Other Definitions	354
See also	354

Maintenance	354
Other Definitions	354
Notes	354
See also	354
Maintenance Manual	355
Notes	355
See also	355
Maturity	355
See also	355
Measurable Concept	355
See also	355
Measurand	356
Notes	356
See also	356
Measure	356
Other Definition	356
Notes	356
See also	356
Measurement	357
Other Definitions	357
Notes	357
See also	357
Measurement Analyst	358
See also	358
Measurement Experience Base	358
See also	358
Measurement Function	358
Notes	358
See also	358
Measurement Method	359
Notes	359
See also	359
Measurement Procedure	359
See also	359
Measurement Process	359
See also	360
Measurement Process Owner	360
See also	360
Measurement Sponsor	360
See also	360
Measurement User	360
See also	360
Metric	360
Notes	361
See also	361
Milestone	361
Other Definitions	361
Notes	361
See also	361
Mock Object	362
See also	362

Model	362
Other Definitions	362
See also	362
Modifiability	362
See also	362
Modifiable	363
See also	363
Modularity	363
Other Definitions	363
See also	363
Module	363
Other Definitions	363
Notes	364
See also	364
Moke Object	364
See also	364
Multidimensional Analysis	364
See also	364
Network	364
See also	364
Nonfunctional Requirement	365
Notes	365
See also	365
Nontechnical Requirement	365
Notes	365
See also	365
Object	365
Other Definitions	365
See also	366
Object Model	366
Notes	366
See also	366
Object Oriented Design	366
See also	366
Observation	366
See also	367
Observation Period	367
See also	367
Operability	367
Notes	367
See also	367
Operand	368
Notes	368
See also	368
Operational Testing	368
See also	368
Operator	368
Other Definitions	368
Notes	369
See also	369
Operator Manual	369

Notes	369
See also	369
Optional Attribute	369
Notes	370
See also	370
Optional Requirement	370
Notes	370
See also	370
Organisational Unit	370
Notes	370
See also	370
Path	371
Other Definitions	371
See also	371
Path Analysis	371
See also	371
Path Testing	371
See also	371
Pathological Coupling	372
See also	372
Peer Review	372
Other Definitions	372
See also	372
Performance	372
See also	372
Performance Indicator	373
See also	373
Performance Testing	373
See also	373
Pilot Project	373
See also	373
Portability	374
Other Definitions	374
Notes	374
See also	374
Portability Compliance	374
See also	374
Practice	374
Other Definitions	374
See also	375
Precision	375
Notes	375
See also	375
Predictive Metric	375
See also	375
Procedure	375
Other Definitions	376
See also	376
Process	376
Other Definitions	376
Notes	376

See also	376
Process Assessment.....	377
See also	377
Process Assessment Model	377
See also	377
Process Capability	377
See also	377
Process Capability Determination	378
See also	378
Process Capability Level.....	378
See also	378
Process Context	378
See also	378
Process Improvement	379
See also	379
Process Improvement Objective	379
See also	379
Process Improvement Program	379
Notes	379
See also	379
Process Improvement Project.....	380
See also	380
Process Metric	380
See also	380
Process Outcome.....	380
Other Definitions.....	380
Notes	380
See also	380
Process Performance.....	381
See also	381
Process Purpose	381
Notes.....	381
See also	381
Product	381
Other Definitions.....	382
Notes	382
See also	382
Product Line	382
See also	382
Product Metric	383
See also	383
Productivity	383
Notes	383
See also	383
Programmer Manual.....	383
See also	383
Project	384
Other Definitions.....	384
Notes	384
See also	384
Project Management.....	384

Other Definitions	384
See also	384
Project Phase	385
Notes	385
See also	385
Prototype	385
Other Definitions	385
Notes	385
See also	385
Qualification	385
Other Definitions	386
See also	386
Qualification Testing	386
Other Definitions	386
See also	386
Quality	386
Other Definitions	386
Notes	387
See also	387
Quality Assurance	387
Other Definitions	387
Notes	387
See also	387
Quality Control	388
Notes	388
See also	388
Quality Evaluation	388
Notes	388
See also	388
Quality Factor	389
See also	389
Quality Management	389
See also	389
Quality Measure Element	389
Notes	389
See also	389
Quality Metric	390
Other Definitions	390
See also	390
Quality Model	390
Other Definitions	390
See also	390
Quality in Use	390
Notes	391
See also	391
Rating	391
Notes	391
See also	391
Rating Level	392
Notes	392
See also	392

Readability	392
See also	392
Recoverability	392
Notes	393
See also	393
Recovery	393
See also	393
Reengineering	393
See also	393
Regression Testing	393
Other Definitions	393
See also	394
Release	394
Other Definitions	394
Notes	394
See also	394
Reliability	394
Other Definitions	394
Notes	395
See also	395
Reliability Compliance	395
See also	395
Repeatability of Results of Measurements	395
Notes	395
See also	395
Replaceability	396
Notes	396
See also	396
Reproducibility of Results of Measurements	396
Notes	396
See also	396
Request For Change	397
See also	397
Request For Information	397
See also	397
Request For Proposal	397
Other Definitions	397
See also	397
Requirement	398
Other Definitions	398
Notes	398
See also	398
Requirements Analysis	398
Other Definitions	398
See also	399
Requirements Derivation	399
See also	399
Requirements Document	399
Example	399
See also	399
Requirements Engineering	400

Notes	400
See also	400
Requirements Partitioning	400
Notes	400
See also	400
Requirements Review	400
Notes	400
See also	400
Requirements Specification	401
Notes	401
See also	401
Requirements Traceability	401
Other Definitions	401
See also	401
Requirements Traceability Matrix	401
See also	402
Resource	402
Other Definitions	402
Example	402
Notes	402
See also	402
Resource Utilisation	402
Notes	402
See also	403
Result	403
Notes	403
See also	403
Retirement	403
Other Definitions	403
See also	403
Reverse Engineering	403
Notes	404
See also	404
Risk	404
Other Definitions	404
Notes	404
See also	404
Risk Acceptance	404
Other Definitions	405
Notes	405
See also	405
Risk Analysis	405
See also	405
Robustness	405
See also	405
Role	405
Other Definitions	406
Notes	406
See also	406
Routine	406
Other Definitions	406

Notes	406
See also	406
Run	406
See also	407
Safety	407
Other Definitions	407
Notes	407
See also	407
Satisfaction	407
Notes	407
See also	407
Scale	407
Other Definitions	408
Notes	408
Example	408
See also	408
Security	408
Other Definitions	408
Notes	409
See also	409
Service	409
Other Definitions	409
See also	409
Service Level Agreement	409
See also	409
Simplicity	410
Other Definitions	410
See also	410
Software	410
Other Definitions	410
Example	410
Notes	410
See also	410
Software Asset Management	411
See also	411
Software Development Process	411
Notes	411
See also	411
Software Engineering	411
Other Definitions	411
See also	411
Software Item	412
Other Definitions	412
See also	412
Software Life Cycle	412
Other Definitions	412
See also	412
Software Product Evaluation	413
Notes	413
See also	413
Software Quality	413

Notes	413
See also	413
Software Quality Characteristic	413
Notes	413
See also	413
Software Quality Evaluation	414
See also	414
Software Quality Measure	414
Notes	414
See also	414
Software Repository	414
See also	415
Software Unit	415
Other Definitions	415
See also	415
Source Code	415
See also	415
Specification	415
Other Definitions	415
See also	416
Stability	416
See also	416
Stage	416
Notes	416
See also	416
Stakeholder	416
Other Definitions	416
Examples	417
Notes	417
See also	417
Standard	417
Other Definitions	417
See also	417
Standard Process	417
Notes	417
See also	418
Statement	418
See also	418
Statement Testing	418
See also	418
Statement of Work	418
Other Definitions	418
See also	419
Static Analysis	419
See also	419
Statistical Process Control	419
Notes	419
The c-chart	419
See also	420
Step	420
Other Definitions	420

Notes	420
See also	420
Stress Testing	420
See also	421
Structural Testing	421
Notes	421
See also	421
Stub	421
Other Definitions	421
See also	421
Suitability	422
Notes	422
See also	422
Supplier	422
Notes	422
See also	422
Support	423
Other Definitions	423
Examples	423
Notes	423
See also	423
Support Manual	423
Notes	423
See also	423
System	424
Other Definitions	424
See also	424
System Testing	424
See also	424
Task	424
Other Definitions	424
Notes	425
See also	425
Technical Requirement	425
Examples	425
See also	425
Technique	425
Other Definitions	426
See also	426
Test	426
Other Definitions	426
See also	426
Test Case	426
Other Definitions	426
See also	427
Test Case Suite	427
See also	427
Test Coverage	427
Other Definitions	427
See also	427
Test Documentation	428

Other Definitions	428
See also	428
Test Environment	428
See also	428
Test Objective	428
See also	429
Test Plan	429
Other Definitions	429
Notes	429
See also	429
Test Procedure	429
Other Definitions	429
See also	429
Testability	430
Other Definitions	430
See also	430
Testing	430
Other Definitions	430
See also	431
Testing Description	431
See also	431
Time Behaviour	431
See also	432
Tool	432
Other Definitions	432
Notes	432
See also	432
Total Quality Management	432
See also	432
Traceability	432
Other Definitions	432
Notes	433
See also	433
Traceable	433
See also	433
Trunk	433
See also	433
Understandability	433
Other Definitions	434
Notes	434
See also	434
Unit Test	434
Other Definitions	434
See also	434
Unit of Measurement	434
Notes	434
See also	435
Usability	435
Other Definitions	435
Notes	435
See also	435

Usability Compliance	435
See also	436
User	436
Other Definitions	436
Notes	436
See also	436
User Documentation	437
Other Definitions	437
See also	437
User Manual	437
Other Definitions	437
Notes	437
See also	437
Validation	438
Other Definitions	438
Notes	438
See also	438
Value	439
Other Definitions	439
See also	439
Verification	439
Other Definitions	439
Notes	440
See also	440
Version	440
Other Definitions	440
Notes	440
See also	441
Work Breakdown Structure	441
See also	441
Work Product	441
Other Definitions	441
See also	441
7. Standards	442
CMMi	442
Structure	442
See also	442
DOD-STD-2167A	442
See also	443
IEC 61508	443
Contents	443
See also	443
IEC 61508-3	443
See also	443
IEC 61508-7	443
See also	444
IEEE 1012	444
Access	444
IEEE 1058	444
Access	444
IEEE 1061	444

Access	444
IEEE 1074	445
Access	445
IEEE 1220	445
Access	445
IEEE 1233	445
Access	445
IEEE 1320	445
Access	445
IEEE 1362	446
Access	446
IEEE 1490	446
Access	446
IEEE 610.12	446
Access	446
IEEE 829	446
Access	447
IEEE 830	447
Access	447
IEEE 982	447
Access	447
ISO 5806	447
Access	447
ISO 8402	447
ISO 9001	448
Access	448
ISO 9127	448
Access	448
ISO 9241	448
Contents / Access	448
See also	449
ISO 9241-10	449
Access	450
See also	450
ISO 9241-11	450
Contents	450
Access	450
See also	451
ISO/IEC 12119	451
ISO/IEC 12207	451
Access	451
ISO/IEC 14143	451
Contents	451
See also	451
ISO/IEC 14143-1	452
Access	452
See also	452
ISO/IEC 14143-3	452
Access	452
See also	452
ISO/IEC 14598	452

Contents / Access	453
See also	453
ISO/IEC 14598-1	453
Access	453
See also	453
ISO/IEC 14598-2	453
Access	454
See also	454
ISO/IEC 14598-3	454
Access	454
See also	454
ISO/IEC 14598-4	455
Access	455
See also	455
ISO/IEC 14598-5	455
Access	455
See also	455
ISO/IEC 14598-6	456
Access	456
See also	456
ISO/IEC 14756	456
Access	456
ISO/IEC 14764	456
Access	457
ISO/IEC 15026	457
Access	457
See also	457
ISO/IEC 15026-1	457
See also	457
ISO/IEC 15026-2	457
See also	457
ISO/IEC 15288	458
Access	458
See also	458
ISO/IEC 15289	458
Access	458
See also	458
ISO/IEC 15414	459
Access	459
ISO/IEC 15474	459
Contents	459
See also	459
ISO/IEC 15474-1	459
Access	459
See also	459
ISO/IEC 15474-2	460
Access	460
See also	460
ISO/IEC 15504	460
Contents	460
See also	460

ISO/IEC 15504-1	461
Access	461
See also	461
ISO/IEC 15504-2	461
Access	462
See also	462
ISO/IEC 15504-3	462
Access	462
See also	462
ISO/IEC 15504-4	462
Access	463
See also	463
ISO/IEC 15504-5	463
Access	463
See also	463
ISO/IEC 15504-6	464
Access	464
See also	464
ISO/IEC 15504-7	464
Access	464
See also	464
ISO/IEC 15846	465
Access	465
See also	465
ISO/IEC 15910	465
Notes	465
ISO/IEC 15939	466
Access	466
See also	466
ISO/IEC 19759	466
Access	466
See also	466
ISO/IEC 19770	466
Contents	467
See also	467
ISO/IEC 19770-1	467
Access	467
See also	467
ISO/IEC 19770-2	467
Access	467
See also	468
ISO/IEC 20000	468
Contents/Access	468
ISO/IEC 2382	468
Contents	468
See also	469
ISO/IEC 2382-1	469
Access	469
See also	469
ISO/IEC 25000	469
Access	470

See also	470
ISO/IEC 25001	470
Access	470
See also	470
ISO/IEC 25010	470
Access	470
See also	470
ISO/IEC 25012	471
Access	471
See also	471
ISO/IEC 25020	471
Access	471
See also	471
ISO/IEC 25021	471
Access	472
See also	472
ISO/IEC 25030	472
Access	472
See also	472
ISO/IEC 25040	472
Access	472
See also	472
ISO/IEC 25045	473
Access	473
See also	473
ISO/IEC 25051	473
Access	473
See also	473
ISO/IEC 25060	473
Access	474
See also	474
ISO/IEC 25062	474
Access	474
See also	474
ISO/IEC 26514	474
Access	474
ISO/IEC 29881	474
Access	475
ISO/IEC 90003	475
Access	475
ISO/IEC 9126	475
Contents	475
Structure	475
See also	476
ISO/IEC 9126-1	476
Access	477
See also	477
ISO/IEC 9126-2	477
Access	477
See also	477
ISO/IEC 9126-3	477

Access	478
See also	478
ISO/IEC 9126-4	478
Access	478
See also	478
ISO/IEC 9294	478
Access	479
See also	479
ISO/IEC 99	479
See also	479
ISO/IEC SQuaRE	479
Structure	480
See also	480
ISO/IEC/IEEE 15289	480
Access	481
See also	481
ISO/IEC/IEEE 24765	481
Access	481
RTCA/EUROCAE	481
SIGIST	481
Team Software Process	482
See also	482
Appendix A: Data Provider Frameworks	483
Current Frameworks	483
csv_import Reference	483
xml Reference	486
Legacy Frameworks	487
Csv Reference	489
csv_findings Reference	493
CsvPerl Reference	494
Generic Reference	496
GenericPerl Reference	502
FindingsPerl Reference	505
ExcelMetrics Reference	509
Appendix B: Square XML Schemas	517
input-data-2.xsd	517
form.xsd	517
properties-1.2.xsd	517
config-1.3.xsd	517
analysis.xsd	517
decision.xsd	517
description.xsd	517
exports.xsd	517
highlights.xsd	517
properties.xsd	517
tutorials.xsd	517
wizards.xsd	517
Appendix C: Licences	518
Software Licence Agreement	518
Redistributed Software	524
Index	526

Preface

© 2021 Vector Informatik GmbH - All rights reserved - <https://www.vector.com/> - This material may not be reproduced, displayed, modified or distributed without the express prior written permission of the copyright holder. Squire is protected by an Interdeposit Certification registered with Agence pour la Protection des Programmes under the Inter Deposit Digital Number IDDN.FR.001.390035.001.S.P.2013.000.10600.

Foreword

This edition of the Reference Manual was released by Vector Informatik GmbH.

It is part of the user documentation of the Squire software product edited and distributed by Vector Informatik GmbH.

For information on how to use and configure Squire, the full suite of manuals includes:

User Manual	Target Audience
Squire Installation Checklist	New users before their first installation
Squire Installation and Administration Guide	IT personnel and Squire administrators
Squire Getting Started Guide	End users, new users wanting to discover Squire features
Squire Command Line Interface	Continuous Integration Managers
Squire Configuration Guide	Squire configuration maintainers, Quality Assurance personnel
Squire Eclipse Plugin Guide	Eclipse IDE users
Squire Reference Manual	End Users, Squire configuration maintainers
Squire API Guide	End Users, Continuous Integration Managers
Squire Software Analytics Handbook	End Users, Quality Assurance personnel



You can also use the online help from any page when using the Squire web interface by clicking **? > Help**.

Licence

No part of this publication may be reproduced, transmitted, stored in a retrieval system, nor translated into any human or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of the copyright owner, Vector Informatik GmbH. Vector Informatik GmbH reserves the right to revise this publication and to make changes from time to time without obligation to notify authorised users of such changes. Consult Vector Informatik GmbH to determine whether any such changes have been made. The terms and conditions governing the licensing of Vector Informatik GmbH software consist solely of those set forth in the written contracts between Vector Informatik GmbH and its customers. All third-party products are trademarks or registered trademarks of their respective companies.

Warranty

Vector Informatik GmbH makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Vector Informatik GmbH shall not be liable for errors contained herein nor for incidental or consequential damages in connection with the furnishing, performance or use of this material.

This edition of the Reference Manual applies to Squire 19.1.18 and to all subsequent releases and modifications until otherwise indicated in new editions.

Responsibilities

Approval of this version of the document and any further updates are the responsibility of Vector Informatik GmbH.

Contacting Vector Informatik GmbH Product Support

If the information provided in this manual is erroneous or inaccurate, or if you encounter problems during your installation, contact Vector Informatik GmbH Product Support: <https://support.squoring.com/>

You will need a valid customer account to submit a support request. You can create an account on the support website if you do not have one already.

For any communication:

- **support@squoring.com**
- **Vector Informatik GmbH Product Support**

Squoring Technologies - 9/11 rue Matabiau / 31000 Toulouse - FRANCE

Getting the Latest Version of this Manual

The version of this manual included in your Squire installation may have been updated. If you would like to check for updated user guides, consult the Vector Informatik GmbH documentation site to consult or download the latest Squire manuals at <https://support.squoring.com/documentation/latest>. Manuals are constantly updated and published as soon as they are available.

Chapter 1. Introduction

The Reference Manual provides a complete reference for the metrics, glossary and standards used in Squire 19.1.18.

This manual is intended for Squire administrators and end-users. It gives useful information about the technical background of Squire and important knowledge basis to understand what is measured and how.

Chapter 2. Coding Standards

This chapter describes the list of metrics and rules for each language supported by Squore. Note that this is not the complete list of metrics and rules in Squore, only the ones generated by our source code parser. Some of the rules may also be disabled by default in your configuration. For more information about your analysis model, consult Squore's Model Viewer and Analysis Model Editor, which provide more information about each metric and rule.

ABAP

ABAP Metrics

Andthen Operators

- **Mnemonic** ANTH
- **Description** Number of 'andthen' operators

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC
- **Description** Number of lines of code containing only a brace in the source file(s).

Case Blocks

- **Mnemonic** CABL
- **Description** Number of 'case' blocks in 'switch' in the function

Case Labels

- **Mnemonic** CASE
- **Description** Number of 'case' labels in the function

Catch Statements

- **Mnemonic** CATC
- **Description** Number of 'catch' statements in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Number of Check instruction

- **Mnemonic** CHECK
- **Description** Number of Check instruction

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Public Constant

- **Mnemonic** CPBL
- **Description** Public Constant

Protected Constant

- **Mnemonic** CPRT
- **Description** Protected Constant

Private Constant

- **Mnemonic** CPRV
- **Description** Private Constant

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Default Statement

- **Mnemonic** DEFT
- **Description** Number of 'default' blocks in 'switch' in the function

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Public Data

- **Mnemonic** DPBL
- **Description** Public Data

Protected Data

- **Mnemonic** DPRT
- **Description** Protected Data

Private Data

- **Mnemonic** DPRV
- **Description** Private Data

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

Call to exit

- **Mnemonic** EXIT

- **Description** Number of calls to the exit function

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

File Type Count

- **Mnemonic** FTYP
- **Description** File Type Count

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening brace.

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Mixed Lines

- **Mnemonic** MLOC
- **Description** Number of lines containing both code and comment in the source files.

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

Or else operators

- **Mnemonic** OREL
- **Description** Number of 'or else' operators

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

Switch Statements

- **Mnemonic** SWIT
- **Description** Number of 'switch' statements in the function

Throw Statements

- **Mnemonic** THRO
- **Description** Number of 'throw' statements in the function

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Try Statements

- **Mnemonic** TRY
- **Description** Number of 'try' statements in the function

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

ABAP Ruleset

Avoid using APPEND statements in loops

- **Mnemonic** AVOIDAPPENDINLOOP
- **Description** Avoid using COMMIT WORK statements in loops.

Avoid using APPEND in SQL SELECT statements

- **Mnemonic** AVOIDAPPENDINSELECT
- **Description** Avoid using APPEND in SQL SELECT statements.

Avoid using BREAK-POINT

- **Mnemonic** AVOIDBREAKPOINT
- **Description** Avoid using BREAK-POINT

Avoid using CHECK in SQL SELECT statements

- **Mnemonic** AVOIDCHECKINSELECT
- **Description** Avoid using CHECK in SQL SELECT statements

Avoid using COMMIT WORK statements in loops

- **Mnemonic** AVOIDCOMMITWORKINLOOP
- **Description** Avoid using COMMIT WORK statements in loops.

Avoid obsolete DATA BEGIN OF OCCURS statement

- **Mnemonic** AVOIDDATAOCCURS
- **Description** Avoid obsolete DATA BEGIN OF OCCURS statement

Avoid using INSERT statements in loops

- **Mnemonic** AVOIDINSERTINLOOP
- **Description** Avoid using INSERT statements in loops. Querying in a loop can lead to performance issues.

Avoid using INSERT in SQL SELECT statements

- **Mnemonic** AVOIDINSERTINSELECT
- **Description** Avoid using INSERT in SQL SELECT statements

Avoid using SQL INTO statements in loops

- **Mnemonic** AVOIDINTOINLOOP
- **Description** Avoid using SQL INTO statements in loops.

Avoid using SELECT *

- **Mnemonic** AVOIDSELECTALL
- **Description** SELECT * should be avoided as it does not enable to keep control on the flow return and could therefore be error prone and potentially lead to performance issues.

Avoid using the SQL "BYPASSING BUFFER" clause

- **Mnemonic** AVOIDSELECTBYPASS
- **Description** The BYPASSING BUFFER clause causes the SELECT statement to avoid the SAP buffering and to read directly from the database and not from the buffer on the application server.

Avoid using SELECT DISTINCT Statement

- **Mnemonic** AVOIDSELECTDISTINCT

- **Description** The SQL DISTINCT clause causes the SELECT statement to avoid the SAP buffering and to read directly from the database and not from the buffer on the application server.

Avoid SELECT SQL statement without a WHERE clause

- **Mnemonic** AVOIDSELECTNOWHERE
- **Description** Avoid SELECT SQL statement without a WHERE clause

Avoid SELECT SQL statement with a WHERE clause containing the NOT EQUAL operator

- **Mnemonic** AVOIDSELECTWHERENOTEQ
- **Description** Avoid SELECT SQL statement with a WHERE clause containing the NOT EQUAL operator.

Avoid using SQL Aggregate Functions

- **Mnemonic** AVOIDSQLAGGREGATEFUNC
- **Description** SQL COUNT(..) , MIN(..), MAX(..), SUM(..), AVG(..) functions cause the SAP table buffer to be bypassed and so usage of such functions can lead to some performance issues.

Avoid using SUBMIT statements in loops

- **Mnemonic** AVOIDSUBMITINLOOP
- **Description** Avoid using SUBMIT statements in loops.

Avoid using UPDATE, MODIFY, DELETE statements in loops

- **Mnemonic** AVOIDUPDELINLOOP
- **Description** Avoid using UPDATE, MODIFY, DELETE statements in loops. Querying in a loop can lead to performance issues.

Avoid UPDATE or DELETE SQL Statement without a WHERE clause

- **Mnemonic** AVOIDUPDELNOWHERE
- **Description** Avoid UPDATE or DELETE SQL Statement without a WHERE clause

Avoid using GROUP BY in queries

- **Mnemonic** AVOIDUSINGSQLGROUPBY
- **Description** Using GROUP BY in SQL queries can lead to performance issues.

Avoid using the JOIN SQL clause

- **Mnemonic** AVOIDUSINGSQLJOIN
- **Description** Using the SQL JOIN clause leads to bypass the SAP table buffer.

Avoid using LIKE in SQL queries

- **Mnemonic** AVOIDUSINGSQLLIKE
- **Description** Using LIKE in SQL queries can lead to performance issues.

Avoid using the WAIT statement

- **Mnemonic** AVOIDWAIT
- **Description** Avoid using the WAIT statement.

The class name should conform to the defined standard

- **Mnemonic** CLASSNAMINGCONVENTION
- **Description** The class name should conform to the defined standard

Commented-out Source Code is not allowed

- **Mnemonic** R_CSTAT
- **Description** Commented-out Source Code is not allowed

Missing Default

- **Mnemonic** DEFAULT
- **Description** The final clause of a switch statement shall be the default clause (see [MISRA-C:2004]: RULE 15.3).

Missing final else

- **Mnemonic** ELSEFINAL
- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-C:2004]: RULE 14.10).

Forbid call to a system function

- **Mnemonic** FORBIDCALLCFUNC
- **Description** Call of a System Function: CALL 'cfunc' is only intended for internal usage. Incompatible changes and further development is possible at any time and without warning or notice.

Forbid calls to dialog transactions

- **Mnemonic** FORBIDCALLDIALTRANS
- **Description** Forbid calls to dialog transactions.

Forbid use of GENERATE REPORT / SUBROUTINE POOL / DYNPRO

- **Mnemonic** FORBIDGENERATEPROG
- **Description** This statement is exclusively for internal use within SAP Technology Development. Incompatible changes or developments are possible at any time without prior warning or notes.

Forbid calls to GET RUN TIME.

- **Mnemonic** FORBIDGETRUNTIME
- **Description** Forbid calls to GET RUN TIME.

Forbid use of INSERT/DELETE REPORT/TEXTPOOL

- **Mnemonic** FORBIDINSERTPROG
- **Description** This statement is exclusively for internal use within SAP Technology Development. Incompatible changes or developments are possible at any time without prior warning or notice.

Forbid uses of OFFSET in ASSIGN

- **Mnemonic** FORBIDOFFSETINASSIGN
- **Description** Forbid uses of OFFSET in ASSIGN.

Forbid use of SYSTEM-CALL

- **Mnemonic** FORBIDSYSTEMCALL
- **Description** This statement is only for !Internal use in SAP Basis development!. Its use is subject to various restrictions, not all of which may be listed in the documentation. Changes and further development, which may be incompatible, may occur at any time, without warning or notice!

The form name should conform to the defined standard

- **Mnemonic** FORMNAMINGCONVENTION
- **Description** The form name should conform to the defined standard

The function name should conform to the defined standard

- **Mnemonic** FUNCTIONNAMINGCONVENTION
- **Description** The function name should conform to the defined standard

Avoid calling a function module without handling exceptions

- **Mnemonic** HANDLEERRORCALLFUNC
- **Description** Handling the exceptions when calling a function module is optional but should be mandatory to correctly handle errors in production.

The macro name should conform to the defined standard

- **Mnemonic** MACRONAMINGCONVENTION
- **Description** The macro name should conform to the defined standard

The method name should conform to the defined standard

- **Mnemonic** METHODNAMINGCONVENTION
- **Description** The method name should conform to the defined standard

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

Continue shall not be used

- **Mnemonic** NOCONT
- **Description** The 'continue' statement shall not be used (see [MISRA-C:2004]: RULE 14.5).

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Do not use "Native SQL" instructions

- **Mnemonic** NONATIVESQL
- **Description** Native SQL should not be used.

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

Missing case in switch

- **Mnemonic** ONECASE
- **Description** Every switch statement shall have at least one case clause (see [MISRA-C:2004]: RULE 15.5).

Prevent use of EDITOR-CALLS

- **Mnemonic** PREVENTEDITORCALL
- **Description** This statement bypasses the authority checks that are performed when calling the ABAP editor via transaction code.

The program or report name should conform to the defined standard

- **Mnemonic** PROGREPORTNAMINGCONVENTION

- **Description** The program or report name should conform to the defined standard

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

ADA

ADA Metrics

Andthen Operators

- **Mnemonic** ANTH
- **Description** Number of 'andthen' operators

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC
- **Description** Number of lines of code containing only a brace in the source file(s).

Case Blocks

- **Mnemonic** CABL
- **Description** Number of 'case' blocks in 'switch' in the function

Case Labels

- **Mnemonic** CASE
- **Description** Number of 'case' labels in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Declare operators

- **Mnemonic** DECBL
- **Description** Number of Declare operators

Default Statement

- **Mnemonic** DEFT
- **Description** Number of 'default' blocks in 'switch' in the function

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

Entry Statements

- **Mnemonic** ENTRY
- **Description** Number of Entry statements

Exception When blocks

- **Mnemonic** EXBL
- **Description** Number of 'when' blocks in 'exception handler'.

Exception handlers

- **Mnemonic** EXGR
- **Description** Number of Exception handlers

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Goto Statements

- **Mnemonic** GOTO
- **Description** Number of 'goto' statements

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening brace.

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Generic object

- **Mnemonic** ISGEN
- **Description** The object is declared generic

Label Statements

- **Mnemonic** LABEL
- **Description** Number of Label statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Mixed Lines

- **Mnemonic** MLOC
- **Description** Number of lines containing both code and comment in the source files.

AND operators

- **Mnemonic** NBAND
- **Description** Number of AND operators

Constants

- **Mnemonic** NBCONST
- **Description** Number of Constants

Private constant

- **Mnemonic** NBCONSTPRIV
- **Description** Number of Private constants

Public constants

- **Mnemonic** NBCONSTPUB
- **Description** Number of Public constants

Declared functions

- **Mnemonic** NBDFUNC
- **Description** Number of Declared functions/procedures

Private functions/Procedures

- **Mnemonic** NBDFUNCPRIV
- **Description** Number of Private function/Procedure

Public functions

- **Mnemonic** NBDFUNCPUB
- **Description** Number of Public functions/procedures

Exceptions

- **Mnemonic** NBEXCEPT
- **Description** Number of Declared Exceptions

Private exceptions

- **Mnemonic** NBEXCEPTPRIV
- **Description** Number of Private exceptions

Public exceptions

- **Mnemonic** NBEXCEPTPUB
- **Description** Number of Public exceptions

Separate functions/procedures

- **Mnemonic** NBFUNCDSEP
- **Description** Number of Separate functions/procedures

OR operators

- **Mnemonic** NBOR
- **Description** Number of OR operators

Separate packages

- **Mnemonic** NBPACKDSEP
- **Description** Number of package declared Separate

Protected objects

- **Mnemonic** NBPROTOBJDSEP
- **Description** Number of Declred Protected objects

Renamed objects

- **Mnemonic** NBRENA
- **Description** Number of Renamed object

Subtypes

- **Mnemonic** NBSTYP
- **Description** Number of Subtypes

Separate tasks

- **Mnemonic** NBTASKDSEP
- **Description** Number of task declared Separate

Types

- **Mnemonic** NBTYP
- **Description** Number of Types

Derived types

- **Mnemonic** NBTYPDRV
- **Description** Number of Derived types

Private types

- **Mnemonic** NBTYPPRIV
- **Description** Number of Private types

Public types

- **Mnemonic** NBTYPPUB
- **Description** Number of Public types

Variables

- **Mnemonic** NBVAR
- **Description** Number of Variables

Private variables

- **Mnemonic** NBVARPRIV
- **Description** Number of Private variables

Public variables

- **Mnemonic** NBVARPUB
- **Description** Number of Public variables

With statements

- **Mnemonic** NBWITH
- **Description** Number of With statements

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

Orelse operators

- **Mnemonic** OREL
- **Description** Number of 'orelse' operators

Raise statements

- **Mnemonic** RAISE
- **Description** Number of Raise statements

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

Switch Statements

- **Mnemonic** SWIT

- **Description** Number of 'switch' statements in the function

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

ADA Ruleset

Backward Goto shall not be used

- **Mnemonic** BWGOTO
- **Description** Backward gotos shall not be used.

Commented-out Source Code is not allowed

- **Mnemonic** R_CSTAT
- **Description** Commented-out Source Code is not allowed

Missing final else

- **Mnemonic** ELSEFINAL
- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-C:2004]: RULE 14.10).

Exit Label shall be named

- **Mnemonic** EXTLABEL
- **Description** Each exit label shall be named.

Use 'exit when' instead of if... exit syntax

- **Mnemonic** EXTWHEN
- **Description** Use 'exit when' instead of if... exit syntax.

Each loop shall be named

- **Mnemonic** LOOPNAMED
- **Description** Each loop shall be named.

Abort shall not be used

- **Mnemonic** NOABORT
- **Description** Use of 'abort'

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

Delay shall not be used

- **Mnemonic** NODELAY
- **Description** Use of 'delay'

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Goto shall not be used

- **Mnemonic** NOGOTO
- **Description** The 'goto' statement shall not be used (see [MISRA-C:2004]: RULE 14.4).

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

There shall be no 'when others' in exception handler

- **Mnemonic** NOWHEN_OTHERS
- **Description** There shall be no 'when others' in exception handler.

Missing case in switch

- **Mnemonic** ONECASE
- **Description** Every switch statement shall have at least one case clause (see [MISRA-C:2004]: RULE 15.5).

Parameters shall be ordered: 'IN', 'OUT', 'IN OUT'.

- **Mnemonic** PARAMORDER
- **Description** Parameters shall be ordered: 'IN', 'OUT', 'IN OUT'.

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

Multiple Exit in loop

- **Mnemonic** SGLEXT
- **Description** There shall be a single exit by loop.

©

C

C Metrics

Andthen Operators

- **Mnemonic** ANTH
- **Description** Number of 'andthen' operators

Assignment Operators

- **Mnemonic** ASOP
- **Description** Number of assignment operators used in the source file

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC
- **Description** Number of lines of code containing only a brace in the source file(s).

Break in Loop

- **Mnemonic** BRKL
- **Description** Number of 'break' statements in loop in the function

Break in Switch

- **Mnemonic** BRKS
- **Description** Number of 'break' statements in 'switch' in the function

Case Blocks

- **Mnemonic** CABL
- **Description** Number of 'case' blocks in 'switch' in the function

Calls To

- **Mnemonic** CAL2
- **Description** Number of explicit calls to the function.

Called Functions

- **Mnemonic** CALD
- **Description** Number of distinct functions defined in the project source file and called by the function.

Calls From

- **Mnemonic** CALF
- **Description** Number of explicit calls from the function.

Calling Functions

- **Mnemonic** CALI
- **Description** Number of distinct functions calling the function.

Called External Functions

- **Mnemonic** CALX
- **Description** Number of distinct external functions called by the function - external i.e. not defined in the project

Case Labels

- **Mnemonic** CASE
- **Description** Number of 'case' labels in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Recursive Calls

- **Mnemonic** CDRI
- **Description** Number of directly recursive calls in the function.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Called Depth

- **Mnemonic** CGDD
- **Description** Maximum depth of called functions.

Calling Depth

- **Mnemonic** CGDI
- **Description** Maximum depth of calling functions.

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Minimum Number of Indirect Cycles

- **Mnemonic** CIRI
- **Description** Minimum number of indirect call graph cycles in which the function is involved (excluding recursive calls).

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Comparison Operators

- **Mnemonic** CPOP
- **Description** Number of comparison operators used in the source file

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL

- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Default Statement

- **Mnemonic** DEFT
- **Description** Number of 'default' blocks in 'switch' in the function

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Do While Statements

- **Mnemonic** DOWH
- **Description** Number of 'do...while' statements in the function

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Goto Statements

- **Mnemonic** GOTO
- **Description** Number of 'goto' statements

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening brace.

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Use of longjump

- **Mnemonic** LONGJMP
- **Description** Use of longjump

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Memory Allocation

- **Mnemonic** MEMALLOC
- **Description** Memory Allocation

Memory Freeing

- **Mnemonic** MEMFREE
- **Description** Memory Freeing

Mixed Lines

- **Mnemonic** MLOC
- **Description** Number of lines containing both code and comment in the source files.

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Number of Parameters

- **Mnemonic** NOP
- **Description** Number of formal parameters in the function

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

Use of offsetof

- **Mnemonic** OFFSETOF
- **Description** Use of offsetof

Or else operators

- **Mnemonic** OREL
- **Description** Number of 'or else' operators

Number of #DEFINE

- **Mnemonic** P_DEFINE
- **Description** Number of #DEFINE

Number of #ELIF

- **Mnemonic** P_ELIF
- **Description** Number of #ELIF

Number of #ELSE

- **Mnemonic** P_ELSE
- **Description** Number of #ELSE

Number of #ENDIF

- **Mnemonic** P_ENDIF
- **Description** Number of #ENDIF

Number of #ERROR

- **Mnemonic** P_ERROR
- **Description** Number of #ERROR

Number of #IF

- **Mnemonic** P_IF
- **Description** Number of #IF

Number of #IFDEF

- **Mnemonic** P_IFDEF
- **Description** Number of #IFDEF

Number of #IFDEF

- **Mnemonic** P_IFNDEF
- **Description** Number of #IFDEF

Number of Include

- **Mnemonic** P_INCLUDE
- **Description** Number of Include

Compiler FLAG Nested Level

- **Mnemonic** P_NEST
- **Description** Compiler FLAG Nested Level

Number of #PRAGMA

- **Mnemonic** P_PRAGMA
- **Description** Number of #PRAGMA

Number of #UNDEF

- **Mnemonic** P_UNDEF
- **Description** Number of #UNDEF

Number of #WARNING

- **Mnemonic** P_WARNING
- **Description** Number of #WARNING

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Use of setjump

- **Mnemonic** SETJMP
- **Description** Use of setjump

Signal Functions

- **Mnemonic** SIGNAL
- **Description** Use of signal Functions

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Special Operators

- **Mnemonic** SPOP
- **Description** Number of special operators used in the source file

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

IO Functions

- **Mnemonic** STDIO
- **Description** Use IO Functions

String Conversions

- **Mnemonic** STRINGCONV
- **Description** Use of String Conversions

Switch Statements

- **Mnemonic** SWIT
- **Description** Number of 'switch' statements in the function

System Functions

- **Mnemonic** SYSCOM
- **Description** Use of system Functions

Ternary operators

- **Mnemonic** TERN
- **Description** Number of ternary operators i.e. ?:

Time Handling

- **Mnemonic** TIMEHDL
- **Description** Use of Time Handling

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

C Ruleset

Missing Break

- **Mnemonic** BRKFINAL
- **Description** An unconditional break statement shall terminate every non-empty switch clause (see [MISRA-C:2004]: RULE 15.2).

Backward Goto shall not be used

- **Mnemonic** BWGOTO
- **Description** Backward gotos shall not be used.

Missing compound statement

- **Mnemonic** COMPOUND
- **Description** The statement forming the body of a switch, while, do ... while or for statement shall be a compound statement (see [MISRA-C:2004]: RULE 14.8).

Missing compound if

- **Mnemonic** COMPOUNDIF
- **Description** An if (expression) construct shall be followed by a compound statement. The else keyword shall be followed by either a compound statement, or another if statement (see [MISRA-C:2004]: RULE 14.9).

Commented-out Source Code is not allowed

- **Mnemonic** R_CSTAT
- **Description** Commented-out Source Code is not allowed

Missing Default

- **Mnemonic** DEFAULT
- **Description** The final clause of a switch statement shall be the default clause (see [MISRA-

C:2004]: RULE 15.3).

Dynamic Memory Allocation shall not be used

- **Mnemonic** DYNMEMALLOC
- **Description** Dynamic heap memory allocation shall not be used. This precludes the use of the functions `calloc`, `malloc`, `realloc` and `free` (see [MISRA-C:2004]: RULE 20.4)

Missing final else

- **Mnemonic** ELSEFINAL
- **Description** All `if ... else if` constructs shall be terminated with an `else` clause (see [MISRA-C:2004]: RULE 14.10).

Macro `longjmp` or `setjmp` shall not be used

- **Mnemonic** JUMP
- **Description** (The `setjmp` macro and the `longjmp` function shall not be used (see [MISRA-C:2004]: RULE 20.7).

Nesting Level of Preprocessing directives is too high

- **Mnemonic** R_MAXPNEST
- **Description** Nesting Level of Preprocessing directives is too high

Assignment in Boolean

- **Mnemonic** NOASGCOND
- **Description** Assignment operators shall not be used in expressions that yield a boolean value

Assignment without Comparison

- **Mnemonic** NOASGINBOOL
- **Description** Assignment operators shall not be used in expressions that do not contain comparison operators.

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

There shall be a no code before first case

- **Mnemonic** NOCODEBEFORECASE
- **Description** There shall be a no code before the first case of a switch statement.

Continue shall not be used

- **Mnemonic** NOCONT
- **Description** The 'continue' statement shall not be used (see [MISRA-C:2004]: RULE 14.5).

Fallthrough shall be avoided

- **Mnemonic** NOFALLTHROUGH
- **Description** There shall be no fallthrough the next case in a switch statement.

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Goto shall not be used

- **Mnemonic** NOGOTO
- **Description** The 'goto' statement shall not be used (see [MISRA-C:2004]: RULE 14.4).

Label out a switch

- **Mnemonic** NOLABEL
- **Description** A switch label shall only be used when the most closely-enclosing compound statement is the body of a switch statement (see [MISRA-C:2004]: RULE 15.1).

Recursion are not allowed

- **Mnemonic** NORECURSION
- **Description** Functions shall not called themselves either directly or indirectly (see [MISRA-C:2004]: RULE 16.2).

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

Macro offsetof shall not be used

- **Mnemonic** OFFSETOF
- **Description** The macro offsetof, in library <stddef.h>, shall not be used (see [MISRA-C:2004]: RULE 20.6).

Missing case in switch

- **Mnemonic** ONECASE
- **Description** Every switch statement shall have at least one case clause (see [MISRA-C:2004]: RULE 15.5).

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

Risky Empty Statement

- **Mnemonic** RISKYEMPTY
- **Description** Risky Empty Statement

Multiple break in loop are not allowed

- **Mnemonic** SGLBRK
- **Description** For any iteration statement there shall be at most one 'break' statement used for loop termination (see [MISRA-C:2004]: RULE 14.6).

Signal or Raise shall not be used

- **Mnemonic** SIGNAL
- **Description** The signal handling facilities of <signal.h> shall not be used (see [MISRA-C:2004]: RULE 20.8).

IO Functions shall not be used

- **Mnemonic** STDIO
- **Description** The input/output library <stdio.h> shall not be used in production code (see [MISRA-C:2004]: RULE 20.9).

'atof, atoi or atol' shall not be used

- **Mnemonic** STRINGCONV

- **Description** The library functions atof, atoi and atol from library <stdlib.h> shall not be used (see [MISRA-C:2004]: RULE 20.10).

'abort, exit, getenv or system' shall not be used

- **Mnemonic** SYSCOM
- **Description** The library functions abort, exit, getenv and system from library <stdlib.h> shall not be used (see [MISRA-C:2004]: RULE 20.11).

Time Handling Functions shall not be used

- **Mnemonic** TIMEHDL
- **Description** The time handling functions of library <time.h> shall not be used: time, strftime, clock, difftime, mktime (see [MISRA-C:2004]: RULE 20.12).

COBOL

COBOL Metrics

Arithmetic Operators

- **Mnemonic** AROP
- **Description** Number of arithmetic operators

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

CALL Statements

- **Mnemonic** CALL
- **Description** Number of CALL statements

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Comment lines with code

- **Mnemonic** CLOC_CODE
- **Description** Number of lines of comments in the source file(s) whose first word is a keyword.

Comment lines without alphabetic characters

- **Mnemonic** CLOC_NULL
- **Description** Number of lines of comments in the source file(s) without alphabetic character.

Real comment lines with alphabetic characters

- **Mnemonic** CLOC_REAL
- **Description** Number of real lines of comments in the source file(s) with alphabetic characters.

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Conditions

- **Mnemonic** COND
- **Description** Number of conditions

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Debug lines

- **Mnemonic** DEBUG
- **Description** Number of lines of debug in the source file(s).

DISPLAY statements

- **Mnemonic** DISPLAY
- **Description** Number of DISPLAY statements

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operands in Data Div.

- **Mnemonic** DOPD_DD
- **Description** Number of distinct operands in Data Division: variables and constants ([Halstead,76]: n2)

Distinct Operands in Procedure Div.

- **Mnemonic** DOPD_PD
- **Description** Number of distinct operands in Procedure Division: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Distinct Operators in Data Div.

- **Mnemonic** DOPT_DD
- **Description** Number of distinct operators in Data Division: language keywords ([Halstead,76]: n1)

Distinct Operators in Procedure Div.

- **Mnemonic** DOPT_PD
- **Description** Number of distinct operators in Procedure Division: language keywords ([Halstead,76]: n1)

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

EVALUATE Statements

- **Mnemonic** EVAL
- **Description** Number of EVALUATE statements

Call to exit

- **Mnemonic** EXIT
- **Description** Number of calls to the exit function

File Declarations

- **Mnemonic** FD
- **Description** Number of file declarations

Files Used

- **Mnemonic** FDUS
- **Description** Number of references to files

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

Goto Statements

- **Mnemonic** GOTO
- **Description** Number of 'goto' statements

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

Is IDMS active

- **Mnemonic** IDMS_ACTIVE
- **Description** Is IDMS active in program

IDMS instructions called

- **Mnemonic** IDMS_CALLBD
- **Description** Number of IDMS instructions called

IDMS records called

- **Mnemonic** IDMS_CALLREC
- **Description** Number of IDMS records called

IDMS calls for modification

- **Mnemonic** IDMS_MOD
- **Description** Number of calls for modification

IDMS calls for reading/searching

- **Mnemonic** IDMS_READ
- **Description** Number of calls for reading/searching

IDMS subschema definition

- **Mnemonic** IDMS_SSCH
- **Description** Number of IDMS subschema definition

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Number of paragraphs

- **Mnemonic** PARA
- **Description** Number of paragraphs.

PERFORM Statements

- **Mnemonic** PERF
- **Description** Number of PERFORM statements

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Data Declarations

- **Mnemonic** SD
- **Description** Number of data declarations

Data Used

- **Mnemonic** SDUS
- **Description** Number of used data

Number of Sections

- **Mnemonic** SECT
- **Description** Number of sections.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

STOP Statements

- **Mnemonic** STOP
- **Description** Number of STOP statements

TIMES Clauses

- **Mnemonic** TIME
- **Description** Number of TIMES clauses in PERFORM statements

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operand Occurrences in Data Div.

- **Mnemonic** TOPD_DD
- **Description** Number of occurrences of operands in Data Division: variables and constants ([Halstead,76]: N2)

Operand Occurrences in Procedure Div.

- **Mnemonic** TOPD_PD
- **Description** Number of occurrences of operands in Procedure Division: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Operator Occurrences in Data Div.

- **Mnemonic** TOPT_DD
- **Description** Number of occurrences of operators in Data Division: language keywords ([Halstead,76]: N1)

Operator Occurrences in Procedure Div.

- **Mnemonic** TOPT_PD
- **Description** Number of occurrences of operators in Procedure Division: language keywords ([Halstead,76]: N1)

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD

- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

UNTIL Clauses

- **Mnemonic** UNTL
- **Description** Number of UNTIL clauses in PERFORM statements

VARYING Clauses

- **Mnemonic** VARY
- **Description** Number of VARYING clauses in PERFORM statements

WHEN Clauses

- **Mnemonic** WHEN
- **Description** Number of WHEN and WHENOTHER clauses in EVALUATE Statements

COBOL Ruleset

BLOCK Clause

- **Mnemonic** BLOCKSIZE
- **Description** In the FILE-DESCRIPTION section, each file description shall always use the BLOCK CONTAINS 0 RECORDS clause. The system will assign the BLOCK-SIZE automatically when allocating the file.

Column 7 for * and D Only

- **Mnemonic** COLUMN7
- **Description** Only * and D shall be used in column 7.

Comment Division

- **Mnemonic** COMMENT_DIVISION
- **Description** A comment is recommended before each division.

Comment FD

- **Mnemonic** COMMENT_FD
- **Description** A comment is recommended before each file description.

Comment First Level

- **Mnemonic** COMMENT_FIRST_LEVEL
- **Description** A comment is recommended before each first level of IF or PERFORM.

Comment Variable 01 and 77

- **Mnemonic** COMMENT_FIRST_VARIABLE
- **Description** A comment is recommended before each variable 01 and 77.

Empty lines around DIVISION

- **Mnemonic** CPRS_DIVISION
- **Description** An empty line shall precede and follow a DIVISION.

Empty line after EXIT

- **Mnemonic** CPRS_EXIT
- **Description** An empty line shall follow an EXIT statement.

Bad statement indentation

- **Mnemonic** CPRS_INDENT
- **Description** The nested statements shall be indented.

Bad indentation of scope terminator

- **Mnemonic** CPRS_SCOPE_TERMINATOR
- **Description** Scope terminators must be on the same column as the beginning of the block to facilitate program readability.

Empty line after SECTION

- **Mnemonic** CPRS_SECTION
- **Description** An empty line shall follow a SECTION.

Variable declaration format

- **Mnemonic** DCLWS
- **Description** A variable shall be declared in the WORKING STORAGE using the format ^W

Paragraphs having exact same name

- **Mnemonic** R_DUPPARA
- **Description** Paragraphs having exact same name in the same PROGRAM-ID is forbidden.

Missing END-EVALUATE

- **Mnemonic** EVALWITHENDEVAL
- **Description** An EVALUATE statement shall be closed by END-EVALUATE

Close file once

- **Mnemonic** FILECLOSEONCE
- **Description** A file shall be closed only once

Close open file

- **Mnemonic** FILEOPENCLOSE
- **Description** A file shall be opened and closed in the same program

Open file once

- **Mnemonic** FILEOPENONCE
- **Description** A file shall be opened only once

Use FILE STATUS

- **Mnemonic** FILESTATUS
- **Description** FILE STATUS shall be used to manage I/O errors.

Single GOBACK

- **Mnemonic** GOBACK
- **Description** Only a single GOBACK shall be used in a subprogram.

IDMS FIND CURRENT

- **Mnemonic** IDMSFINDCURRENT
- **Description** IDMS FIND CURRENT is forbidden

IDMS One modify by PERFORM

- **Mnemonic** IDMSONEMODFORPERF
- **Description** Each IDMS modify statement (MODIFY/ERASE/STORE) should be in a specific perform

IDMS One same call

- **Mnemonic** IDMSONESAMECALL
- **Description** Avoid duplicated IDMS call.

IDMS Ready Protected Update

- **Mnemonic** IDMSREADYPRTUPD
- **Description** Each IDMS Ready Update statement should be defined in PROTECTED mode.

IDMS Return Code

- **Mnemonic** IDMSRETURNCODE
- **Description** After each IDMS statement, return code should be checked.

Missing END-IF

- **Mnemonic** IFWITHENDIF
- **Description** An IF statement shall be closed by an END-IF

Avoid using inline PERFORM with too many lines of code

- **Mnemonic** INLINE_PERFORM_SIZE
- **Description** Avoid Cobol programs containing PERFORM - END-PERFORM loops with more than 80 lines.

Standard Label

- **Mnemonic** LABELSTD
- **Description** In the FILE-DESCRIPTION section, each file description shall always use the LABEL RECORD STANDARD clause. Only the standard labels are checked by the system.

Missing END-ADD

- **Mnemonic** MISSING_END_ADD
- **Description** An ADD statement shall be closed by an END-ADD.

Missing END-CALL

- **Mnemonic** MISSING_END_CALL
- **Description** An CALL statement shall be closed by an END-CALL.

Missing END-COMPUTE

- **Mnemonic** MISSING_END_COMPUTE
- **Description** An COMPUTE statement shall be closed by an END-COMPUTE.

Missing END-DELETE

- **Mnemonic** MISSING_END_DELETE
- **Description** An DELETE statement shall be closed by an END-DELETE.

Missing END-DIVIDE

- **Mnemonic** MISSING_END_DIVIDE
- **Description** An DIVIDE statement shall be closed by an END-DIVIDE.

Missing END-MULTIPLY

- **Mnemonic** MISSING_END_MULTIPLY
- **Description** An MULTIPLY statement shall be closed by an END-MULTIPLY.

Missing END-READ

- **Mnemonic** MISSING_END_READ
- **Description** An READ statement shall be closed by an END-READ.

Missing END-RETURN

- **Mnemonic** MISSING_END_RETURN
- **Description** An RETURN statement shall be closed by an END-RETURN.

Missing END-REWRITE

- **Mnemonic** MISSING_END_REWRITE
- **Description** An REWRITE statement shall be closed by an END-REWRITE.

Missing END-SEARCH

- **Mnemonic** MISSING_END_SEARCH
- **Description** An SEARCH statement shall be closed by an END-SEARCH.

Missing END-START

- **Mnemonic** MISSING_END_START
- **Description** An START statement shall be closed by an END-START.

Missing END-STRING

- **Mnemonic** MISSING_END_STRING
- **Description** An STRING statement shall be closed by an END-STRING.

Missing END-SUBTRACT

- **Mnemonic** MISSING_END_SUBTRACT
- **Description** An SUBTRACT statement shall be closed by an END-SUBTRACT.

Missing END-UNSTRING

- **Mnemonic** MISSING_END_UNSTRING
- **Description** An UNSTRING statement shall be closed by an END-UNSTRING.

Missing END-WRITE

- **Mnemonic** MISSING_END_WRITE
- **Description** An WRITE statement shall be closed by an END-WRITE.

Missing FILLER

- **Mnemonic** MISSING_FILLER
- **Description** Even the 'FILLER' word is optional since Cobol85, it is recommended to write it.

No more than 3 nested IF

- **Mnemonic** NESTEDIF
- **Description** There shall be no more than 3 nested IF statements

Nested Program

- **Mnemonic** NESTED_PROGRAM
- **Description** Nested program is not recommended

ALTER shall not be used

- **Mnemonic** NOALTER
- **Description** The ALTER statement shall not be used. Labels are decided only at execution time.

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

No Conditional GOTO

- **Mnemonic** NOCONDGOTO
- **Description** Conditional GO TO shall not be used. Use EVALUATE instead.

No MOVE CORRESPONDING

- **Mnemonic** NOCORRESPONDING
- **Description** MOVE CORRESPONDING shall not be used.

COMPUTE instead of ADD

- **Mnemonic** NOCPXADD
- **Description** COMPUTE shall be used to add more than 2 data instead of ADD.

COMPUTE instead of SUBTRACT

- **Mnemonic** NOCPXSUBTRACT
- **Description** COMPUTE shall be used to add more than 2 data instead of SUBTRACT.

No DEBUG MODE

- **Mnemonic** NODEBUG
- **Description** DEBUGGING-MODE shall not be used

COMPUTE instead of DIVIDE

- **Mnemonic** NODIVIDE
- **Description** COMPUTE shall be used instead of DIVIDE.

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

No INITIALIZE

- **Mnemonic** NOINITIALIZE
- **Description** INITIALIZE shall not be used. Use MOVE to initialize variable.

COMPUTE instead of MULTIPLY

- **Mnemonic** NOMULTIPLY

- **Description** COMPUTE shall be used instead of MULTIPLY.

No procedural COPY

- **Mnemonic** NOPROCCOPY
- **Description** Procedural COPY clauses shall not be used. Use subprograms instead.

No RENAMES

- **Mnemonic** NORENAMES
- **Description** The RENAMES clause shall not be used.

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

No Variables S9(9)

- **Mnemonic** NOVARS9
- **Description** The variables shall not be declared in S9(9) COMP. It implies a conversion

Avoid GOTO jumps out of PERFORM range

- **Mnemonic** NO_GOTO_OUT_OF_PERFORM_RANGE
- **Description** Avoid Cobol Programs containing sections or paragraphs that are called by PERFORM statements and that contain a GO TO statement to another section or paragraph that is not in the scope of the initial PERFORM.

Avoid OPEN/CLOSE inside loops

- **Mnemonic** NO_OPEN_CLOSE_INSIDE_LOOP
- **Description** Avoid Cobol programs using OPEN or CLOSE in loops. Following loops are taken into account: - PERFORM TIMES / UNTIL / VARYING

Avoid accessing data by using the position and length

- **Mnemonic** NO_REFERENCE_ACCESS
- **Description** Avoid Cobol programs accessing part of data by using a position and a length.

Use COMP for OCCURS

- **Mnemonic** OCCURSCOMP
- **Description** For the OCCURS DEPENDING ON clause, the corresponding item shall be declared using COMP or BINARY.

Avoid mixing paragraphs and sections

- **Mnemonic** PARA_OR_SECT_ONLY
- **Description** A program should not mix paragraphs and sections.

Perform with no THRU

- **Mnemonic** PERFORMWITHTHRU
- **Description** The call of a paragraph shall be made in the use of PERFORM paragraphName THRU paragraphNameExit.

Bad paragraph position used in PERFORM

- **Mnemonic** POSITION_OF_PERFORM_RANGE
- **Description** On a PERFORM range: P1 THRU P2, P1 must be declared before P2.

READ-WRITE Instruction

- **Mnemonic** READWRITE
- **Description** READ A INTO B or WRITE A FROM B forms shall be used for reading/writing a file.

Avoid using READ statement without AT END clause

- **Mnemonic** READ_AT_END
- **Description** Avoid Cobol programs using READ statements without the AT END clause.

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Statement shall be in uppercase

- **Mnemonic** UPPERCASE
- **Description** A COBOL statement shall be written in uppercase to keep the program readable.

Use SYNCHRONIZED

- **Mnemonic** USESYNCH
- **Description** SYNCHRONIZED shall be used for COMP, COMP-1, COMP-2, POINTER and INDEX variables.

Homonymous variable shall not be used

- **Mnemonic** VARNAME
- **Description** There shall be no homonymous variables.

Use WHEN OTHER

- **Mnemonic** WHENOTHER
- **Description** EVALUATE shall end by a WHEN OTHER clause.

C++

C++ Metrics

Constant Data

- **Mnemonic** ACST
- **Description** Number of constant data

Number of Attributes

- **Mnemonic** ANBR
- **Description** Number of attributes

Number of data without accessibility

- **Mnemonic** ANON
- **Description** Number of data without accessibility

Andthen Operators

- **Mnemonic** ANTH
- **Description** Number of 'andthen' operators

Public Data

- **Mnemonic** APBL
- **Description** Number of public data

Protected Data

- **Mnemonic** APRT
- **Description** Number of protected data

Private data

- **Mnemonic** APRV
- **Description** Number of private data

Assignment Operators

- **Mnemonic** ASOP
- **Description** Number of assignment operators used in the source file

Static Data

- **Mnemonic** ASTA
- **Description** Number of static data

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC
- **Description** Number of lines of code containing only a brace in the source file(s).

Break in Loop

- **Mnemonic** BRKL
- **Description** Number of 'break' statements in loop in the function

Break in Switch

- **Mnemonic** BRKS
- **Description** Number of 'break' statements in 'switch' in the function

Case Blocks

- **Mnemonic** CABL
- **Description** Number of 'case' blocks in 'switch' in the function

Case Labels

- **Mnemonic** CASE
- **Description** Number of 'case' labels in the function

Catch Statements

- **Mnemonic** CATC
- **Description** Number of 'catch' statements in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Comparison Operators

- **Mnemonic** CPOP
- **Description** Number of comparison operators used in the source file

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Depth of Descendant Tree

- **Mnemonic** DDT
- **Description** Maximun depth of the inheritance tree from the class

Default Statement

- **Mnemonic** DEFT
- **Description** Number of 'default' blocks in 'switch' in the function

Depth of Inheritance Tree

- **Mnemonic** DIT
- **Description** Maximun depth of the class inheritance tree

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Do While Statements

- **Mnemonic** DOWH
- **Description** Number of 'do...while' statements in the function

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Goto Statements

- **Mnemonic** GOTO
- **Description** Number of 'goto' statements

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening brace.

Cloned Code

- **Mnemonic** ICC

- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Constant Methods

- **Mnemonic** MCST
- **Description** Number of 'constant' methods i.e. which do not modify the object

Multiple Inheritance Indicator

- **Mnemonic** MII
- **Description** Number of classes from which the class inherits directly

Mixed Lines

- **Mnemonic** MLOC
- **Description** Number of lines containing both code and comment in the source files.

Methods without Accessibility

- **Mnemonic** MNON
- **Description** Number of methods without any accessibility specifier

Public Methods

- **Mnemonic** MPBL
- **Description** Number of public methods

Protected Methods

- **Mnemonic** MPRT
- **Description** Number of protected methods

Private Methods

- **Mnemonic** MPRV
- **Description** Number of private methods

Static Methods

- **Mnemonic** MSTA
- **Description** Number of static methods

Number of Ancestors

- **Mnemonic** NAC
- **Description** Number of classes from which the class inherits directly or indirectly

Number of Descendants

- **Mnemonic** NDC
- **Description** Number of classes which inherit from the class directly or indirectly

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Number Of Children

- **Mnemonic** NOC
- **Description** Number of classes which inherit directly from the class

Number of Parameters

- **Mnemonic** NOP
- **Description** Number of formal parameters in the function

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

Orelse operators

- **Mnemonic** OREL
- **Description** Number of 'orelse' operators

Number of #DEFINE

- **Mnemonic** P_DEFINE
- **Description** Number of #DEFINE

Number of #ELIF

- **Mnemonic** P_ELIF
- **Description** Number of #ELIF

Number of #ELSE

- **Mnemonic** P_ELSE
- **Description** Number of #ELSE

Number of #ENDIF

- **Mnemonic** P_ENDIF
- **Description** Number of #ENDIF

Number of #ERROR

- **Mnemonic** P_ERROR
- **Description** Number of #ERROR

Number of #IF

- **Mnemonic** P_IF
- **Description** Number of #IF

Number of #IFDEF

- **Mnemonic** P_IFDEF
- **Description** Number of #IFDEF

Number of #IFNDEF

- **Mnemonic** P_IFNDEF
- **Description** Number of #IFNDEF

Number of Include

- **Mnemonic** P_INCLUDE
- **Description** Number of Include

Compiler FLAG Nested Level

- **Mnemonic** P_NEST
- **Description** Compiler FLAG Nested Level

Number of #PRAGMA

- **Mnemonic** P_PRAGMA
- **Description** Number of #PRAGMA

Number of #UNDEF

- **Mnemonic** P_UNDEF
- **Description** Number of #UNDEF

Number of #WARNING

- **Mnemonic** P_WARNING
- **Description** Number of #WARNING

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Special Operators

- **Mnemonic** SPOP
- **Description** Number of special operators used in the source file

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

Switch Statements

- **Mnemonic** SWIT
- **Description** Number of 'switch' statements in the function

Ternary operators

- **Mnemonic** TERN
- **Description** Number of ternary operators i.e. ?:

Throw Statements

- **Mnemonic** THRO
- **Description** Number of 'throw' statements in the function

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Try Statements

- **Mnemonic** TRY
- **Description** Number of 'try' statements in the function

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

Weighted Method per Class

- **Mnemonic** XWMC
- **Description** Sum of cyclomatic complexities of methods implemented outside the class definition

C++ Ruleset

Missing Break

- **Mnemonic** BRKFINAL
- **Description** An unconditional break statement shall terminate every non-empty switch clause (see [MISRA-C:2004]: RULE 15.2).

Backward Goto shall not be used

- **Mnemonic** BWGOTO
- **Description** Backward gotos shall not be used.

Missing compound statement

- **Mnemonic** COMPOUND
- **Description** The statement forming the body of a switch, while, do ... while or for statement shall be a compound statement (see [MISRA-C:2004]: RULE 14.8).

Missing compound if

- **Mnemonic** COMPOUNDIF
- **Description** An if (expression) construct shall be followed by a compound statement. The else keyword shall be followed by either a compound statement, or another if statement (see [MISRA-C:2004]: RULE 14.9).

Commented-out Source Code is not allowed

- **Mnemonic** R_CSTAT
- **Description** Commented-out Source Code is not allowed

Missing Default

- **Mnemonic** DEFAULT
- **Description** The final clause of a switch statement shall be the default clause (see [MISRA-C:2004]: RULE 15.3).

Missing final else

- **Mnemonic** ELSEFINAL
- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-C:2004]: RULE 14.10).

Nesting Level of Preprocessing directives is too high

- **Mnemonic** R_MAXPNEST
- **Description** Nesting Level of Preprocessing directives is too high

Assignment in Boolean

- **Mnemonic** NOASGCOND
- **Description** Assignment operators shall not be used in expressions that yield a boolean value

Assignment without Comparison

- **Mnemonic** NOASGINBOOL
- **Description** Assignment operators shall not be used in expressions that do not contain comparison operators.

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

There shall be a no code before first case

- **Mnemonic** NOCODEBEFORECASE
- **Description** There shall be a no code before the first case of a switch statement.

Continue shall not be used

- **Mnemonic** NOCONT
- **Description** The 'continue' statement shall not be used (see [MISRA-C:2004]: RULE 14.5).

Fallthrough shall be avoided

- **Mnemonic** NOFALLTHROUGH
- **Description** There shall be no fallthrough the next case in a switch statement.

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Goto shall not be used

- **Mnemonic** NOGOTO
- **Description** The 'goto' statement shall not be used (see [MISRA-C:2004]: RULE 14.4).

Label out a switch

- **Mnemonic** NOLABEL
- **Description** A switch label shall only be used when the most closely-enclosing compound statement is the body of a switch statement (see [MISRA-C:2004]: RULE 15.1).

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

Missing case in switch

- **Mnemonic** ONECASE
- **Description** Every switch statement shall have at least one case clause (see [MISRA-C:2004]:

RULE 15.5).

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

Risky Empty Statement

- **Mnemonic** RISKYEMPTY
- **Description** Risky Empty Statement

Multiple break in loop are not allowed

- **Mnemonic** SGLBRK
- **Description** For any iteration statement there shall be at most one 'break' statement used for loop termination (see [MISRA-C:2004]: RULE 14.6).

C#

C# Metrics

Constant Data

- **Mnemonic** ACST
- **Description** Number of constant data

Internal Data

- **Mnemonic** AINT
- **Description** Number of internal data (only applicable to C#)

Number of Attributes

- **Mnemonic** ANBR
- **Description** Number of attributes

Number of data without accessibility

- **Mnemonic** ANON
- **Description** Number of data without accessibility

Andthen Operators

- **Mnemonic** ANTH

- **Description** Number of 'andthen' operators

Public Data

- **Mnemonic** APBL
- **Description** Number of public data

Protected Internal Data

- **Mnemonic** APIN
- **Description** Number of protected internal data (only applicable to C#)

Protected Data

- **Mnemonic** APRT
- **Description** Number of protected data

Private data

- **Mnemonic** APRV
- **Description** Number of private data

Assignment Operators

- **Mnemonic** ASOP
- **Description** Number of assignment operators used in the source file

Static Data

- **Mnemonic** ASTA
- **Description** Number of static data

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC
- **Description** Number of lines of code containing only a brace in the source file(s).

Break in Loop

- **Mnemonic** BRKL
- **Description** Number of 'break' statements in loop in the function

Break in Switch

- **Mnemonic** BRKS
- **Description** Number of 'break' statements in 'switch' in the function

Case Blocks

- **Mnemonic** CABL
- **Description** Number of 'case' blocks in 'switch' in the function

Case Labels

- **Mnemonic** CASE
- **Description** Number of 'case' labels in the function

Catch Statements

- **Mnemonic** CATC
- **Description** Number of 'catch' statements in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Comparison Operators

- **Mnemonic** CPOP
- **Description** Number of comparison operators used in the source file

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Depth of Descendant Tree

- **Mnemonic** DDT
- **Description** Maximun depth of the inheritance tree from the class

Default Statement

- **Mnemonic** DEFT
- **Description** Number of 'default' blocks in 'switch' in the function

Depth of Inheritance Tree

- **Mnemonic** DIT
- **Description** Maximun depth of the class inheritance tree

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Do While Statements

- **Mnemonic** DOWH
- **Description** Number of 'do...while' statements in the function

Else Statements

- **Mnemonic** ELSE

- **Description** Number of 'else' statements

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

Foreach Statements

- **Mnemonic** FORE
- **Description** Number of 'foreach' statements in the function

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Goto Statements

- **Mnemonic** GOTO
- **Description** Number of 'goto' statements

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening brace.

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Constant Methods

- **Mnemonic** MCST
- **Description** Number of 'constant' methods i.e. which do not modify the object

Multiple Inheritance Indicator

- **Mnemonic** MII
- **Description** Number of classes from which the class inherits directly

Internal Methods

- **Mnemonic** MINT
- **Description** Number of internal methods (only applicable to C#)

Mixed Lines

- **Mnemonic** MLOC
- **Description** Number of lines containing both code and comment in the source files.

Methods without Accessibility

- **Mnemonic** MNON
- **Description** Number of methods without any accessibility specifier

Public Methods

- **Mnemonic** MPBL
- **Description** Number of public methods

Protected Internal Methods

- **Mnemonic** MPIN
- **Description** Number of protected internal methods(only applicable to C#)

Protected Methods

- **Mnemonic** MPRT
- **Description** Number of protected methods

Private Methods

- **Mnemonic** MPRV
- **Description** Number of private methods

Static Methods

- **Mnemonic** MSTA
- **Description** Number of static methods

Number of Ancestors

- **Mnemonic** NAC
- **Description** Number of classes from which the class inherits directly or indirectly

Number of Descendants

- **Mnemonic** NDC
- **Description** Number of classes which inherit from the class directly or indirectly

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Number Of Children

- **Mnemonic** NOC
- **Description** Number of classes which inherit directly from the class

Number of Parameters

- **Mnemonic** NOP
- **Description** Number of formal parameters in the function

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

Or else operators

- **Mnemonic** OREL
- **Description** Number of 'or else' operators

Constant Properties

- **Mnemonic** PCST
- **Description** Number of constant properties

Properties with Get

- **Mnemonic** PGET
- **Description** Number of properties with a setter (only applicable to C#)

Internal Properties

- **Mnemonic** PINT
- **Description** Number of internal properties (only applicable to C#)

Properties

- **Mnemonic** PNBR
- **Description** Total number of properties

Properties without Accessibility

- **Mnemonic** PNON
- **Description** Number of properties without accessibility specifier

Public Properties

- **Mnemonic** PPBL
- **Description** Number of public properties

Protected Internal Properties

- **Mnemonic** PPIN
- **Description** Number of protected internal properties (only applicable to C#)

Protected Properties

- **Mnemonic** PPRT
- **Description** Number of protected properties

Private Properties

- **Mnemonic** PPRV
- **Description** Number of private properties

Properties with Set

- **Mnemonic** PSET
- **Description** Number of properties with a getter (only applicable to C#)

Static Properties

- **Mnemonic** PSTA
- **Description** Number of static properties in the class

Number of #DEFINE

- **Mnemonic** P_DEFINE
- **Description** Number of #DEFINE

Number of #ELIF

- **Mnemonic** P_ELIF
- **Description** Number of #ELIF

Number of #ELSE

- **Mnemonic** P_ELSE
- **Description** Number of #ELSE

Number of #ENDIF

- **Mnemonic** P_ENDIF
- **Description** Number of #ENDIF

Number of #ENDREGION

- **Mnemonic** P_ENDREGION
- **Description** Number of #ENDREGION

Number of #ERROR

- **Mnemonic** P_ERROR
- **Description** Number of #ERROR

Number of #IF

- **Mnemonic** P_IF
- **Description** Number of #IF

Number of #IFDEF

- **Mnemonic** P_IFDEF
- **Description** Number of #IFDEF

Number of #IFNDEF

- **Mnemonic** P_IFNDEF
- **Description** Number of #IFNDEF

Compiler FLAG Nested Level

- **Mnemonic** P_NEST
- **Description** Compiler FLAG Nested Level

Number of #PRAGMA

- **Mnemonic** P_PRAGMA
- **Description** Number of #PRAGMA

Number of #REGION

- **Mnemonic** P_REGION
- **Description** Number of #REGION

Number of #UNDEF

- **Mnemonic** P_UNDEF
- **Description** Number of #UNDEF

Number of #WARNING

- **Mnemonic** P_WARNING
- **Description** Number of #WARNING

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Special Operators

- **Mnemonic** SPOP
- **Description** Number of special operators used in the source file

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

Switch Statements

- **Mnemonic** SWIT
- **Description** Number of 'switch' statements in the function

Ternary operators

- **Mnemonic** TERN
- **Description** Number of ternary operators i.e. ?:

Throw Statements

- **Mnemonic** THRO
- **Description** Number of 'throw' statements in the function

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Try Statements

- **Mnemonic** TRY
- **Description** Number of 'try' statements in the function

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

C# Ruleset

Backward Goto shall not be used

- **Mnemonic** BWGOTO
- **Description** Backward gotos shall not be used.

Missing compound statement

- **Mnemonic** COMPOUND
- **Description** The statement forming the body of a switch, while, do ... while or for statement shall be a compound statement (see [MISRA-C:2004]: RULE 14.8).

Missing compound if

- **Mnemonic** COMPOUNDIF
- **Description** An if (expression) construct shall be followed by a compound statement. The else keyword shall be followed by either a compound statement, or another if statement (see [MISRA-C:2004]: RULE 14.9).

Commented-out Source Code is not allowed

- **Mnemonic** R_CSTAT
- **Description** Commented-out Source Code is not allowed

Missing Default

- **Mnemonic** DEFAULT
- **Description** The final clause of a switch statement shall be the default clause (see [MISRA-C:2004]: RULE 15.3).

Missing final else

- **Mnemonic** ELSEFINAL
- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-C:2004]: RULE 14.10).

Assignment in Boolean

- **Mnemonic** NOASGCOND
- **Description** Assignment operators shall not be used in expressions that yield a boolean value

Assignment without Comparison

- **Mnemonic** NOASGINBOOL
- **Description** Assignment operators shall not be used in expressions that do not contain comparison operators.

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

There shall be a no code before first case

- **Mnemonic** NOCODEBEFORECASE
- **Description** There shall be a no code before the first case of a switch statement.

Continue shall not be used

- **Mnemonic** NOCONT
- **Description** The 'continue' statement shall not be used (see [MISRA-C:2004]: RULE 14.5).

Fallthrough shall be avoided

- **Mnemonic** NOFALLTHROUGH
- **Description** There shall be no fallthrough the next case in a switch statement.

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Goto shall not be used

- **Mnemonic** NOGOTO
- **Description** The 'goto' statement shall not be used (see [MISRA-C:2004]: RULE 14.4).

Label out a switch

- **Mnemonic** NOLABEL
- **Description** A switch label shall only be used when the most closely-enclosing compound statement is the body of a switch statement (see [MISRA-C:2004]: RULE 15.1).

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

Missing case in switch

- **Mnemonic** ONECASE
- **Description** Every switch statement shall have at least one case clause (see [MISRA-C:2004]: RULE 15.5).

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

Risky Empty Statement

- **Mnemonic** RISKYEMPTY
- **Description** Risky Empty Statement

Multiple break in loop are not allowed

- **Mnemonic** SGLBRK
- **Description** For any iteration statement there shall be at most one 'break' statement used for loop termination (see [MISRA-C:2004]: RULE 14.6).

Fortran

Fortran Metrics

Andthen Operators

- **Mnemonic** ANTH
- **Description** Number of 'andthen' operators

Number of arithmetic if

- **Mnemonic** ARIF
- **Description** Count number of arithmetic if

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC
- **Description** Number of lines of code containing only a brace in the source file(s).

Break in Loop

- **Mnemonic** BRKL
- **Description** Number of 'break' statements in loop in the function

Case Blocks

- **Mnemonic** CABL
- **Description** Number of 'case' blocks in 'switch' in the function

Case Labels

- **Mnemonic** CASE
- **Description** Number of 'case' labels in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Number of declarative statements

- **Mnemonic** DECL
- **Description** Count number of declarative statements

Default Statement

- **Mnemonic** DEFT
- **Description** Number of 'default' blocks in 'switch' in the function

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Do While Statements

- **Mnemonic** DOWH
- **Description** Number of 'do...while' statements in the function

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Goto Statements

- **Mnemonic** GOTO
- **Description** Number of 'goto' statements

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening brace.

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Mixed Lines

- **Mnemonic** MLOC
- **Description** Number of lines containing both code and comment in the source files.

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Non-Cyclic Paths

- **Mnemonic** PATH

- **Description** Number of non-cyclic paths in the function.

Orelse operators

- **Mnemonic** OREL
- **Description** Number of 'orelse' operators

% of parsed tokens

- **Mnemonic** PARSE
- **Description** Percent of parsed tokens

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

Switch Statements

- **Mnemonic** SWIT
- **Description** Number of 'switch' statements in the function

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

Fortran Ruleset

Use of allocate/deallocate

- **Mnemonic** ALLOCATE_USE
- **Description** A function must have the same number of allocate and deallocate.

Backward Goto shall not be used

- **Mnemonic** BWGOTO
- **Description** Backward gotos shall not be used.

Use of contains

- **Mnemonic** CONTAINS_USE
- **Description** Use of contains is forbidden to declare functions inside another function.

Missing Default

- **Mnemonic** DEFAULT
- **Description** The final clause of a switch statement shall be the default clause (see [MISRA-C:2004]: RULE 15.3).

Use of continue is deprecated (Fortran)

- **Mnemonic** NOCONTINUE
- **Description** The 'continue' statement is deprecated.

Missing final else

- **Mnemonic** ELSEFINAL
- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-C:2004]: RULE 14.10).

Use of Fortran 77

- **Mnemonic** FORTRAN77_USE
- **Description** A project should not contain any Fortran 77 file.

Function size

- **Mnemonic** FUNCTION_SIZE
- **Description** The number of lines of code of a function must not exceed the limit.

Use of module

- **Mnemonic** MODULE_USE
- **Description** A function must be declared inside a Fortran module

Incorrect Function Name

- **Mnemonic** NAMING_FUNCTION
- **Description** Function name does not fit the convention.

Incorrect Module Name

- **Mnemonic** NAMING_MODULE
- **Description** Module name does not fit the convention.

Parameter name

- **Mnemonic** NAMING_PARAM
- **Description** A parameter name must comply with the minimum length.

Incorrect Program Name

- **Mnemonic** NAMING_PROGRAM
- **Description** Program name does not fit the convention.

Incorrect Subroutine Name

- **Mnemonic** NAMING_SUBROUTINE
- **Description** Subroutine name does not fit the convention.

Number of parameters

- **Mnemonic** NB_PARAM
- **Description** The number of parameters received by a function should not exceed the limit.

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

Continue shall not be used

- **Mnemonic** NOCONT
- **Description** The 'continue' statement shall not be used (see [MISRA-C:2004]: RULE 14.5).

'cycle' shall not be used

- **Mnemonic** NOCYCL
- **Description** The 'cycle' statement shall not be used.

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Goto shall not be used

- **Mnemonic** NOGOTO
- **Description** The 'goto' statement shall not be used (see [MISRA-C:2004]: RULE 14.4).

Label out a switch

- **Mnemonic** NOLABEL
- **Description** A switch label shall only be used when the most closely-enclosing compound statement is the body of a switch statement (see [MISRA-C:2004]: RULE 15.1).

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

'stop' shall not be used

- **Mnemonic** NOSTOP
- **Description** The 'stop' statement shall not be used.

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

Missing case in switch

- **Mnemonic** ONECASE
- **Description** Every switch statement shall have at least one case clause (see [MISRA-C:2004]: RULE 15.5).

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

Use of SAVE and DATA

- **Mnemonic** SAVE_DATA_USE
- **Description** A function must not use the SAVE and DATA statements.

Multiple exit

- **Mnemonic** SGLEXIT
- **Description** For any iteration statement there shall be at most one 'exit' statement used for loop termination.

Java

Java Metrics

Constant Data

- **Mnemonic** ACST
- **Description** Number of constant data

Number of Attributes

- **Mnemonic** ANBR
- **Description** Number of attributes

Number of data without accessibility

- **Mnemonic** ANON

- **Description** Number of data without accessibility

Andthen Operators

- **Mnemonic** ANTH
- **Description** Number of 'andthen' operators

Public Data

- **Mnemonic** APBL
- **Description** Number of public data

Protected Data

- **Mnemonic** APRT
- **Description** Number of protected data

Private data

- **Mnemonic** APRV
- **Description** Number of private data

Assignment Operators

- **Mnemonic** ASOP
- **Description** Number of assignment operators used in the source file

Static Data

- **Mnemonic** ASTA
- **Description** Number of static data

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC
- **Description** Number of lines of code containing only a brace in the source file(s).

Break in Loop

- **Mnemonic** BRKL
- **Description** Number of 'break' statements in loop in the function

Break in Switch

- **Mnemonic** BRKS
- **Description** Number of 'break' statements in 'switch' in the function

Case Blocks

- **Mnemonic** CABL
- **Description** Number of 'case' blocks in 'switch' in the function

Case Labels

- **Mnemonic** CASE
- **Description** Number of 'case' labels in the function

Catch Statements

- **Mnemonic** CATC
- **Description** Number of 'catch' statements in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Comparison Operators

- **Mnemonic** CPOP
- **Description** Number of comparison operators used in the source file

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Depth of Descendant Tree

- **Mnemonic** DDT
- **Description** Maximun depth of the inheritance tree from the class

Default Statement

- **Mnemonic** DEFT
- **Description** Number of 'default' blocks in 'switch' in the function

Depth of Inheritance Tree

- **Mnemonic** DIT
- **Description** Maximun depth of the class inheritance tree

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Do While Statements

- **Mnemonic** DOWH
- **Description** Number of 'do...while' statements in the function

Else Statements

- **Mnemonic** ELSE

- **Description** Number of 'else' statements

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening brace.

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Multiple Inheritance Indicator

- **Mnemonic** MII
- **Description** Number of classes from which the class inherits directly

Mixed Lines

- **Mnemonic** MLOC
- **Description** Number of lines containing both code and comment in the source files.

Methods without Accessibility

- **Mnemonic** MNON
- **Description** Number of methods without any accessibility specifier

Public Methods

- **Mnemonic** MPBL
- **Description** Number of public methods

Protected Methods

- **Mnemonic** MPRT
- **Description** Number of protected methods

Private Methods

- **Mnemonic** MPRV
- **Description** Number of private methods

Static Methods

- **Mnemonic** MSTA
- **Description** Number of static methods

Number of Ancestors

- **Mnemonic** NAC
- **Description** Number of classes from which the class inherits directly or indirectly

Number of Descendants

- **Mnemonic** NDC
- **Description** Number of classes which inherit from the class directly or indirectly

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Number Of Children

- **Mnemonic** NOC
- **Description** Number of classes which inherit directly from the class

Number of Parameters

- **Mnemonic** NOP
- **Description** Number of formal parameters in the function

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

Or else operators

- **Mnemonic** OREL
- **Description** Number of 'or else' operators

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Special Operators

- **Mnemonic** SPOP
- **Description** Number of special operators used in the source file

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

Switch Statements

- **Mnemonic** SWIT
- **Description** Number of 'switch' statements in the function

Ternary operators

- **Mnemonic** TERN

- **Description** Number of ternary operators i.e. ?:

Throw Statements

- **Mnemonic** THRO
- **Description** Number of 'throw' statements in the function

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Try Statements

- **Mnemonic** TRY
- **Description** Number of 'try' statements in the function

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

Java Ruleset

Missing Break

- **Mnemonic** BRKFINAL
- **Description** An unconditional break statement shall terminate every non-empty switch clause (see [MISRA-C:2004]: RULE 15.2).

Missing compound statement

- **Mnemonic** COMPOUND
- **Description** The statement forming the body of a switch, while, do ... while or for statement shall be a compound statement (see [MISRA-C:2004]: RULE 14.8).

Missing compound if

- **Mnemonic** COMPOUNDIF
- **Description** An if (expression) construct shall be followed by a compound statement. The else keyword shall be followed by either a compound statement, or another if statement (see [MISRA-C:2004]: RULE 14.9).

Commented-out Source Code is not allowed

- **Mnemonic** R_CSTAT
- **Description** Commented-out Source Code is not allowed

Missing Default

- **Mnemonic** DEFAULT
- **Description** The final clause of a switch statement shall be the default clause (see [MISRA-C:2004]: RULE 15.3).

Missing final else

- **Mnemonic** ELSEFINAL
- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-C:2004]: RULE 14.10).

Assignment in Boolean

- **Mnemonic** NOASGCOND
- **Description** Assignment operators shall not be used in expressions that yield a boolean value

Assignment without Comparison

- **Mnemonic** NOASGINBOOL
- **Description** Assignment operators shall not be used in expressions that do not contain comparison operators.

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

There shall be a no code before first case

- **Mnemonic** NOCODEBEFORECASE
- **Description** There shall be a no code before the first case of a switch statement.

Continue shall not be used

- **Mnemonic** NOCONT
- **Description** The 'continue' statement shall not be used (see [MISRA-C:2004]: RULE 14.5).

Fallthrough shall be avoided

- **Mnemonic** NOFALLTHROUGH
- **Description** There shall be no fallthrough the next case in a switch statement.

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

Missing case in switch

- **Mnemonic** ONECASE
- **Description** Every switch statement shall have at least one case clause (see [MISRA-C:2004]: RULE 15.5).

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

Risky Empty Statement

- **Mnemonic** RISKYEMPTY
- **Description** Risky Empty Statement

Multiple break in loop are not allowed

- **Mnemonic** SGLBRK
- **Description** For any iteration statement there shall be at most one 'break' statement used for loop termination (see [MISRA-C:2004]: RULE 14.6).

Javascript

Javascript Metrics

Andthen Operators

- **Mnemonic** ANTH
- **Description** Number of 'andthen' operators

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC
- **Description** Number of lines of code containing only a brace in the source file(s).

Break in Loop

- **Mnemonic** BRKL
- **Description** Number of 'break' statements in loop in the function

Break in Switch

- **Mnemonic** BRKS
- **Description** Number of 'break' statements in 'switch' in the function

Case Blocks

- **Mnemonic** CABL
- **Description** Number of 'case' blocks in 'switch' in the function

Case Labels

- **Mnemonic** CASE
- **Description** Number of 'case' labels in the function

Catch Statements

- **Mnemonic** CATC
- **Description** Number of 'catch' statements in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Default Statement

- **Mnemonic** DEFT
- **Description** Number of 'default' blocks in 'switch' in the function

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Do While Statements

- **Mnemonic** DOWH
- **Description** Number of 'do...while' statements in the function

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening brace.

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Mixed Lines

- **Mnemonic** MLOC

- **Description** Number of lines containing both code and comment in the source files.

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Number of Parameters

- **Mnemonic** NOP
- **Description** Number of formal parameters in the function

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

Or else operators

- **Mnemonic** OREL
- **Description** Number of 'or else' operators

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

Switch Statements

- **Mnemonic** SWIT
- **Description** Number of 'switch' statements in the function

Ternary operators

- **Mnemonic** TERN
- **Description** Number of ternary operators i.e. ?:

Throw Statements

- **Mnemonic** THRO
- **Description** Number of 'throw' statements in the function

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Try Statements

- **Mnemonic** TRY
- **Description** Number of 'try' statements in the function

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

Javascript Ruleset

Missing Break

- **Mnemonic** BRKFINAL
- **Description** An unconditional break statement shall terminate every non-empty switch clause (see [MISRA-C:2004]: RULE 15.2).

Missing compound statement

- **Mnemonic** COMPOUND
- **Description** The statement forming the body of a switch, while, do ... while or for statement shall be a compound statement (see [MISRA-C:2004]: RULE 14.8).

Missing compound if

- **Mnemonic** COMPOUNDIF
- **Description** An if (expression) construct shall be followed by a compound statement. The else keyword shall be followed by either a compound statement, or another if statement (see [MISRA-C:2004]: RULE 14.9).

Commented-out Source Code is not allowed

- **Mnemonic** R_CSTAT
- **Description** Commented-out Source Code is not allowed

Missing Default

- **Mnemonic** DEFAULT
- **Description** The final clause of a switch statement shall be the default clause (see [MISRA-C:2004]: RULE 15.3).

Missing final else

- **Mnemonic** ELSEFINAL
- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-C:2004]: RULE 14.10).

Assignment in Boolean

- **Mnemonic** NOASGCOND
- **Description** Assignment operators shall not be used in expressions that yield a boolean value

Assignment without Comparison

- **Mnemonic** NOASGINBOOL
- **Description** Assignment operators shall not be used in expressions that do not contain comparison operators.

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG

- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

There shall be a no code before first case

- **Mnemonic** NOCODEBEFORECASE
- **Description** There shall be a no code before the first case of a switch statement.

Continue shall not be used

- **Mnemonic** NOCONT
- **Description** The 'continue' statement shall not be used (see [MISRA-C:2004]: RULE 14.5).

Fallthrough shall be avoided

- **Mnemonic** NOFALLTHROUGH
- **Description** There shall be no fallthrough the next case in a switch statement.

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Label out a switch

- **Mnemonic** NOLABEL
- **Description** A switch label shall only be used when the most closely-enclosing compound statement is the body of a switch statement (see [MISRA-C:2004]: RULE 15.1).

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO

- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

Missing case in switch

- **Mnemonic** ONECASE
- **Description** Every switch statement shall have at least one case clause (see [MISRA-C:2004]: RULE 15.5).

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

Risky Empty Statement

- **Mnemonic** RISKYEMPTY
- **Description** Risky Empty Statement

Multiple break in loop are not allowed

- **Mnemonic** SGLBRK
- **Description** For any iteration statement there shall be at most one 'break' statement used for loop termination (see [MISRA-C:2004]: RULE 14.6).

MindC

MindC Metrics

Andthen Operators

- **Mnemonic** ANTH
- **Description** Number of 'andthen' operators

Assignment Operators

- **Mnemonic** ASOP
- **Description** Number of assignment operators used in the source file

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC
- **Description** Number of lines of code containing only a brace in the source file(s).

Break in Loop

- **Mnemonic** BRKL
- **Description** Number of 'break' statements in loop in the function

Break in Switch

- **Mnemonic** BRKS
- **Description** Number of 'break' statements in 'switch' in the function

Case Blocks

- **Mnemonic** CABL
- **Description** Number of 'case' blocks in 'switch' in the function

Calls To

- **Mnemonic** CAL2
- **Description** Number of explicit calls to the function.

Called Functions

- **Mnemonic** CALD
- **Description** Number of distinct functions defined in the project source file and called by the function.

Calls From

- **Mnemonic** CALF
- **Description** Number of explicit calls from the function.

Calling Functions

- **Mnemonic** CALI
- **Description** Number of distinct functions calling the function.

Called External Functions

- **Mnemonic** CALX
- **Description** Number of distinct external functions called by the function - external i.e. not defined in the project

Case Labels

- **Mnemonic** CASE
- **Description** Number of 'case' labels in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Recursive Calls

- **Mnemonic** CDRI
- **Description** Number of directly recursive calls in the function.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Called Depth

- **Mnemonic** CGDD
- **Description** Maximum depth of called functions.

Calling Depth

- **Mnemonic** CGDI
- **Description** Maximum depth of calling functions.

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Minimum Number of Indirect Cycles

- **Mnemonic** CIRI
- **Description** Minimum number of indirect call graph cycles in which the function is involved (excluding recursive calls).

Comment Lines

- **Mnemonic** CLOC

- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Comparison Operators

- **Mnemonic** CPOP
- **Description** Number of comparison operators used in the source file

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Default Statement

- **Mnemonic** DEFT
- **Description** Number of 'default' blocks in 'switch' in the function

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Do While Statements

- **Mnemonic** DOWH
- **Description** Number of 'do...while' statements in the function

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Goto Statements

- **Mnemonic** GOTO
- **Description** Number of 'goto' statements

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening brace.

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Use of longjump

- **Mnemonic** LONGJMP
- **Description** Use of longjump

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Memory Allocation

- **Mnemonic** MEMALLOC
- **Description** Memory Allocation

Memory Freeing

- **Mnemonic** MEMFREE
- **Description** Memory Freeing

Mixed Lines

- **Mnemonic** MLOC
- **Description** Number of lines containing both code and comment in the source files.

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Number of Parameters

- **Mnemonic** NOP
- **Description** Number of formal parameters in the function

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

Use of offsetof

- **Mnemonic** OFFSETOF
- **Description** Use of offsetof

Orelse operators

- **Mnemonic** OREL
- **Description** Number of 'orelse' operators

Number of #DEFINE

- **Mnemonic** P_DEFINE
- **Description** Number of #DEFINE

Number of #ELIF

- **Mnemonic** P_ELIF
- **Description** Number of #ELIF

Number of #ELSE

- **Mnemonic** P_ELSE
- **Description** Number of #ELSE

Number of #ENDIF

- **Mnemonic** P_ENDIF
- **Description** Number of #ENDIF

Number of #ERROR

- **Mnemonic** P_ERROR
- **Description** Number of #ERROR

Number of #IF

- **Mnemonic** P_IF
- **Description** Number of #IF

Number of #IFDEF

- **Mnemonic** P_IFDEF
- **Description** Number of #IFDEF

Number of #IFDEF

- **Mnemonic** P_IFNDEF
- **Description** Number of #IFNDEF

Number of Include

- **Mnemonic** P_INCLUDE
- **Description** Number of Include

Compiler FLAG Nested Level

- **Mnemonic** P_NEST
- **Description** Compiler FLAG Nested Level

Number of #PRAGMA

- **Mnemonic** P_PRAGMA
- **Description** Number of #PRAGMA

Number of #UNDEF

- **Mnemonic** P_UNDEF
- **Description** Number of #UNDEF

Number of #WARNING

- **Mnemonic** P_WARNING
- **Description** Number of #WARNING

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Use of setjump

- **Mnemonic** SETJMP
- **Description** Use of setjump

Signal Functions

- **Mnemonic** SIGNAL
- **Description** Use of signal Functions

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Special Operators

- **Mnemonic** SPOP
- **Description** Number of special operators used in the source file

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

IO Functions

- **Mnemonic** STDIO
- **Description** Use IO Functions

String Conversions

- **Mnemonic** STRINGCONV
- **Description** Use of String Conversions

Switch Statements

- **Mnemonic** SWIT
- **Description** Number of 'switch' statements in the function

System Functions

- **Mnemonic** SYSCOM

- **Description** Use of system Functions

Ternary operators

- **Mnemonic** TERN
- **Description** Number of ternary operators i.e. ?:

Time Handling

- **Mnemonic** TIMEHDL
- **Description** Use of Time Handling

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

MindC Ruleset

Missing Break

- **Mnemonic** BRKFINAL
- **Description** An unconditional break statement shall terminate every non-empty switch clause (see [MISRA-C:2004]: RULE 15.2).

Backward Goto shall not be used

- **Mnemonic** BWGOTO
- **Description** Backward gotos shall not be used.

Missing compound statement

- **Mnemonic** COMPOUND
- **Description** The statement forming the body of a switch, while, do ... while or for statement shall be a compound statement (see [MISRA-C:2004]: RULE 14.8).

Missing compound if

- **Mnemonic** COMPOUNDIF
- **Description** An if (expression) construct shall be followed by a compound statement. The else keyword shall be followed by either a compound statement, or another if statement (see [MISRA-C:2004]: RULE 14.9).

Commented-out Source Code is not allowed

- **Mnemonic** R_CSTAT
- **Description** Commented-out Source Code is not allowed

Missing Default

- **Mnemonic** DEFAULT
- **Description** The final clause of a switch statement shall be the default clause (see [MISRA-C:2004]: RULE 15.3).

Dynamic Memory Allocation shall not be used

- **Mnemonic** DYNMEMALLOC
- **Description** Dynamic heap memory allocation shall not be used. This precludes the use of the functions calloc, malloc, realloc and free (see [MISRA-C:2004]: RULE 20.4)

Missing final else

- **Mnemonic** ELSEFINAL
- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-C:2004]: RULE 14.10).

Macro longjmp or setjmp shall not be used

- **Mnemonic** JUMP
- **Description** (The setjmp macro and the longjmp function shall not be used (see [MISRA-C:2004]: RULE 20.7).

Nesting Level of Preprocessing directives is too high

- **Mnemonic** R_MAXPNEST
- **Description** Nesting Level of Preprocessing directives is too high

Assignment in Boolean

- **Mnemonic** NOASGCOND
- **Description** Assignment operators shall not be used in expressions that yield a boolean value

Assignment without Comparison

- **Mnemonic** NOASGINBOOL
- **Description** Assignment operators shall not be used in expressions that do not contain comparison operators.

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

There shall be a no code before first case

- **Mnemonic** NOCODEBEFORECASE
- **Description** There shall be a no code before the first case of a switch statement.

Continue shall not be used

- **Mnemonic** NOCONT
- **Description** The 'continue' statement shall not be used (see [MISRA-C:2004]: RULE 14.5).

Fallthrough shall be avoided

- **Mnemonic** NOFALLTHROUGH

- **Description** There shall be no fallthrough the next case in a switch statement.

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Goto shall not be used

- **Mnemonic** NOGOTO
- **Description** The 'goto' statement shall not be used (see [MISRA-C:2004]: RULE 14.4).

Label out a switch

- **Mnemonic** NOLABEL
- **Description** A switch label shall only be used when the most closely-enclosing compound statement is the body of a switch statement (see [MISRA-C:2004]: RULE 15.1).

Recursion are not allowed

- **Mnemonic** NORECURSION
- **Description** Functions shall not called themselves either directly or indirectly (see [MISRA-C:2004]: RULE 16.2).

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

Macro offsetof shall not be used

- **Mnemonic** OFFSETOF
- **Description** The macro offsetof, in library <stddef.h>, shall not be used (see [MISRA-C:2004]: RULE 20.6).

Missing case in switch

- **Mnemonic** ONECASE
- **Description** Every switch statement shall have at least one case clause (see [MISRA-C:2004]: RULE 15.5).

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

Risky Empty Statement

- **Mnemonic** RISKYEMPTY
- **Description** Risky Empty Statement

Multiple break in loop are not allowed

- **Mnemonic** SGLBRK
- **Description** For any iteration statement there shall be at most one 'break' statement used for loop termination (see [MISRA-C:2004]: RULE 14.6).

Signal or Raise shall not be used

- **Mnemonic** SIGNAL
- **Description** The signal handling facilities of <signal.h> shall not be used (see [MISRA-C:2004]: RULE 20.8).

IO Functions shall not be used

- **Mnemonic** STDIO
- **Description** The input/output library <stdio.h> shall not be used in production code (see [MISRA-C:2004]: RULE 20.9).

'atof, atoi or atol' shall not be used

- **Mnemonic** STRINGCONV
- **Description** The library functions atof, atoi and atol from library <stdlib.h> shall not be used (see [MISRA-C:2004]: RULE 20.10).

'abort, exit, getenv or system' shall not be used

- **Mnemonic** SYSCOM
- **Description** The library functions abort, exit, getenv and system from library <stdlib.h> shall not be used (see [MISRA-C:2004]: RULE 20.11).

Time Handling Functions shall not be used

- **Mnemonic** TIMEHDL
- **Description** The time handling functions of library <time.h> shall not be used: time, strftime, clock, difftime, mktime (see [MISRA-C:2004]: RULE 20.12).

Objective-C

Objective-C Metrics

Constant Data

- **Mnemonic** ACST
- **Description** Number of constant data

Number of Attributes

- **Mnemonic** ANBR
- **Description** Number of attributes

Number of data without accessibility

- **Mnemonic** ANON
- **Description** Number of data without accessibility

Andthen Operators

- **Mnemonic** ANTH
- **Description** Number of 'andthen' operators

Public Data

- **Mnemonic** APBL
- **Description** Number of public data

Protected Data

- **Mnemonic** APRT
- **Description** Number of protected data

Private data

- **Mnemonic** APRV
- **Description** Number of private data

Assignment Operators

- **Mnemonic** ASOP
- **Description** Number of assignment operators used in the source file

Static Data

- **Mnemonic** ASTA
- **Description** Number of static data

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC
- **Description** Number of lines of code containing only a brace in the source file(s).

Break in Loop

- **Mnemonic** BRKL
- **Description** Number of 'break' statements in loop in the function

Break in Switch

- **Mnemonic** BRKS
- **Description** Number of 'break' statements in 'switch' in the function

Case Blocks

- **Mnemonic** CABL
- **Description** Number of 'case' blocks in 'switch' in the function

Case Labels

- **Mnemonic** CASE
- **Description** Number of 'case' labels in the function

Catch Statements

- **Mnemonic** CATC
- **Description** Number of 'catch' statements in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Comparison Operators

- **Mnemonic** CPOP
- **Description** Number of comparison operators used in the source file

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Depth of Descendant Tree

- **Mnemonic** DDT
- **Description** Maximun depth of the inheritance tree from the class

Default Statement

- **Mnemonic** DEFT
- **Description** Number of 'default' blocks in 'switch' in the function

Depth of Inheritance Tree

- **Mnemonic** DIT
- **Description** Maximun depth of the class inheritance tree

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Do While Statements

- **Mnemonic** DOWH

- **Description** Number of 'do...while' statements in the function

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Goto Statements

- **Mnemonic** GOTO
- **Description** Number of 'goto' statements

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening brace.

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Multiple Inheritance Indicator

- **Mnemonic** MII
- **Description** Number of classes from which the class inherits directly

Mixed Lines

- **Mnemonic** MLOC
- **Description** Number of lines containing both code and comment in the source files.

Methods without Accessibility

- **Mnemonic** MNON
- **Description** Number of methods without any accessibility specifier

Public Methods

- **Mnemonic** MPBL
- **Description** Number of public methods

Protected Methods

- **Mnemonic** MPRT
- **Description** Number of protected methods

Private Methods

- **Mnemonic** MPRV
- **Description** Number of private methods

Static Methods

- **Mnemonic** MSTA
- **Description** Number of static methods

Number of Ancestors

- **Mnemonic** NAC
- **Description** Number of classes from which the class inherits directly or indirectly

Number of Descendants

- **Mnemonic** NDC
- **Description** Number of classes which inherit from the class directly or indirectly

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Number Of Children

- **Mnemonic** NOC
- **Description** Number of classes which inherit directly from the class

Number of Parameters

- **Mnemonic** NOP
- **Description** Number of formal parameters in the function

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

Or else operators

- **Mnemonic** OREL
- **Description** Number of 'or else' operators

Properties

- **Mnemonic** PNBR
- **Description** Total number of properties

Number of #DEFINE

- **Mnemonic** P_DEFINE
- **Description** Number of #DEFINE

Number of #ELIF

- **Mnemonic** P_ELIF
- **Description** Number of #ELIF

Number of #ELSE

- **Mnemonic** P_ELSE
- **Description** Number of #ELSE

Number of #ENDIF

- **Mnemonic** P_ENDIF
- **Description** Number of #ENDIF

Number of #ERROR

- **Mnemonic** P_ERROR
- **Description** Number of #ERROR

Number of #IF

- **Mnemonic** P_IF
- **Description** Number of #IF

Number of #IFDEF

- **Mnemonic** P_IFDEF
- **Description** Number of #IFDEF

Number of #IFDEF

- **Mnemonic** P_IFNDEF
- **Description** Number of #IFDEF

Number of Include

- **Mnemonic** P_INCLUDE
- **Description** Number of Include

Compiler FLAG Nested Level

- **Mnemonic** P_NEST
- **Description** Compiler FLAG Nested Level

Number of #PRAGMA

- **Mnemonic** P_PRAGMA
- **Description** Number of #PRAGMA

Number of #UNDEF

- **Mnemonic** P_UNDEF
- **Description** Number of #UNDEF

Number of #WARNING

- **Mnemonic** P_WARNING
- **Description** Number of #WARNING

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Special Operators

- **Mnemonic** SPOP
- **Description** Number of special operators used in the source file

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

Switch Statements

- **Mnemonic** SWIT
- **Description** Number of 'switch' statements in the function

Ternary operators

- **Mnemonic** TERN
- **Description** Number of ternary operators i.e. ?:

Throw Statements

- **Mnemonic** THRO
- **Description** Number of 'throw' statements in the function

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Try Statements

- **Mnemonic** TRY
- **Description** Number of 'try' statements in the function

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

Weighted Method per Class

- **Mnemonic** XWMC
- **Description** Sum of cyclomatic complexities of methods implemented outside the class definition

Objective-C Ruleset

Missing Break

- **Mnemonic** BRKFINAL
- **Description** An unconditional break statement shall terminate every non-empty switch clause (see [MISRA-C:2004]: RULE 15.2).

Backward Goto shall not be used

- **Mnemonic** BWGOTO
- **Description** Backward gotos shall not be used.

Missing compound statement

- **Mnemonic** COMPOUND
- **Description** The statement forming the body of a switch, while, do ... while or for statement shall be a compound statement (see [MISRA-C:2004]: RULE 14.8).

Missing compound if

- **Mnemonic** COMPOUNDIF
- **Description** An if (expression) construct shall be followed by a compound statement. The else keyword shall be followed by either a compound statement, or another if statement (see [MISRA-C:2004]: RULE 14.9).

Commented-out Source Code is not allowed

- **Mnemonic** R_CSTAT
- **Description** Commented-out Source Code is not allowed

Missing Default

- **Mnemonic** DEFAULT
- **Description** The final clause of a switch statement shall be the default clause (see [MISRA-C:2004]: RULE 15.3).

Missing final else

- **Mnemonic** ELSEFINAL

- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-C:2004]: RULE 14.10).

Assignment in Boolean

- **Mnemonic** NOASGCOND
- **Description** Assignment operators shall not be used in expressions that yield a boolean value

Assignment without Comparison

- **Mnemonic** NOASGINBOOL
- **Description** Assignment operators shall not be used in expressions that do not contain comparison operators.

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

There shall be a no code before first case

- **Mnemonic** NOCODEBEFORECASE

- **Description** There shall be a no code before the first case of a switch statement.

Continue shall not be used

- **Mnemonic** NOCONT
- **Description** The 'continue' statement shall not be used (see [MISRA-C:2004]: RULE 14.5).

Fallthrough shall be avoided

- **Mnemonic** NOFALLTHROUGH
- **Description** There shall be no fallthrough the next case in a switch statement.

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Goto shall not be used

- **Mnemonic** NOGOTO
- **Description** The 'goto' statement shall not be used (see [MISRA-C:2004]: RULE 14.4).

Label out a switch

- **Mnemonic** NOLABEL
- **Description** A switch label shall only be used when the most closely-enclosing compound statement is the body of a switch statement (see [MISRA-C:2004]: RULE 15.1).

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

Missing case in switch

- **Mnemonic** ONECASE
- **Description** Every switch statement shall have at least one case clause (see [MISRA-C:2004]: RULE 15.5).

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

Risky Empty Statement

- **Mnemonic** RISKYEMPTY
- **Description** Risky Empty Statement

Multiple break in loop are not allowed

- **Mnemonic** SGLBRK
- **Description** For any iteration statement there shall be at most one 'break' statement used for loop termination (see [MISRA-C:2004]: RULE 14.6).

PHP

PHP Metrics

Constant Data

- **Mnemonic** ACST
- **Description** Number of constant data

Number of Attributes

- **Mnemonic** ANBR
- **Description** Number of attributes

Number of data without accessibility

- **Mnemonic** ANON
- **Description** Number of data without accessibility

Andthen Operators

- **Mnemonic** ANTH
- **Description** Number of 'andthen' operators

Public Data

- **Mnemonic** APBL
- **Description** Number of public data

Protected Data

- **Mnemonic** APRT
- **Description** Number of protected data

Private data

- **Mnemonic** APRV
- **Description** Number of private data

Static Data

- **Mnemonic** ASTA

- **Description** Number of static data

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC
- **Description** Number of lines of code containing only a brace in the source file(s).

Case Labels

- **Mnemonic** CASE
- **Description** Number of 'case' labels in the function

Catch Statements

- **Mnemonic** CATC
- **Description** Number of 'catch' statements in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Depth of Descendant Tree

- **Mnemonic** DDT
- **Description** Maximum depth of the inheritance tree from the class

Default Statement

- **Mnemonic** DEFT
- **Description** Number of 'default' blocks in 'switch' in the function

Depth of Inheritance Tree

- **Mnemonic** DIT
- **Description** Maximum depth of the class inheritance tree

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Do While Statements

- **Mnemonic** DOWH
- **Description** Number of 'do...while' statements in the function

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

Call to exit

- **Mnemonic** EXIT
- **Description** Number of calls to the exit function

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

Foreach Statements

- **Mnemonic** FORE
- **Description** Number of 'foreach' statements in the function

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Goto Statements

- **Mnemonic** GOTO
- **Description** Number of 'goto' statements

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening

brace.

HTML Lines of Code

- **Mnemonic** HTML
- **Description** Number of HTML lines of code in the source file(s).

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Constant Methods

- **Mnemonic** MCST
- **Description** Number of 'constant' methods i.e. which do not modify the object

Multiple Inheritance Indicator

- **Mnemonic** MII
- **Description** Number of classes from which the class inherits directly

PHP/HTML Mixed Lines

- **Mnemonic** MIXL
- **Description** Number of lines containing both PHP and HTML in the source files.

Mixed Lines

- **Mnemonic** MLOC
- **Description** Number of lines containing both code and comment in the source files.

Methods without Accessibility

- **Mnemonic** MNON
- **Description** Number of methods without any accessibility specifier

Public Methods

- **Mnemonic** MPBL
- **Description** Number of public methods

Protected Methods

- **Mnemonic** MPRT
- **Description** Number of protected methods

Private Methods

- **Mnemonic** MPRV
- **Description** Number of private methods

Static Methods

- **Mnemonic** MSTA
- **Description** Number of static methods

Number of Ancestors

- **Mnemonic** NAC
- **Description** Number of classes from which the class inherits directly or indirectly

Number of Descendants

- **Mnemonic** NDC
- **Description** Number of classes which inherit from the class directly or indirectly

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Number Of Children

- **Mnemonic** NOC
- **Description** Number of classes which inherit directly from the class

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

Orelse operators

- **Mnemonic** OREL
- **Description** Number of 'orelse' operators

PHP Lines of Code

- **Mnemonic** PHPL
- **Description** Number of PHP lines of code in the source file(s).

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

Switch Statements

- **Mnemonic** SWIT
- **Description** Number of 'switch' statements in the function

Ternary operators

- **Mnemonic** TERN
- **Description** Number of ternary operators i.e. ?:

Throw Statements

- **Mnemonic** THRO
- **Description** Number of 'throw' statements in the function

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Try Statements

- **Mnemonic** TRY

- **Description** Number of 'try' statements in the function

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

PHP Ruleset

Missing Break

- **Mnemonic** BRKFINAL
- **Description** An unconditional break statement shall terminate every non-empty switch clause (see [MISRA-C:2004]: RULE 15.2).

Backward Goto shall not be used

- **Mnemonic** BWGOTO
- **Description** Backward gotos shall not be used.

Missing compound statement

- **Mnemonic** COMPOUND
- **Description** The statement forming the body of a switch, while, do ... while or for statement shall be a compound statement (see [MISRA-C:2004]: RULE 14.8).

Missing compound if

- **Mnemonic** COMPOUNDIF
- **Description** An if (expression) construct shall be followed by a compound statement. The else keyword shall be followed by either a compound statement, or another if statement (see [MISRA-C:2004]: RULE 14.9).

Commented-out Source Code is not allowed

- **Mnemonic** R_CSTAT
- **Description** Commented-out Source Code is not allowed

Missing Default

- **Mnemonic** DEFAULT

- **Description** The final clause of a switch statement shall be the default clause (see [MISRA-C:2004]: RULE 15.3).

Missing final else

- **Mnemonic** ELSEFINAL
- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-C:2004]: RULE 14.10).

Assignment in Boolean

- **Mnemonic** NOASGCOND
- **Description** Assignment operators shall not be used in expressions that yield a boolean value

Assignment without Comparison

- **Mnemonic** NOASGINBOOL
- **Description** Assignment operators shall not be used in expressions that do not contain comparison operators.

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN

- **Description** There shall be no algorithmic cloning

There shall be a no code before first case

- **Mnemonic** NOCODEBEFORECASE
- **Description** There shall be a no code before the first case of a switch statement.

Continue shall not be used

- **Mnemonic** NOCONT
- **Description** The 'continue' statement shall not be used (see [MISRA-C:2004]: RULE 14.5).

Fallthrough shall be avoided

- **Mnemonic** NOFALLTHROUGH
- **Description** There shall be no fallthrough the next case in a switch statement.

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Goto shall not be used

- **Mnemonic** NOGOTO
- **Description** The 'goto' statement shall not be used (see [MISRA-C:2004]: RULE 14.4).

Label out a switch

- **Mnemonic** NOLABEL
- **Description** A switch label shall only be used when the most closely-enclosing compound statement is the body of a switch statement (see [MISRA-C:2004]: RULE 15.1).

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

Missing case in switch

- **Mnemonic** ONECASE
- **Description** Every switch statement shall have at least one case clause (see [MISRA-C:2004]: RULE 15.5).

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

Risky Empty Statement

- **Mnemonic** RISKYEMPTY
- **Description** Risky Empty Statement

Multiple break in loop are not allowed

- **Mnemonic** SGLBRK
- **Description** For any iteration statement there shall be at most one 'break' statement used for loop termination (see [MISRA-C:2004]: RULE 14.6).

Python

Python Metrics

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC
- **Description** Number of lines of code containing only a brace in the source file(s).

Break in Loop

- **Mnemonic** BRKL
- **Description** Number of 'break' statements in loop in the function

Catch Statements

- **Mnemonic** CATC
- **Description** Number of 'catch' statements in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Depth of Descendant Tree

- **Mnemonic** DDT

- **Description** Maximun depth of the inheritance tree from the class

Depth of Inheritance Tree

- **Mnemonic** DIT
- **Description** Maximun depth of the class inheritance tree

Number of DocString lines

- **Mnemonic** DOCL
- **Description** Count number of lines of python DocString

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

Call to exit

- **Mnemonic** EXIT
- **Description** Number of calls to the exit function

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening brace.

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Multiple Inheritance Indicator

- **Mnemonic** MII
- **Description** Number of classes from which the class inherits directly

Mixed Lines

- **Mnemonic** MLOC
- **Description** Number of lines containing both code and comment in the source files.

Number of Ancestors

- **Mnemonic** NAC
- **Description** Number of classes from which the class inherits directly or indirectly

Number of Descendants

- **Mnemonic** NDC
- **Description** Number of classes which inherit from the class directly or indirectly

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Number Of Children

- **Mnemonic** NOC
- **Description** Number of classes which inherit directly from the class

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

% of parsed tokens

- **Mnemonic** PARSE
- **Description** Percent of parsed tokens

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

Throw Statements

- **Mnemonic** THRO
- **Description** Number of 'throw' statements in the function

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD

- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Try Statements

- **Mnemonic** TRY
- **Description** Number of 'try' statements in the function

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

Python Ruleset

There shall be a *init* method in the class.

- **Mnemonic** CLASSNOINIT
- **Description** There shall be a *init* method in the class.

Missing compound statement

- **Mnemonic** COMPOUND
- **Description** The statement forming the body of a switch, while, do ... while or for statement shall be a compound statement (see [MISRA-C:2004]: RULE 14.8).

Missing compound if

- **Mnemonic** COMPOUNDIF
- **Description** An if (expression) construct shall be followed by a compound statement. The else keyword shall be followed by either a compound statement, or another if statement (see [MISRA-C:2004]: RULE 14.9).

Missing final else

- **Mnemonic** ELSEFINAL

- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-C:2004]: RULE 14.10).

Method should have "self" as first argument

- **Mnemonic** METHODSELFFIRST
- **Description** Method has an attribute different the "self" as first argument.

Method without parameter

- **Mnemonic** METHODWITHOUTPARAM
- **Description** Method without parameter.

Assignment in Boolean

- **Mnemonic** NOASGCOND
- **Description** Assignment operators shall not be used in expressions that yield a boolean value

Assignment without Comparison

- **Mnemonic** NOASGINBOOL
- **Description** Assignment operators shall not be used in expressions that do not contain comparison operators.

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN

- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

Continue shall not be used

- **Mnemonic** NOCONT
- **Description** The 'continue' statement shall not be used (see [MISRA-C:2004]: RULE 14.5).

Exec shall not be used.

- **Mnemonic** NOEXEC
- **Description** Use of 'exec'

EXIT PROGRAM shall not be used

- **Mnemonic** NOEXIT
- **Description** EXIT PROGRAM shall not be used in a subprogram. Use GOBACK instead

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Label out a switch

- **Mnemonic** NOLABEL
- **Description** A switch label shall only be used when the most closely-enclosing compound statement is the body of a switch statement (see [MISRA-C:2004]: RULE 15.1).

Print shall not be used.

- **Mnemonic** NOPRINT
- **Description** Use of 'print'

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

'star' parameter shall not be used.

- **Mnemonic** NOSTARPARAM
- **Description** Use of star parameter

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

There shall be only one Statement per line

- **Mnemonic** ONESTMTPERLINE

- **Description** There shall be only one Statement per line

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

Risky Empty Statement

- **Mnemonic** RISKYEMPTY
- **Description** Risky Empty Statement

Multiple break in loop are not allowed

- **Mnemonic** SGLBRK
- **Description** For any iteration statement there shall be at most one 'break' statement used for loop termination (see [MISRA-C:2004]: RULE 14.6).

PL/SQL

PL/SQL Metrics

Andthen Operators

- **Mnemonic** ANTH
- **Description** Number of 'andthen' operators

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC

- **Description** Number of lines of code containing only a brace in the source file(s).

Break in Loop

- **Mnemonic** BRKL
- **Description** Number of 'break' statements in loop in the function

Case Blocks

- **Mnemonic** CABL
- **Description** Number of 'case' blocks in 'switch' in the function

Case Labels

- **Mnemonic** CASE
- **Description** Number of 'case' labels in the function

Catch Statements

- **Mnemonic** CATC
- **Description** Number of 'catch' statements in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Default Statement

- **Mnemonic** DEFT
- **Description** Number of 'default' blocks in 'switch' in the function

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Goto Statements

- **Mnemonic** GOTO
- **Description** Number of 'goto' statements

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening brace.

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Mixed Lines

- **Mnemonic** MLOC
- **Description** Number of lines containing both code and comment in the source files.

Maximum Nested Structures

- **Mnemonic** NEST

- **Description** Maximum number of nested structures

Number of Parameters

- **Mnemonic** NOP
- **Description** Number of formal parameters in the function

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

Orelse operators

- **Mnemonic** OREL
- **Description** Number of 'orelse' operators

Number of #DEFINE

- **Mnemonic** P_DEFINE
- **Description** Number of #DEFINE

Number of #ELIF

- **Mnemonic** P_ELIF
- **Description** Number of #ELIF

Number of #ELSE

- **Mnemonic** P_ELSE
- **Description** Number of #ELSE

Number of #ENDIF

- **Mnemonic** P_ENDIF
- **Description** Number of #ENDIF

Number of #ERROR

- **Mnemonic** P_ERROR
- **Description** Number of #ERROR

Number of #IF

- **Mnemonic** P_IF
- **Description** Number of #IF

Number of #IFDEF

- **Mnemonic** P_IFDEF
- **Description** Number of #IFDEF

Number of #IFNDEF

- **Mnemonic** P_IFNDEF
- **Description** Number of #IFNDEF

Number of Include

- **Mnemonic** P_INCLUDE
- **Description** Number of Include

Compiler FLAG Nested Level

- **Mnemonic** P_NEST
- **Description** Compiler FLAG Nested Level

Number of #PRAGMA

- **Mnemonic** P_PRAGMA
- **Description** Number of #PRAGMA

Number of #UNDEF

- **Mnemonic** P_UNDEF
- **Description** Number of #UNDEF

Number of #WARNING

- **Mnemonic** P_WARNING
- **Description** Number of #WARNING

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

Switch Statements

- **Mnemonic** SWIT
- **Description** Number of 'switch' statements in the function

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

PL/SQL Ruleset

Backward Goto shall not be used

- **Mnemonic** BWGOTO
- **Description** Backward gotos shall not be used.

Commented-out Source Code is not allowed

- **Mnemonic** R_CSTAT
- **Description** Commented-out Source Code is not allowed

Missing Default

- **Mnemonic** DEFAULT
- **Description** The final clause of a switch statement shall be the default clause (see [MISRA-C:2004]: RULE 15.3).

Missing final else

- **Mnemonic** ELSEFINAL
- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-

C:2004]: RULE 14.10).

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

Commit Used

- **Mnemonic** NOCOMMIT
- **Description** Commit instruction used in code

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Goto shall not be used

- **Mnemonic** NOGOTO
- **Description** The 'goto' statement shall not be used (see [MISRA-C:2004]: RULE 14.4).

Rollback Used

- **Mnemonic** R_NOROLLBACK
- **Description** Rollback instruction used in code

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

Missing case in switch

- **Mnemonic** ONECASE
- **Description** Every switch statement shall have at least one case clause (see [MISRA-C:2004]: RULE 15.5).

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

TSQL

TSQL Metrics

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC
- **Description** Number of lines of code containing only a brace in the source file(s).

Break in Loop

- **Mnemonic** BRKL
- **Description** Number of 'break' statements in loop in the function

Catch Statements

- **Mnemonic** CATC
- **Description** Number of 'catch' statements in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Delete Statements

- **Mnemonic** DELETE
- **Description** Number of Delete statements

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Goto Statements

- **Mnemonic** GOTO

- **Description** Number of 'goto' statements

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening brace.

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Insert Statements

- **Mnemonic** INSERT
- **Description** Number of Insert statements

Label Statements

- **Mnemonic** LABEL
- **Description** Number of Label statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Mixed Lines

- **Mnemonic** MLOC
- **Description** Number of lines containing both code and comment in the source files.

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Select Statements

- **Mnemonic** SELECT
- **Description** Number of Select statements

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

Throw Statements

- **Mnemonic** THRO
- **Description** Number of 'throw' statements in the function

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Try Statements

- **Mnemonic** TRY
- **Description** Number of 'try' statements in the function

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

Update Statements

- **Mnemonic** UPDATE
- **Description** Number of Update statements

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

TSQL Ruleset

Backward Goto shall not be used

- **Mnemonic** BWGOTO
- **Description** Backward gotos shall not be used.

Commented-out Source Code is not allowed

- **Mnemonic** R_CSTAT
- **Description** Commented-out Source Code is not allowed

Missing final else

- **Mnemonic** ELSEFINAL
- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-C:2004]: RULE 14.10).

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

Continue shall not be used

- **Mnemonic** NOCONT
- **Description** The 'continue' statement shall not be used (see [MISRA-C:2004]: RULE 14.5).

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Goto shall not be used

- **Mnemonic** NOGOTO
- **Description** The 'goto' statement shall not be used (see [MISRA-C:2004]: RULE 14.4).

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

Multiple break in loop are not allowed

- **Mnemonic** SGLBRK
- **Description** For any iteration statement there shall be at most one 'break' statement used for loop termination (see [MISRA-C:2004]: RULE 14.6).

VB.net

VB.net Metrics

Constant Data

- **Mnemonic** ACST
- **Description** Number of constant data

Fiend Attributes

- **Mnemonic** AFRI
- **Description** Number of Friend Attributes

Number of Attributes

- **Mnemonic** ANBR
- **Description** Number of attributes

Andthen Operators

- **Mnemonic** ANTH
- **Description** Number of 'andthen' operators

Public Data

- **Mnemonic** APBL
- **Description** Number of public data

Protected Data

- **Mnemonic** APRT
- **Description** Number of protected data

Private data

- **Mnemonic** APRV
- **Description** Number of private data

Shadowed Attributes

- **Mnemonic** ASHD
- **Description** Number of Shadowed Attributes

Shared Attributes

- **Mnemonic** ASHR
- **Description** Number of Shared Attributes

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Header Blocks Of Comment

- **Mnemonic** BHCO
- **Description** Number block of comment placed before the beginning of the artefact.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Brace Lines

- **Mnemonic** BRAC
- **Description** Number of lines of code containing only a brace in the source file(s).

Break in Loop

- **Mnemonic** BRKL
- **Description** Number of 'break' statements in loop in the function

Stop Statements

- **Mnemonic** BRKP
- **Description** Number of Stop Statements (Breakpoints)

Break in Switch

- **Mnemonic** BRKS
- **Description** Number of 'break' statements in 'switch' in the function

Case Blocks

- **Mnemonic** CABL
- **Description** Number of 'case' blocks in 'switch' in the function

Case Labels

- **Mnemonic** CASE
- **Description** Number of 'case' labels in the function

Catch Statements

- **Mnemonic** CATC
- **Description** Number of 'catch' statements in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including

recursivity).

Depth of Descendant Tree

- **Mnemonic** DDT
- **Description** Maximun depth of the inheritance tree from the class

Default Statement

- **Mnemonic** DEFT
- **Description** Number of 'default' blocks in 'switch' in the function

Depth of Inheritance Tree

- **Mnemonic** DIT
- **Description** Maximun depth of the class inheritance tree

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Do While Statements

- **Mnemonic** DOWH
- **Description** Number of 'do...while' statements in the function

Friend Events

- **Mnemonic** EFRI
- **Description** Number of Friend Events

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

Events

- **Mnemonic** ENBR
- **Description** Number of Events

Public Events

- **Mnemonic** EPBL
- **Description** Number of Public Events

Protected Events

- **Mnemonic** EPRT
- **Description** Number of Protected Events

Private Events

- **Mnemonic** EPRV
- **Description** Number of Private Events

Shadowed Events

- **Mnemonic** ESHD
- **Description** Number of Shadowed Events

Shared Events

- **Mnemonic** ESHR
- **Description** Number of Shared Events

Call to exit

- **Mnemonic** EXIT
- **Description** Number of calls to the exit function

Comments containing FIXME

- **Mnemonic**
- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Goto Statements

- **Mnemonic** GOTO
- **Description** Number of 'goto' statements

Header Lines Of Comment

- **Mnemonic** HCOM
- **Description** Number of comment lines placed before the beginning of the artefact.

Header Lines Of Code

- **Mnemonic** HLOC
- **Description** Number of lines between the function or class definition and the first opening brace.

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

End Statements

- **Mnemonic** KILL
- **Description** Number of End Statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Declare Members

- **Mnemonic** MDEC
- **Description** Number of Declare Members

Delegate Members

- **Mnemonic** MDEL
- **Description** Number of Delegate Members
 - Friend Members*
- **Mnemonic** MFRI
- **Description** Number of Friend Members

Multiple Inheritance Indicator

- **Mnemonic** MII
- **Description** Number of classes from which the class inherits directly

Mixed Lines

- **Mnemonic** MLOC
- **Description** Number of lines containing both code and comment in the source files.

Must Members

- **Mnemonic** MMST
- **Description** Number of Must Members

Methods without Accessibility

- **Mnemonic** MNON
- **Description** Number of methods without any accessibility specifier

Partial Members

- **Mnemonic** MPAR
- **Description** Number of Partial Members

Public Methods

- **Mnemonic** MPBL
- **Description** Number of public methods

Protected Methods

- **Mnemonic** MPRT
- **Description** Number of protected methods

Private Methods

- **Mnemonic** MPRV
- **Description** Number of private methods

Shadowed Members

- **Mnemonic** MSHD
- **Description** Number of Shadowed Members

Shared Members

- **Mnemonic** MSHR
- **Description** Number of Shared Members

Number of Ancestors

- **Mnemonic** NAC
- **Description** Number of classes from which the class inherits directly or indirectly

Number of Descendants

- **Mnemonic** NDC
- **Description** Number of classes which inherit from the class directly or indirectly

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Number Of Children

- **Mnemonic** NOC
- **Description** Number of classes which inherit directly from the class

Number of Methods

- **Mnemonic** NOM
- **Description** Number of methods defined in the class

Number of Parameters

- **Mnemonic** NOP
- **Description** Number of formal parameters in the function

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

Or else operators

- **Mnemonic** OREL
- **Description** Number of 'or else' operators

% of parsed tokens

- **Mnemonic** PARSE
- **Description** Percent of parsed tokens

Friend Properties

- **Mnemonic** PFRI
- **Description** Number of Friend Properties

Must Properties

- **Mnemonic** PMST
- **Description** Number of Must Properties

Properties

- **Mnemonic** PNBR
- **Description** Total number of properties

Public Properties

- **Mnemonic** PPBL
- **Description** Number of public properties

Protected Properties

- **Mnemonic** PPRT
- **Description** Number of protected properties

Private Properties

- **Mnemonic** PPRV
- **Description** Number of private properties

Shadowed Properties

- **Mnemonic** PSHD
- **Description** Number of Shadowed Properties

Shared Properties

- **Mnemonic** PSHR
- **Description** Number of Shared Properties

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Skipped Lines of Comment code

- **Mnemonic** SKLC
- **Description** Skipped Lines of Comment code i.e. lines that match a user defined regular expression to skip lines of comments.

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

Switch Statements

- **Mnemonic** SWIT
- **Description** Number of 'switch' statements in the function

Ternary operators

- **Mnemonic** TERN
- **Description** Number of ternary operators i.e. ?:

Throw Statements

- **Mnemonic** THRO
- **Description** Number of 'throw' statements in the function

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Try Statements

- **Mnemonic** TRY
- **Description** Number of 'try' statements in the function

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

VB.net Ruleset

Backward Goto shall not be used

- **Mnemonic** BWGOTO
- **Description** Backward gotos shall not be used.

Missing Case Else clause

- **Mnemonic** CASEELSE
- **Description** The final clause of a Select statement shall be the Case Else clause.

Missing final else

- **Mnemonic** ELSEFINAL
- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-C:2004]: RULE 14.10).

Use of Exit Do statement

- **Mnemonic** EXITDO
- **Description** Do not use Exit Do statement to break a Do loop.

Use of Exit Function statement

- **Mnemonic** EXITFCT
- **Description** Do not use Exit Function statement, use Return instead.

Use of Exit For statement

- **Mnemonic** EXITFOR
- **Description** Do not use Exit For statement to break a For loop.

Use of Exit Property statement

- **Mnemonic** EXITPROP
- **Description** Do not use Exit Property statement, use Return instead.

Use of Exit Select statement

- **Mnemonic** EXITSELECT
- **Description** Do not use Exit Select statement to exit a Select statement.

Use of Exit Sub statement

- **Mnemonic** EXITSUB
- **Description** Do not use Exit Sub statement.

Use of Exit Try statement

- **Mnemonic** EXITTRY
- **Description** Do not use Exit Try statement to exit a Try statement.

Use of Exit While statement

- **Mnemonic** EXITWHILE
- **Description** Do not use Exit While statement to break a While loop.

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

Continue shall not be used

- **Mnemonic** NOCONT
- **Description** The 'continue' statement shall not be used (see [MISRA-C:2004]: RULE 14.5).

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Goto shall not be used

- **Mnemonic** NOGOTO
- **Description** The 'goto' statement shall not be used (see [MISRA-C:2004]: RULE 14.4).

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

No case in Select

- **Mnemonic** ONECASE
- **Description** Every Select statement shall have at least one case clause.

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

Multiple Exit Do statement

- **Mnemonic** SGLEXITDO
- **Description** For any iteration statement there shall be at most one Exit statement used for loop termination.

Multiple Exit (Function, Sub or Property) statement

- **Mnemonic** SGLEXITFCT
- **Description** A Function, Sub or Property must have only one Exit statement.

Multiple Exit For statement

- **Mnemonic** SGLEXITFOR
- **Description** For any iteration statement there shall be at most one Exit statement used for loop termination.

Multiple Exit While statement

- **Mnemonic** SGLEXITWHILE
- **Description** For any iteration statement there shall be at most one Exit statement used for loop termination.

Xaml

Xaml Metrics

Andthen Operators

- **Mnemonic** ANTH
- **Description** Number of 'andthen' operators

Number of attributes

- **Mnemonic** ATTR
- **Description** Number of attributes.

Number of comment blocks

- **Mnemonic** BCOM
- **Description** Number of comment blocks.

Blank Lines

- **Mnemonic** BLAN
- **Description** Number of blank lines of code in the source file(s).

Break in Loop

- **Mnemonic** BRKL
- **Description** Number of 'break' statements in loop in the function

Break in Switch

- **Mnemonic** BRKS
- **Description** Number of 'break' statements in 'switch' in the function

Case Blocks

- **Mnemonic** CABL
- **Description** Number of 'case' blocks in 'switch' in the function

Case Labels

- **Mnemonic** CASE
- **Description** Number of 'case' labels in the function

Catch Statements

- **Mnemonic** CATC
- **Description** Number of 'catch' statements in the function

Cloned Code

- **Mnemonic** CC
- **Description** Duplicated code of this artefact

Code Cloning Line Counting

- **Mnemonic** CCLC
- **Description** Number of lines in source code used when searching for code duplication

Cyclomatic Complexity

- **Mnemonic** CCN
- **Description** Number of linearly independent paths in the function control graph.

Control Flow Token

- **Mnemonic** CFT
- **Description** Number of tokens in the control flow of functions

Cloned Control Flow Tokens

- **Mnemonic** CFTC
- **Description** Number of duplicated tokens in control flow of functions

Call Graph Depth

- **Mnemonic** CGDM
- **Description** Maximum depth of the call graph.

Comment Lines

- **Mnemonic** CLOC
- **Description** Number of lines of comments in the source file(s).

Clones Number

- **Mnemonic** CN
- **Description** Number of clones of this artefacts

Continue Statements

- **Mnemonic** CONT
- **Description** Number of 'continue' statements in the function

Commented Statements

- **Mnemonic** CSTAT
- **Description** Number of Commented Statements.

Minimum Number of Cycles

- **Mnemonic** CYCL
- **Description** Minimum number of call graph cycles in which the function is involved (including recursivity).

Default Statement

- **Mnemonic** DEFT
- **Description** Number of 'default' blocks in 'switch' in the function

Distinct Operands

- **Mnemonic** DOPD
- **Description** Number of distinct operands: variables and constants ([Halstead,76]: n2)

Distinct Operators

- **Mnemonic** DOPT
- **Description** Number of distinct operators: language keywords ([Halstead,76]: n1)

Do While Statements

- **Mnemonic** DOWH
- **Description** Number of 'do...while' statements in the function

Else Statements

- **Mnemonic** ELSE
- **Description** Number of 'else' statements

Number of XML elements

- **Mnemonic** ELT
- **Description** Number of XML elements.

Comments containing FIXME

- **Mnemonic**

- **Description** Number of Comments containing FIXME string.

For Statements

- **Mnemonic** FOR
- **Description** Number of 'for' statements in the function

Structures Added

- **Mnemonic** SADD
- **Description** Number of control structures added since the previous version.

Structures Modified

- **Mnemonic** SMOD
- **Description** Number of control structures modified since the previous version.

Structures Removed

- **Mnemonic** SREM
- **Description** Number of control structures removed since the previous version.

Goto Statements

- **Mnemonic** GOTO
- **Description** Number of 'goto' statements

Cloned Code

- **Mnemonic** ICC
- **Description** Duplicated code in this artefact

Cloned Control Flow Tokens

- **Mnemonic** ICFTC
- **Description** Number of duplicated tokens in control flow of functions

If Statements

- **Mnemonic** IF
- **Description** Number of 'if' statements

Line Count

- **Mnemonic** LC
- **Description** Number of lines.

Loop Statements

- **Mnemonic** LOOP
- **Description** Number of loop statements in the function

Maximum Nested Structures

- **Mnemonic** NEST
- **Description** Maximum number of nested structures

Number of Parameters

- **Mnemonic** NOP
- **Description** Number of formal parameters in the function

Non-Cyclic Paths

- **Mnemonic** PATH
- **Description** Number of non-cyclic paths in the function.

Orelse operators

- **Mnemonic** OREL
- **Description** Number of 'orelse' operators

Return Statements

- **Mnemonic** RETURN
- **Description** Number of 'return' statements in the function

Repeated Code Blocks

- **Mnemonic** RS
- **Description** Duplicated blocks in the function

Source Lines Of Code

- **Mnemonic** SLOC
- **Description** Number of lines of source code in the source file(s).

Executable Statements

- **Mnemonic** STAT
- **Description** Total number of executable statements.

Switch Statements

- **Mnemonic** SWIT
- **Description** Number of 'switch' statements in the function

Ternary operators

- **Mnemonic** TERN
- **Description** Number of ternary operators i.e. ?:

Number of text blocks

- **Mnemonic** TEXT
- **Description** Number of text blocks.

Throw Statements

- **Mnemonic** THRO
- **Description** Number of 'throw' statements in the function

Comments containing TODO

- **Mnemonic**
- **Description** Number of Comments containing TODO string.

Operand Occurrences

- **Mnemonic** TOPD
- **Description** Number of occurrences of operands: variables and constants ([Halstead,76]: N2)

Operator Occurrences

- **Mnemonic** TOPT
- **Description** Number of occurrences of operators: language keywords ([Halstead,76]: N1)

Try Statements

- **Mnemonic** TRY
- **Description** Number of 'try' statements in the function

Lines Added

- **Mnemonic** LADD
- **Description** Number of lines added since the previous version.

Lines Modified

- **Mnemonic** LMOD
- **Description** Number of lines modified since the previous version.

Lines Removed

- **Mnemonic** LREM
- **Description** Number of lines removed since the previous version.

While Statements

- **Mnemonic** WHIL
- **Description** Number of 'while' statements in the function

Xaml Ruleset

Missing Break

- **Mnemonic** BRKFINAL
- **Description** An unconditional break statement shall terminate every non-empty switch clause (see [MISRA-C:2004]: RULE 15.2).

Backward Goto shall not be used

- **Mnemonic** BWGOTO
- **Description** Backward gotos shall not be used.

Comment Before Paragraph

- **Mnemonic** COMMENT
- **Description** A comment shall introduce a section or a paragraph.

Missing compound statement

- **Mnemonic** COMPOUND
- **Description** The statement forming the body of a switch, while, do ... while or for statement shall be a compound statement (see [MISRA-C:2004]: RULE 14.8).

Missing compound if

- **Mnemonic** COMPOUNDIF
- **Description** An if (expression) construct shall be followed by a compound statement. The else keyword shall be followed by either a compound statement, or another if statement (see [MISRA-C:2004]: RULE 14.9).

Commented-out Source Code is not allowed

- **Mnemonic** R_CSTAT
- **Description** Commented-out Source Code is not allowed

Missing Default

- **Mnemonic** DEFAULT
- **Description** The final clause of a switch statement shall be the default clause (see [MISRA-C:2004]: RULE 15.3).

Missing final else

- **Mnemonic** ELSEFINAL
- **Description** All if ... else if constructs shall be terminated with an else clause (see [MISRA-C:2004]: RULE 14.10).

No Resources

- **Mnemonic** FORBIDDEN_ELEMENT
- **Description** Elements 'ResourceDictionary' are forbidden.

Resources Folder

- **Mnemonic** IN_FOLDER
- **Description** ResourceDictionary shall be in a 'Resources' directory

Assignment in Boolean

- **Mnemonic** NOASGCOND
- **Description** Assignment operators shall not be used in expressions that yield a boolean value

Assignment without Comparison

- **Mnemonic** NOASGINBOOL
- **Description** Assignment operators shall not be used in expressions that do not contain comparison operators.

Factorizable Classes

- **Mnemonic** CAC_CL
- **Description** Consider classes refactorization

Factorizable Files

- **Mnemonic** CAC_FI
- **Description** Consider files refactorization

Factorizable Functions

- **Mnemonic** CAC_FN
- **Description** Consider functions refactorization

Factorizable Packages

- **Mnemonic** CAC_PKG
- **Description** Consider packages refactorization

Cloned Classes

- **Mnemonic** CC_CL
- **Description** There shall be no duplicated classes

Cloned Files

- **Mnemonic** CC_FI
- **Description** There shall be no duplicated files

Cloned Functions

- **Mnemonic** CC_FN
- **Description** There shall be no duplicated functions

Cloned Algorithmic

- **Mnemonic** CFTC_FN
- **Description** There shall be no algorithmic cloning

There shall be a no code before first case

- **Mnemonic** NOCODEBEFORECASE
- **Description** There shall be a no code before the first case of a switch statement.

Continue shall not be used

- **Mnemonic** NOCONT
- **Description** The 'continue' statement shall not be used (see [MISRA-C:2004]: RULE 14.5).

Fallthrough shall be avoided

- **Mnemonic** NOFALLTHROUGH
- **Description** There shall be no fallthrough the next case in a switch statement.

FIXME shall not be committed in sources code

- **Mnemonic** R_NOFIXME
- **Description** FIXME shall not be committed in sources code as it brings confusion regarding code reliability.

Goto shall not be used

- **Mnemonic** NOGOTO

- **Description** The 'goto' statement shall not be used (see [MISRA-C:2004]: RULE 14.4).

Label out a switch

- **Mnemonic** NOLABEL
- **Description** A switch label shall only be used when the most closely-enclosing compound statement is the body of a switch statement (see [MISRA-C:2004]: RULE 15.1).

Avoid Duplicated Blocks in Function

- **Mnemonic** RS_FN
- **Description** There shall be no duplicated parts in functions

TODO shall not be committed in sources code

- **Mnemonic** R_NOTODO
- **Description** TODO shall not be committed in sources code as it brings confusion regarding code reliability.

Missing case in switch

- **Mnemonic** ONECASE
- **Description** Every switch statement shall have at least one case clause (see [MISRA-C:2004]: RULE 15.5).

Relaxed violation

- **Mnemonic** RELAX
- **Description** A rule violation is relaxed and justified.

Resources Filename

- **Mnemonic** RESOURCES_FILENAME
- **Description** All XAML resources files shall be suffixed with 'Resources.xaml'

Multiple exits are not allowed

- **Mnemonic** RETURN
- **Description** A function shall have a single point of exit at the end (see [MISRA-C:2004]: RULE 14.7).

Risky Empty Statement

- **Mnemonic** RISKYEMPTY
- **Description** Risky Empty Statement

Multiple break in loop are not allowed

- **Mnemonic** SGLBRK
- **Description** For any iteration statement there shall be at most one 'break' statement used for loop termination (see [MISRA-C:2004]: RULE 14.6).

Chapter 3. Repository Connectors

Folder Path

Description

The simplest method to analyse source code in Squore is to provide a path to a folder containing your code.



Remember that the path supplied for the analysis is a path local to the machine running the analysis, which may be different from your local machine. If you analyse source code on your local machine and then send results to the server, you will not be able to view the source code directly in Squore, since it will not have access to the source code on the other machine. A common workaround to this problem is to use UNC paths (`\\Server\Share`, `smb://server/share...`) or a mapped server drive in Windows.

Usage

Folder Path has the following options:

- **Datapath (path, mandatory)** Specify the absolute path to the folder containing the files you want to include in the analysis. The path specified must be accessible from the server.

The full command line syntax for Folder Path is:

```
-r "type=FROMPATH,path=[text]"
```

Zip Upload

Description

This Repository Connector allows you to upload a zip file containing your sources to analyse. Select a file to upload in the project wizard and it will be extracted and analysed on the server.



The contents of the zip file are extracted into Squore Server's temp folder. If you want to uploaded files to persist, contact your Squore administrator so that the uploaded zip files and extracted sources are moved to a location that is not deleted at each server restart.

Usage

This Repository Connector is only available from the web UI, not from the command line interface.

Synergy

Description

Rational Synergy is a software tool that provides software configuration management (SCM) capabilities for all artifacts related to software development including source code, documents and images as well as the final built software executable and libraries.

For more details, refer to <http://www-03.ibm.com/software/products/en/ratisyne>.

The Synergy Repository Connector assumes that a project already exists and that the Synergy user defined has the right to access it.

The host where the analysis takes place must have Synergy installed and fully functional. Note that, using credentials is only supported on Windows, so use the NO_CREDENTIALS option when Synergy runs on a Linux host (consult IBM's documentation at http://pic.dhe.ibm.com/infocenter/synhelp/v7m2r0/index.jsp?topic=%2Fcom.ibm.rational.synergy.manage.doc%2Ftopics%2Fsc_t_h_start_cli_session.html for more details).

The following is a list of commands used by the Synergy Repository Connector to retrieve sources:



```
ccm start -d $db -nogui -m -q [-s $server] [-pw $password] [-n $user  
-pw password]
```

```
ccm prop "$path@$projectSpec"
```

```
ccm copy_to_file_system -path $tempFolder -recurse $projectSpec
```

```
ccm cat "$artefactPath@$projectSpec"
```

```
ccm stop
```

Usage

Synergy has the following options:

- **Server URL (server):** Specify the Synergy server URL, if using a distant server. If specified, the value is used by the Synergy client via the -s parameter.
- **Database (db, mandatory):** Specify the database path to analyse the sources it contains.
- **Project Specification (projectSpec, mandatory):** Specify the project specification for the analysis. Source code contained in this project specification will be analysed recursively.
- **Subfolder (subFolder):** Specify a subfolder name if you want to restrict the scope of the analysis to a particular folder.
- **Include Subprojects (subProject, default: yes):** This option creates work area copies for the specified projects and all subprojects. If this option is not on, subprojects are ignored.
- **Ignore links (ignoreLinks, default: no):** This option is used to ignore links to subprojects. This

option is valid only on Linux systems.

- **Authentication: (useAccountCredentials, default: NO_CREDENTIALS):** Note that, as stated in IBM's documentation, using credentials is only supported on Windows. The "No Credentials" option must be used when Synergy runs on a Linux host. For more information, consult http://pic.dhe.ibm.com/infocenter/synhelp/v7m2r0/index.jsp?topic=%2Fcom.ibm.rational.synergy.manage.doc%2Ftopics%2Fsc_t_h_start_cli_session.html.
- **Username (username):**
- **Password (password):**

The full command line syntax for Synergy is:

```
-r  
"type=Synergy,server=[text],db=[text],projectSpec=[text],subFolder=[text],subProject=[  
multipleChoice],ignoreLinks=[multipleChoice],useAccountCredentials=[multipleChoice],us  
ername=[text],password=[password]"
```

ClearCase

Description

IBM Rational ClearCase is a software configuration management solution that provides version control, workspace management, parallel development support, and build auditing. The command executed on the server to check out source code is: `$cleartool $view_root_path $view $vob_root_path`.

For more details, refer to <http://www-03.ibm.com/software/products/en/clearcase>.



The ClearCase tool is configured for Linux by default. It is possible to make it work for Windows by editing the configuration file

Usage

ClearCase has the following options:

- **View root path (view_root_path, mandatory, default: /view):** Specify the absolute path of the ClearCase view.
- **Vob Root Path (vob_root_path, mandatory, default: /projets):** Specify the absolute path of the ClearCase vob.
- **View (view):** Specify the label of the view to analyse sources from. If no view is specified, the current ClearCase view will be used automatically, as retrieved by the command `cleartool pvw -s`.
- **Server Display View (server_display_view):** When viewing source code from the Explorer after building the project, this parameter is used instead of the view parameter specified earlier. Leave this field empty to use the same value as for view.
- **Sources Path (sub_path):** Specify a path in the view to restrict the scope of the source code to analyse. The value of this field must not contain the vob nor the view. Leave this field empty to analyse the code in the entire view. This parameter is only necessary if you want to restrict to

a directory lower than root.

The full command line syntax for ClearCase is:

```
-r  
"type=ClearCase,view_root_path=[text],vob_root_path=[text],view=[text],server_display_  
view=[text],sub_path=[text]"
```

Git

Description

Git is a free and open source distributed version control system designed to handle everything from small to very large projects with speed and efficiency.

For more details, refer to <http://git-scm.com/>.

The following is a list of commands used by the Git Repository Connector to retrieve sources:

```
git clone [$username:$password@$url] $tmpFolder
```

```
git checkout $commit
```

```
git log -1 "--format=%H"
```

```
git config --get  
remote.origin.url
```



```
git clone [$username:$password@$url] $tmpFolder
```

```
git checkout $commit
```

```
git fetch
```

```
git --git-dir=$gitRoot show $artefactPath
```

Git 1.7.1 is known to fail with a *fatal: HTTP request failed* error on CentOS 6.9. For this OS, it is recommended to upgrade to git 2.9 as provided by software collections on <https://www.softwarecollections.org/en/scls/rhscl/rh-git29/> and point to the new binary in *git_config.tcl* or make the change permanent as described on <https://access.redhat.com/solutions/527703>.

Usage

Git has the following options:

- **URL (*url*, mandatory):** URL of the git repository to get files from. The local, HTTP(s), SSH and Git protocols are supported.
- **Branch or commit (*commit*):** This field allows specifying the SHA1 of a commit or a branch name. If a SHA1 is specified, it will be retrieved from the default branch. If a branch label is specified, then its latest commit is analysed. Leave this field empty to analyse the latest commit of the default branch.
- **Sub-directory (*subDir*):** Specify a subfolder name if you want to restrict the analysis to a subpath of the repository root.
- **Authentication (*useAccountCredentials*, default: **NO_CREDENTIALS**):** Possible values for authentication are

- **No credentials:** Used when the underlying Git is open and does not require authentication
 - **Use my Squore credentials:** If the login/password are the same between Squore and the underlying git
 - **Define credentials:** To be prompted for login/password
- **Username (username):**
 - **Password (password):**

The full command line syntax for Git is:

```
-r  
"type=Git,url=[text],commit=[text],subDir=[text],useAccountCredentials=[multipleChoice  
,username=[text],password=[password]"
```

Perforce

Description

The Perforce server manages a central database and a master repository of file versions. Perforce supports both Git clients and clients that use Perforce's own protocol.

For more details, refer to <http://www.perforce.com/>.

The Perforce repository connector assumes that the specified depot exists on the specified Perforce server, that Squore can access this depot and that the Perforce user defined has the right to access it.

The host where the analysis takes place must have a Perforce command-line client (p4) installed and fully functional.

The P4PORT environment variable is not read by Squore. You have to set it in the form. The path to the p4 command can be configured in the *perforce_conf.tcl* file located in the *configuration/repositoryConnectors/Perforce* folder.

The following is a list of commands used by the Perforce Repository Connector to retrieve sources:

```
p4 -p $p4port [-u username] [-P password] client -i  
<$tmpFolder/p4conf.txt
```

```
p4 -p $p4port [-u username] [-P password] -c $clientName sync  
"$depot/...@$label"
```



```
p4 -p $p4port [-u username] [-P password] client -d $clientName
```

```
p4 -p $p4port [-u username] [-P password] print -q -o $outputFile  
$artefactPath
```

The format of the *p4conf.txt* file is:

```
Client: $clientName  
  
Root: $tmpFolder  
  
Options: noallwrite noclobber nocompress unlocked nomodtime normdir  
  
SubmitOptions: submitunchanged  
  
view:  
  
$depot/... //$clientName/...
```

Usage

Perforce has the following options:

- **P4PORT (p4port, mandatory):** Specify the value of P4PORT using the format [protocol:]host:port (the protocol is optional). This parameter is necessary even if you have specified an environment variable on the machine where the analysis is running.
- **Depot (depot, mandatory):** Specify the name of the depot (and optionnally subfolders)

containing the sources to be analysed.

- **Revision (label):** Specify a label, changelist or date to retrieve the corresponding revision of the sources. Leave this field empty to analyse the most recent revision for the sources.
- **Authentication (useAccountCredentials, default: NO_CREDENTIALS):**
- **Username (username):**
- **Password (password):**

The full command line syntax for Perforce is:

```
-r  
"type=Perforce,p4port=[text],depot=[text],label=[text],useAccountCredentials=[multiple  
Choice],username=[text],password=[password]"
```

SVN

Description

Connecting to an SVN server is supported using svn over ssh, or by using a username and password.

For more details, refer to <https://subversion.apache.org/>.

The following is a list of commands used by the SVN Repository Connector to retrieve sources (you can edit the common command base or the path to the executable in `<SQUORE_HOME>/configuration/repositoryConnectors/SVN/svn_conf.tcl` if needed):

```
svn info --xml --non-interactive --trust-server-cert --no-auth-cache  
[--username $username] [--password $password] [-r $revision] $url
```



```
svn export --force --non-interactive --trust-server-cert --no-auth-  
-cache [--username $username] [--password $password] [-r $revision]  
$url
```

This Repository Connector includes a hybrid SVN mode saves you an extra checkout of your source tree when using the `local_path` attribute. Consult the reference below for more details.

Usage

SVN has the following options:

- **URL (url, mandatory):** Specify the URL of the SVN repository to export and analyse. The following protocols are supported: `svn://`, `svn+ssh://`, `http://`, `https://`.

- **Revision (`rev`):** Specify a revision number in this field, or leave it blank to analyse files at the HEAD revision.
- **External references (`externals`, default: `exclude`):** Specify if when extracting sources from SVN the system should also extract external references.
- **Sources are already extracted in (`local_path`):** Specify a path to a folder where the sources have already been extracted. When using this option, sources are analysed in the specified folder instead of being checked out from SVN. At the end of the analysis, the url and revision numbers are attached to the analysed sources, so that any source code access from the web interface always retrieves files from SVN. This mode is mostly used to save an extra checkout in some continuous integration scenarios.
- **Authentication (`useAccountCredentials`, default: `NO_CREDENTIALS`):**
- **Username (`username`):**
- **Password (`password`):**

The full command line syntax for SVN is:

```
-r
"type=SVN,url=[text],rev=[text],externals=[multipleChoice],local_path=[text],useAccountCredentials=[multipleChoice],username=[text],password=[password]"
```

Folder (use GNATHub)

Description

Retrieve Sources from a folder on the server, use GNATHub to limit the files (compatible with GNAT Pro versions 7.4.2 up to 18.2).



This Repository Connector will only be available after you configure your server or client *config.xml* with the path to your gnathub executable with a `<path name="gnatub" path="C:\tools\GNATHub\gnathub.exe" />` definition. Consult the [Configuration Manual](#) for more information about referencing external executables.

Usage

Folder (use GNATHub) has the following options:

- **Path of the source files (`path`):** Specify the absolute path to the files you want to include in the analysis. The path specified must be accessible from the server.
- **Path of the gnathub.db file (`gnatdb`):** Specify the absolute path of the gnathub.db file.
- **Root path for sources in the GNAT DB (`gnat_root`):** Specify the root path for sources in the GNAT DB

The full command line syntax for Folder (use GNATHub) is:

```
-r "type=GNAThub,path=[text],gnatdb=[text],gnat_root=[text]"
```

PTC Integrity

Description

This Repository Connector allows analysing sources hosted in PTC Integrity, a software system lifecycle management and application lifecycle management platform developed by PTC.

For more details, refer to <http://www.ptc.com/products/integrity/>.



You can modify some of the settings of this repository connector if the `si.exe` and `mksAPIViewer.exe` binaries are not in your path. For versions that do not support the `--xmlapi` option, you can also turn off this method of retrieving file information. These settings are available by editing `mks_conf.tcl` in the repository connector's configuration folder.

Usage

PTC Integrity has the following options:

- **Server Hostname (hostname, mandatory):** Specify the name of the Integrity server. This value is passed to the command line using the parameter `--hostname`.
- **Port (port):** Specify the port used to connect to the Integrity server. This value is passed to the command line using the parameter `--port`.
- **Project (project):** Specify the name of the project containing the sources to be analysed. This value is passed to the command line using the `--project` parameter.
- **Revision (revision):** Specify the revision number for the sources to be analysed. This value is passed to the command line using the `--projectRevision` parameter.
- **Scope (scope, default: name:.c,name:*.h)*:** Specifies the scope (filter) for the Integrity sandbox extraction. This value is passed to the command line using the `--scope` parameter.
- **Authentication (useAccountCredentials, default: NO_CREDENTIALS):**
- **Username (username):**
- **Password (password):**

The full command line syntax for PTC Integrity is:

```
-r  
"type=MKS,hostname=[text],port=[text],project=[text],revision=[text],scope=[text],useAccountCredentials=[multipleChoice],username=[text],password=[password]"
```

CVS

Description

The Concurrent Versions System (CVS), is a client-server free software revision control system in the field of software development.

For more details, refer to <http://savannah.nongnu.org/projects/cvs>.



The following is a list of commands used by the CVS Repository Connector to retrieve sources:

```
cvs -d $repository export [-r $branch] $project
```

```
cvs -d $repository co -r $artefactPath -d $tmpFolder
```

Usage

CVS has the following options:

- **Repository (repository, mandatory):** Specify the location of the CVS Repository.
- **Project (project, mandatory):** Specify the name of the project to get files from.
- **Tag or Branch (branch):** Specify the tag or branch to get the files from.

The full command line syntax for CVS is:

```
-r "type=CVS,repository=[text],project=[text],branch=[text]"
```

TFS

Description

Team Foundation Server (TFS) is a Microsoft product which provides source code management, reporting, requirements management, project management, automated builds, lab management, testing and release management capabilities. This Repository Connector provides access to the sources hosted in TFS's revision control system.

For more details, refer to <https://www.visualstudio.com/products/tfs-overview-vs>.

The TFS repository connector (Team Foundation Server - Team Foundation Version Control) assumes that a TFS command-line client is installed and fully functional on the machine where the analysis runs. Two types of clients are supported: Team Explorer Everywhere (the java client, enabled by default) and Visual Studio Client (tf.exe).

Prior to using this repository connector, ensure that you have configured it to use the right client by adjusting settings in `<SQUORE_HOME>/configuration/repositoryConnectors/TFS/tfs_conf.tcl` file.

The Repository Connector form must be filled according to the TFS standard (eg. the Project Path must begin with the '\$' character...). Note that this repository connector works with a temporary workspace that is deleted at the end of the analysis. The following is a list of commands used by the TFS Repository Connector to retrieve sources (this example uses the Windows client):

```
tf.exe workspace [/login:$username,$password] /server:$url /noprompt  
/new $workspace
```



```
tf.exe workfold [/login:$username,$password] /map $path $tempFolder  
/workspace:$workspace
```

```
tf.exe get [/login:$username,$password] /version:$version /recursive  
/force $path
```

```
tf.exe workspace [/login:$username,$password] /delete $workspace
```

The following command is used when viewing sources in the web interface:

```
tf.exe view [/login:$username,$password] /server:$artefactPath
```

When using the Java Team Explorer Everywhere client, `/` is replaced by `-` and the **view** command is replaced by **print**.

Usage

TFS has the following options:

- **URL (URL, mandatory):** Specify the URL of the TFS server.
- **Path (path, mandatory):** Path the project to be analysed. This path usually starts with \$.
- **Version (version):** Specify the version of the sources to analyse. This field accepts a changeset number, date, or label. Leave the field empty to analyse the most recent revision of the sources.
- **Authentication (useAccountCredentials, default: NO_CREDENTIALS):**
- **Username: (username):**

- **Password (password):**

The full command line syntax for TFS is:

```
-r  
"type=TFS,url=[text],path=[text],version=[text],useAccountCredentials=[multipleChoice]  
,username=[text],password=[password]"
```

Using Multiple Nodes

Square allows using multiple repositories in the same analysis. If your project consists of some code that is spread over two distinct servers or SVN repositories, you can set up your project so that it includes both locations in the project analysis. This is done by labelling each source code node before specifying parameters, as shown below

```
-r "type=FROMPATH,alias=Node1,path=/home/projects/client-code"  
-r "type=FROMPATH,alias=Node2,path=/home/projects/common/lib"
```

Note that only alpha-numeric characters are allowed to be used as labels. In the artefact tree, each node will appear as a separate top-level folder with the label provided at project creation.

Using multiple nodes, you can also analyse sources using different Repository Connectors in the same analysis:

```
-r "type=FROMPATH,alias=Node1,path=/home/projects/common-config"  
-r "type=SVN,alias=Node2,url=svn+ssh://10.10.0.1/var/svn/project/src,rev=HEAD"
```

Chapter 4. Data Providers

This chapter describe the available Data Providers and the default parameters that they accept via the Command Line Interface.

AntiC

Description

AntiC is a part of the jlint static analysis suite and is launched to analyse C and C++ source code and produce findings.

For more details, refer to <http://jlint.sourceforge.net/>.



On Linux, the antiC executable must be compiled manually before you run it for the first time by running the command:

```
# cd {square_home}/addons/tools/Antic_auto/bin/ && gcc antic.c -o antic
```

Usage

AntiC has the following options:

- **Source code directory to analyse (dir):** Leave this parameter empty if you want to analyse all sources specified above.

The full command line syntax for AntiC is:

```
-d "type=Antic_auto,dir=[text]"
```

Automotive Coverage Import

Description

Automotive Coverage Import provides a generic import mechanism for coverage results at function level.

Usage

Automotive Coverage Import has the following options:

- **CSV file (csv):** Enter the path to the CSV containing the coverage data.

The expected format of each line contained in the file is
PATH;NAME;TESTED_C1;OBJECT_C1;TESTED_MCC;OBJECT_MCC;TESTED_MCDC;OBJECT_MCDC

The full command line syntax for Automotive Coverage Import is:

```
-d "type=Automotive_Coverage, csv=[text]"
```

Automotive Tag Import

Description

This data provider allows setting values for attributes in the project.

Usage

Automotive Tag Import has the following options:

- **CSV file (csv)**: Specify the path to the file containing the metrics.

The full command line syntax for Automotive Tag Import is:

```
-d "type=Automotive_Tag_Import, csv=[text]"
```

BullseyeCoverage Code Coverage Analyzer

Description

BullseyeCoverage is a code coverage analyzer for C++ and C. The coverage report file is used to generate metrics.

For more details, refer to <http://www.bullseye.com/>.

Usage

BullseyeCoverage Code Coverage Analyzer has the following options:

- **HTML report (html)**: Specify the path to the HTML report file generated by BullseyeCoverage.

The full command line syntax for BullseyeCoverage Code Coverage Analyzer is:

```
-d "type=BullseyeCoverage, html=[text]"
```

CANoe

Description

Import data from CANoe xml test results

For more details, refer to <https://www.vector.com/int/en/products/products-a-z/software/canoe/>.

Usage

CANoe has the following options:

- **Results folder (`dir`):** Specify the folder containing XML test results files from CANoe.
- **File suffix (`suff`, default: `.xml`):** Provide the suffix of CANoe test results files.
- **Test path (`testPath`, default: `Tests`):** Define test path (for example Test/HIL Test), by default the value is Tests.

The full command line syntax for CANoe is:

```
-d "type=CANoe,dir=[text],suff=[text],testPath=[text]"
```

CPD

Description

CPD is an open source tool which generates Copy/Paste metrics. The detection of duplicated blocks is set to 100 tokens. CPD provides an XML file which can be imported to generate metrics as well as findings.

For more details, refer to <http://pmd.sourceforge.net/pmd-5.3.0/usage/cpd-usage.html>.

Usage

CPD has the following options:

- **CPD XML results (`xml`):** Specify the path to the XML results file generated by CPD. The minimum supported version is PMD/CPD 4.2.5.

The full command line syntax for CPD is:

```
-d "type=CPD,xml=[text]"
```

Cppcheck

Description

Cppcheck is a static analysis tool for C/C++ applications. The tool provides an XML output which can be imported to generate findings.

For more details, refer to <http://cppcheck.sourceforge.net/>.

Usage

Cppcheck has the following options:

- **Cppcheck XML results (`xml`):** Specify the path to the XML results file from Cppcheck. Note that

the minimum required version of Cppcheck for this data provider is 1.61.

The full command line syntax for Cppcheck is:

```
-d "type=CPPCheck,xml=[text]"
```

Cppcheck (plugin)

Description

Cppcheck is a static analysis tool for C/C++ applications. The tool provides an XML output which can be imported to generate findings.

For more details, refer to <http://cppcheck.sourceforge.net/>.



On Windows, this data provider requires an extra download to extract the Cppcheck binary in `<SQUORE_HOME>/addons/tools/ CPPCheck_auto/` and the MS Visual C++ 2010 Redistributable Package available from <http://www.microsoft.com/en-in/download/details.aspx?id=5555>. On Linux, you can install the cppcheck application anywhere you want. The path to the Cppcheck binary for Linux can be configured in `config.tcl`. For more information, refer to the Installation and Administration Guide's '[Third-Party Plugins and Applications](#)' section.

Usage

Cppcheck (plugin) has the following options:

- **Source code folder (`dir`):** Specify the folder containing the source files to analyse. If you want to analyse all of source repositories specified for the project, leave this field empty.
- **Ignore List (`ignores`):** Specify a semi-colon-separated list of source files or source file directories to exclude from the check. For example: `"lib;/folder2/"`. Leave this field empty to deactivate this option and analyse all files with no exception.

The full command line syntax for Cppcheck (plugin) is:

```
-d "type=CPPCheck_auto,dir=[text],ignores=[text]"
```

CPPTest

Description

Parasoft C/Ctest is an integrated solution for automating a broad range of best practices proven to improve software development team productivity and software quality for C and C. The tool provides an XML output file which can be imported to generate findings and metrics.

For more details, refer to <http://www.parasoft.com/product/cpptest/>.

Usage

CPPTest has the following options:

- **Directory which contains the XML results files (`results_dir`):** Specify the path to the CPPTest results directory. This data provider is compatible with files exported from CPPTest version 7.2.10.34 and up.
- **Results file extensions (`pattern`, default: `*.xml`):** Specify the pattern of the results files

The full command line syntax for CPPTest is:

```
-d "type=CPPTest,results_dir=[text],pattern=[text]"
```

Cantata

Description

Cantata is a Test Coverage tool. It provides an XML output file which can be imported to generate coverage metrics at function level.

For more details, refer to <http://www.qa-systems.com/cantata.html>.

Usage

Cantata has the following options:

- **Cantata XML results (`xml`):** Specify the path to the XML results file from Cantata 6.2

The full command line syntax for Cantata is:

```
-d "type=Cantata,xml=[text]"
```

CheckStyle

Description

CheckStyle is an open source tool that verifies that Java applications adhere to certain coding standards. It produces an XML file which can be imported to generate findings.

For more details, refer to <http://checkstyle.sourceforge.net/>.

Usage

CheckStyle has the following options:

- **CheckStyle results file (`xml`):** Point to the XML file that contains Checkstyle results. Note that the minimum supported version is Checkstyle 5.3.

The full command line syntax for CheckStyle is:


```
-d "type=CheckStyle,xml=[text]"
```

CheckStyle (plugin)

Description

CheckStyle is an open source tool that verifies that Java applications adhere to certain coding standards. It produces an XML file which can be imported to generate findings.

For more details, refer to <http://checkstyle.sourceforge.net/>.



This data provider requires an extra download to extract the CheckStyle binary in `<SQUORE_HOME>/addons/tools/CheckStyle_auto/`. For more information, refer to the Installation and Administration Guide's '[Third-Party Plugins and Applications](#)' section. You may also deploy your own version of CheckStyle and make the Data Provider use it by editing `<SQUORE_HOME>/configuration/tools/CheckStyle_auto/config.tcl`.

Usage

CheckStyle (plugin) has the following options:

- **Configuration file (configFile):** A Checkstyle configuration specifies which modules to plug in and apply to Java source files. Modules are structured in a tree whose root is the Checker module. Specify the name of the configuration file only, and the data provider will try to find it in the CheckStyle_auto folder of your custom configuration. If no custom configuration file is found, a default configuration will be used.
- **Xmx (xmx, default: 1024m):** Maximum amount of memory allocated to the java process launching Checkstyle.
- **Excluded directory pattern (excludedDirectoryPattern):** Java regular expression of directories to exclude from CheckStyle, for example: `^test|generated-sources|.*-report$` or `ou ^lib$`

The full command line syntax for CheckStyle (plugin) is:

```
-d "type=CheckStyle_auto,configFile=[text],xmx=[text],excludedDirectoryPattern=[text]"
```

CheckStyle for SQALE (plugin)

Description

CheckStyle is an open source tool that verifies that Java applications adhere to certain coding standards. It produces an XML file which can be imported to generate findings.

For more details, refer to <http://checkstyle.sourceforge.net/>.



This data provider requires an extra download to extract the CheckStyle binary in `<SQUORE_HOME>/addons/tools/CheckStyle_auto_for_SQALE/`. For more information, refer to the Installation and Administration Guide's '[Third-Party Plugins and Applications](#)' section.

Usage

CheckStyle for SQALE (plugin) has the following options:

- **Configuration file (configFile, default: config_checkstyle_for_sqale.xml):** A Checkstyle configuration specifies which modules to plug in and apply to Java source files. Modules are structured in a tree whose root is the Checker module. Specify the name of the configuration file only, and the data provider will try to find it in the CheckStyle_auto folder of your custom configuration. If no custom configuration file is found, a default configuration will be used.
- **Xmx (xmx, default: 1024m):** Maximum amount of memory allocated to the java process launching Checkstyle.

The full command line syntax for CheckStyle for SQALE (plugin) is:

```
-d "type=CheckStyle_auto_for_SQALE,configFile=[text],xmx=[text]"
```

Cobertura format

Description

Cobertura is a free code coverage library for Java. Its XML report file can be imported to generate code coverage metrics for your Java project.

For more details, refer to <http://cobertura.github.io/cobertura/>.

Usage

Cobertura format has the following options:

- **XML report (xml):** Specify the path to the XML report generated by Cobertura (or by a tool able to produce data in this format).

The full command line syntax for Cobertura format is:

```
-d "type=Cobertura,xml=[text]"
```

CodeSonar

Description

Codesonar is a static analysis tool for C and C++ code designed for zero tolerance defect environments. It provides an XML output file which is imported to generate findings.

For more details, refer to <http://www.grammatech.com/codesonar>.

Usage

CodeSonar has the following options:

- **XML results file (xml)**: Specify the path to the XML results file generated by Codesonar. The minimum version of Codesonar compatible with this data provider is 3.3.

The full command line syntax for CodeSonar is:

```
-d "type=CodeSonar ,xml=[text]"
```

Compiler

Description

Compiler allows to import information from compiler logs.

Usage

Compiler has the following options:

- **Compiler output file(s) (txt, mandatory)**: Specify the path(s) to CSV compiler log file(s). To provide multiple files they have to be separated by a ';'.

Each line needs to match the following format: **Path;Line;Rule;Descr** where Rule is one of COMP_ERR, COMPILER_WARN or COMPILER_INFO.

The full command line syntax for Compiler is:

```
-d "type=Compiler ,txt=[text]"
```

Coverity

Description

Coverity is a static analysis tool for C, C++, Java and C#. It provides an XML output which can be imported to generate findings.

For more details, refer to <http://www.coverity.com/>.

Usage

Coverity has the following options:

- **XML results file (xml)**: Specify the path to the XML file containing Coverity results.

The full command line syntax for Coverity is:

```
-d "type=Coverity,xml=[text]"
```

ESLint

Description

ESLint is an open source tool that verifies that JavaScript applications adhere to certain coding standards. It produces an XML file which can be imported to generate findings.

For more details, refer to <https://eslint.org/>.

Usage

ESLint has the following options:

- **ESLint results file (xml)**: Point to the XML file that contains ESLint results in Checkstyle format.

The full command line syntax for ESLint is:

```
-d "type=ESLint,xml=[text]"
```

FindBugs

Description

Findbugs is an open source tool that looks for bugs in Java code. It produces an XML result file which can be imported to generate findings.

For more details, refer to <http://findbugs.sourceforge.net/>.

Usage

FindBugs has the following options:

- **XML results file (xml)**: Specify the location of the XML file containing Findbugs results. Note that the minimum supported version of FindBugs is 1.3.9.

The full command line syntax for FindBugs is:

```
-d "type=Findbugs,xml=[text]"
```

FindBugs (plugin)

Description

Findbugs is an open source tool that looks for bugs in Java code. It produces an XML result file which can be imported to generate findings. Note that the data provider requires an extra download to extract the Findbugs binary in [INSTALLDIR]/addons/tools/Findbugs_auto/. You are free to use FindBugs 3.0 or FindBugs 2.0 depending on what your standard is. For more information, refer to the Installation and Administration Manual's "Third-Party Plugins and Applications" section.

For more details, refer to <http://findbugs.sourceforge.net/>.



This data provider requires an extra download to extract the Findbugs binary in <SQUORE_HOME>/addons/tools/Findbugs_auto/. For more information, refer to the Installation and Administration Guide's '[Third-Party Plugins and Applications](#)' section.

Usage

FindBugs (plugin) has the following options:

- **Classes (class_dir, mandatory):** Specify the folders and/or jar files for your project in classpath format, or point to a text file that contains one folder or jar file per line.
- **Auxiliary Class path (auxiliarypath):** Specify a list of folders and/or jars in classpath format, or specify the path to a text file that contains one folder or jar per line. This information will be passed to FindBugs via the -auxclasspath parameter.
- **Memory Allocation (xmx, default: 1024m):** Maximum amount of memory allocated to the java process launching FindBugs.

The full command line syntax for FindBugs (plugin) is:

```
-d "type=Findbugs_auto,class_dir=[text],auxiliarypath=[text],xmx=[text]"
```

Function Relaxer

Description

Function Relaxer provides a generic import mechanism for relaxing functions in source code.

Usage

Function Relaxer has the following options:

- **CSV File (csv):**

The full command line syntax for Function Relaxer is:

```
-d "type=Function_Relaxer,csv=[text]"
```

FxCop

Description

FxCop is an application that analyzes managed code assemblies (code that targets the .NET Framework common language runtime) and reports information about the assemblies, such as possible design, localization, performance, and security improvements. FxCop generates an XML results file which can be imported to generate findings.

For more details, refer to [https://msdn.microsoft.com/en-us/library/bb429476\(v=vs.80\).aspx](https://msdn.microsoft.com/en-us/library/bb429476(v=vs.80).aspx).

Usage

FxCop has the following options:

- **XML results file (xml)**: Specify the XML file containing FxCop's analysis results. Note that the minimum supported version of FxCop is 1.35.

The full command line syntax for FxCop is:

```
-d "type=FxCop,xml=[text]"
```

GCov

Description

GCov is a Code coverage program for C application. GCov generates raw text files which can be imported to generate metrics.

For more details, refer to <http://gcc.gnu.org/onlinedocs/gcc/Gcov.html>.

Usage

GCov has the following options:

- **Directory containing results files (dir)**: Specify the path of the root directory containing the GCov results files.
- **Results files extension (ext, default: *.c.gcov)**: Specify the file extension of GCov results files.

The full command line syntax for GCov is:

```
-d "type=GCov,dir=[text],ext=[text]"
```

GNATcheck

Description

GNATcheck is an extensible rule-based tool that allows developers to completely define a coding standard. The results are output to a log file or an xml file that can be imported to generate findings.

For more details, refer to <http://www.adacore.com/gnatpro/toolsuite/gnatcheck/>.

Usage

GNATcheck has the following options:

- **Log or xml file (txt)**: Specify the path to the log file or the xml file generated by the GNATcheck run.

The full command line syntax for GNATcheck is:

```
-d "type=GnatCheck,txt=[text]"
```

GNATCompiler

Description

GNATCompiler is a free-software compiler for the Ada programming language which forms part of the GNU Compiler Collection. It supports all versions of the language, i.e. Ada 2012, Ada 2005, Ada 95 and Ada 83. It creates a log file that can be imported to generate findings.

For more details, refer to <http://www.adacore.com/gnatpro/toolsuite/compilation/>.

Usage

GNATCompiler has the following options:

- **Log file (log)**: Specify the path to the log file containing the compiler warnings.

The full command line syntax for GNATCompiler is:

```
-d "type=GnatCompiler,log=[text]"
```

JSHint

Description

JSHint is an open source tool that verifies that JavaScript applications adhere to certain coding standards. It produces an XML file which can be imported to generate findings.

For more details, refer to <http://jshint.com/>.

Usage

JSHint has the following options:

- **JSHint results file (Checkstyle formatted): (xml)**: Point to the XML file that contains JSHint results Checkstyle formatted.

The full command line syntax for JSHint is:

```
-d "type=JSHint,xml=[text]"
```

JUnit Format

Description

JUnit is a simple framework to write repeatable tests. It is an instance of the xUnit architecture for unit testing frameworks. JUnit XML result files are imported as test artefacts and links to tested classes are generated in the project.

For more details, refer to <http://junit.org/>.

Usage

JUnit Format has the following options:

- **Results folder (resultDir, mandatory)**: Specify the path to the folder containing the JUnit results (or by a tool able to produce data in this format). The data provider will parse subfolders recursively. Note that the minimum support version of JUnit is 4.10.
- **File Pattern (filePattern, mandatory, default: TEST-.xml)***: Specify the pattern for files to read reports from.
- **Root Artefact (root, mandatory, default: tests[type=TEST_FOLDER]/junit[type=TEST_FOLDER])**: Specify the name and type of the artefact under which the test artefacts will be created.

The full command line syntax for JUnit Format is:

```
-d "type=JUnit,resultDir=[text],filePattern=[text],root=[text]"
```

JaCoCo

Description

JaCoCo is a free code coverage library for Java. Its XML report file can be imported to generate code coverage metrics for your Java project.

For more details, refer to <http://www.eclemma.org/jacoco/>.

Usage

JaCoCo has the following options:

- **XML report (xml, mandatory)**: Specify the path to the XML report generated by JaCoCo. Note that the folder containing the XML file must also contain JaCoCo's report DTD file, available from <http://www.eclemma.org/jacoco/trunk/coverage/report.dtd>. XML report files are supported from version 0.6.5.

The full command line syntax for JaCoCo is:

```
-d "type=Jacoco,xml=[text]"
```

Klocwork

Description

Klocwork is a static analysis tool. Its XML result file can be imported to generate findings.

For more details, refer to <http://www.klocwork.com>.

Usage

Klocwork has the following options:

- **XML results file (xml)**: Specify the path to the XML results file exported from Klocwork. Note that Klocwork version 9.6.1 is the minimum required version.

The full command line syntax for Klocwork is:

```
-d "type=Klocwork,xml=[text]"
```

Klocwork MISRA

Description

Klocwork is a static analysis tool. Its XML result file can be imported to generate findings.

For more details, refer to <http://www.klocwork.com>.

Usage

Klocwork MISRA has the following options:

- **XML results file (xml)**: Specify the path to the XML results file exported from Klocwork. Note that Klocwork version 9.6.1 is the minimum required version.

The full command line syntax for Klocwork MISRA is:

```
-d "type=Klocwork_misra,xml=[text]"
```

Rational Logiscope

Description

The Logiscope suite allows the evaluation of source code quality in order to reduce maintenance cost, error correction or test effort. It can be applied to verify C, C++, Java and Ada languages and produces a CSV results file that can be imported to generate findings.

For more details, refer to <http://www.kalimetrix.com/en/logiscope>.

Usage

Rational Logiscope has the following options:

- **RuleChecker results file (csv):** Specify the path to the CSV results file from Logiscope.

The full command line syntax for Rational Logiscope is:

```
-d "type=Logiscope, csv=[text]"
```

MSTest

Description

MS-Test automates the process of testing Windows applications. It combines a Windows development language, Basic, with a testing-oriented API.

For more details, refer to https://en.wikipedia.org/wiki/Visual_Test.

Usage

MSTest has the following options:

- **MSTest results directory (resultDir):** Specify the path to the results directory generated by MSTest.
- **Test result file pattern (filePattern):** Specify the pattern of files to extract Test data from.

The full command line syntax for MSTest is:

```
-d "type=MSTest,resultDir=[text],filePattern=[text]"
```

MSTest Code Coverage

Description

MSTest is a code coverage library for C#. Its XML report file can be imported to generate code coverage metrics for your C# project.

Usage

MSTest Code Coverage has the following options:

- **XML report (xml)**: Specify the path to the XML report generated by MSTest Visual Studio 2017.

The full command line syntax for MSTest Code Coverage is:

```
-d "type=MSTest_Coverage,xml=[text]"
```

MemUsage

Description

Usage

MemUsage has the following options:

- **Memory Usage excel file (excel)**:

The full command line syntax for MemUsage is:

```
-d "type=MemUsage,excel=[text]"
```

NCover

Description

NCover is a Code coverage program for C# application. NCover generates an XML results file which can be imported to generate metrics.

For more details, refer to <http://www.ncover.com/>.

Usage

NCover has the following options:

- **XML results file (xml)**: Specify the location of the XML results file generated by NCover. Note that the minimum supported version is NCover 3.0.

The full command line syntax for NCover is:

```
-d "type=NCover,xml=[text]"
```

Oracle PLSQL compiler Warning checker

Description

This data provider reads an Oracle compiler log file and imports the warnings as findings. Findings extracted from the log file are filtered using a prefix parameter.

For more details, refer to <http://www.oracle.com/>.

Usage

Oracle PLSQL compiler Warning checker has the following options:

- **Compiler log file (log):**
- **Prefixes (prefix):** Prefixes and their replacements are specified as pairs using the syntax [prefix1|node1;prefix2|node2]. Leave this field empty to disable filtering.

The parsing algorithm looks for lines fitting this pattern:

[PATH;SCHEMA;ARTE_ID;ARTE_TYPE;LINE;COL;SEVERITY_TYPE;WARNING_ID;SEVERITY_ID;DESCR] and keeps lines where [PATH] begins with one of the input prefixes. In each kept [PATH], [prefix] is replaced by [node]. If [node] is empty, [prefix] is removed from [PATH], but not replaced. Some valid syntaxes for prefix:

One prefix to remove: svn://aaaa:12345/valid/path/from/svn

One prefix to replace: svn://aaaa:12345/valid/path/from/svn|node1

Two prefixes to remove:
svn://aaaa:12345/valid/path/from/svn;svn://bbbb:12345/valid/path/from/other_svn|

Two prefixes to remove:
svn://aaaa:12345/valid/path/from/svn;svn://bbbb:12345/valid/path/from/other_svn

Two prefixes to replace:
svn://aaaa:12345/valid/path/from/svn|node1;svn://bbbb:12345/valid/path/from/other_svn|node2

The full command line syntax for Oracle PLSQL compiler Warning checker is:

```
-d "type=Oracle_PLSQLCompiler,log=[text],prefix=[text]"
```

MISRA Rule Checking using PC-lint

Description

PC-lint is a static code analyser. The PC-lint data provider reads an PC-lint log file and imports MISRA violations as findings.

For more details, refer to <http://www.gimpel.com/html/pcl.htm>.

Usage

MISRA Rule Checking using PC-lint has the following options:

- **Log file folder (logDir)**: Specify the path to the folder containing the PC-lint log files.
- **Extensions to exclude (excludedExtensions, default: .h;.H)**: Specify the file extensions to exclude from the reported violations.

The full command line syntax for MISRA Rule Checking using PC-lint is:

```
-d "type=PC_Lint_MISRA,logDir=[text],excludedExtensions=[text]"
```

PMD

Description

PMD scans Java source code and looks for potential problems like possible bugs, dead code, sub-optimal code, overcomplicated expressions, duplicate code... The XML results file it generates is read to create findings.

For more details, refer to <http://pmd.sourceforge.net>.

Usage

PMD has the following options:

- **XML results file (xml)**: Specify the path to the PMD XML results file. Note that the minimum supported version of PMD for this data provider is 4.2.5.

The full command line syntax for PMD is:

```
-d "type=PMD,xml=[text]"
```

PMD (plugin)

Description

PMD scans Java source code and looks for potential problems like possible bugs, dead code, sub-optimal code, overcomplicated expressions, duplicate code ... The XML results file it generates is read to create findings.

For more details, refer to <http://pmd.sourceforge.net>.



This data provider requires an extra download to extract the PMD binary in `<SQUORE_HOME>/addons/tools/PMD_auto/`. For more information, refer to the Installation and Administration Guide's '[Third-Party Plugins and Applications](#)' section. You may also deploy your own version of PMD and make the Data Provider use it by editing `<SQUORE_HOME>/configuration/tools/PMD_auto/config.tcl`.

Usage

PMD (plugin) has the following options:

- **Ruleset file (configFile):** Specify the path to the PMD XML ruleset you want to use for this analysis. If you do not specify a ruleset, the default one from `INSTALLDIR/addons/tools/PMD_auto` will be used.

The full command line syntax for PMD (plugin) is:

```
-d "type=PMD_auto,configFile=[text]"
```

Polyspace

Description

Polyspace is a static analysis tool which includes a MISRA checker. It produces an XML output which can be imported to generate findings. Polyspace Verifier detects RTE (RunTime Error) such as Division by zero, Illegal Dereferencing Pointer, Out of bound array index... Such information is turned into statistical measures at function level. Number of Red (justified/non-justified), Number of Grey (justified/non-justified), Number of Orange (justified/non-justified), Number of Green.

For more details, refer to <http://www.mathworks.com/products/polyspace/index.html>.

Usage

Polyspace has the following options:

- **DocBook results file (xml):** Specify the path to the DocBook (main xml file) generated by Polyspace.
- **Ignore source file path (ignoreSourceFilePath, default: false):** Removes all path elements when doing the mapping between files in Squire project and files in the Polyspace report. Be careful this can work only if file names in Squire project are unique.

The full command line syntax for Polyspace is:

```
-d "type=Polyspace,xml=[text],ignoreSourceFilePath=[booleanChoice]"
```

MISRA Rule Checking with QAC

Description

QAC identifies problems in C source code caused by language usage that is dangerous, overly complex, non-portable, difficult to maintain, or simply diverges from coding standards. Its CSV results file can be imported to generate findings.

For more details, refer to <http://www.phaedsys.com/principals/programmingresearch/pr-qac.html>.

Usage

MISRA Rule Checking with QAC has the following options:

- **Code Folder (logDir):** Specify the path to the folder that contains the annotated files to process.

For the findings to be successfully linked to their corresponding artefact, several requirements have to be met:

- The annotated file name should be [Original source file name].txt

e.g. The annotation of file "controller.c" should be called "controller.c.txt"

- The annotated file location in the annotated directory should match the associated source file location in the source directory.

e.g. The annotation for source file "[SOURCE_DIR]/subDir1/subDir2/controller.c" should be located in "[ANNOTATIONS_DIR]/subDir1/subDir2/controller.c.txt"

The previous comment suggests that the source and annotated directory are different.

However, these directories can of course be identical, which ensures that locations of source and annotated files are the same.

- **Extension (ext, default: html):** Specify the extension used by QAC to create annotated files.
- **Force import of all QAC violations (not only MISRA) (force_all_import, default: false):** Force the import of all QAC findings (not only the MISRA violations)

The full command line syntax for MISRA Rule Checking with QAC is:

```
-d "type=QAC_MISRA,logDir=[text],ext=[text],force_all_import=[booleanChoice]"
```

Unit Test Status from Rational Test RealTime

Description

Rational Test RealTime is a cross-platform solution for component testing and runtime analysis of embedded software. This Data Provider extracts coverage results, as well as tests and their status

For more details, refer to <http://www-01.ibm.com/software/awdtools/test/realtime/>.

Usage

Unit Test Status from Rational Test RealTime has the following options:

- **.xrd folder (logDir)**: Specify the path to the folder containing the .xrd files generated by RTRT.
- **Excluded file extensions (excludedExtensions, default: .h;.H)**:
- **Do you want to include FE (Function and Exit) in MDCD computation? (include_fe_in_mcdc, default: false)**:
- **Generate Test artefacts and structure from .xrd files? (generateTests, default: false)**:

The full command line syntax for Unit Test Status from Rational Test RealTime is:

```
-d
"type=RTRT,logDir=[text],excludedExtensions=[text],include_fe_in_mcdc=[booleanChoice],
generateTests=[booleanChoice]"
```

ReqIF

Description

RIF/ReqIF (Requirements Interchange Format) is an XML file format that can be used to exchange requirements, along with its associated metadata, between software tools from different vendors.

For more details, refer to <http://www.omg.org/spec/ReqIF/>.

Usage

ReqIF has the following options:

- **Reqif Directory (dir)**: Specify the directory which contains the Reqif files
- **Spec Object Type (objType, default: AUTO)**: Specify the SPEC_OBJECT_TYPE property LONG-NAME to be used to process the Reqif file. Using the _AUTO_ value will let the Data Provider extract the value fro the Reqif file, and assumes that there is only one such definition.

The full command line syntax for ReqIF is:

```
-d "type=ReqIf,dir=[text],objType=[text]"
```

SQL Code Guard

Description

SQL Code Guard is a free solution for SQL Server that provides fast and comprehensive static analysis for T-Sql code, shows code complexity and objects dependencies.

For more details, refer to <http://www.sqlcodeguard.com>.

Usage

SQL Code Guard has the following options:

- **XML results (xml)**: Specify the path to the XML files containing SQL Code Guard results.

The full command line syntax for SQL Code Guard is:

```
-d "type=SQLCodeGuard,xml=[text]"
```

Squan Sources

Description

Squan Sources provides basic-level analysis of your source code.

For more details, refer to <https://support.squoring.com>.

The analyser can output info and warning messages in the build logs. Recent additions to those logs include better handling of structures in C code, which will produce these messages:

- [Analyzer] Unknown syntax declaration for function XXXXX at line yyy to indicate that we would have found a function but, probably due to preprocessing directives, we are not able to parse it.
- [Analyzer] Unbalanced () blocks found in the file. Probably due to preprocessing directives, parenthesis in the file are not well balanced.
- [Analyzer] Unbalanced {} blocks found in the file. Probably due to preprocessing directives, curly brackets in the file are not well balanced.



You can specify the languages for your source code by passing pairs of language and extensions to the [languages](#) parameter. Extensions are case-sensitive and cannot be used for two different languages. For example, a project mixing php and javascript files can be analysed with:

```
--dp "type=SQuORE,languages=php:.php;javascript:.js,.JS"
```

In order to launch an analysis using all the available languages by default, do not specify the [languages](#) parameter in your command line.

Usage

Squan Sources has the following options:

- **Languages** ([languages](#), **default: ada;c;cpp;csharp;cobol;java;fortran77;fortran90;php;python;vbnet**): Check the boxes for the languages used in the specified source repositories. Adjust the list of file extensions as necessary. Note that two languages cannot use the same file extension, and that the list of extensions is case-sensitive. Tip: Leave all the boxes unchecked and Squan Sources will auto-detect the language parser to use.
- **Force full analysis (rebuild_all, default: false)**: Analyses are incremental by default. Check this box if you want to force the source code parser to analyse all files instead of only the ones

that have changed since the previous analysis. This is useful if you added new rule files or text parsing rules and you want to re-evaluate all files based on your modifications.

- **Generate control graphs (`genCG`, default: `true`):** This option allows generating a control graph for every function in your code. The control graph is visible in the dashboard of the function when the analysis completes.
- **Use qualified names (`qualified`, default: `false`):** Note: This option cannot be modified in subsequent runs after you create the first version of your project.
- **Limit analysis depth (`depth`, default: `false`):** Use this option to limit the depth of the analysis to file-level only. This means that Squan Sources will not create any class or function artefacts for your project.
- **Add a 'Source Code' node (`scnode`, default: `false`):** Using this options groups all source nodes under a common source code node instead of directly under the APPLICATION node. This is useful if other data providers group non-code artefacts like tests or requirements together under their own top-level node. This option can only be set when you create a new project and cannot be modified when creating a new version of your project.
- **'Source Code' node label (`scnode_name`, default: `Source Code`):** Specify a custom label for your main source code node. Note: this option is not modifiable. It only applies to projects where you use the "Add a 'Source Code' node" option. When left blank, it defaults to "Source Code".
- **Compact folders (`compact_folder`, default: `true`):** When using this option, folders with only one son are aggregates together. This avoids creating many unnecessary levels in the artefact tree to get to the first level of files in your project. This option cannot be changed after you have created the first version of your project.
- **Content exclusion via regexp (`pattern`):** Specify a PERL regular expression to automatically exclude files from the analysis if their contents match the regular expression. Leave this field empty to disable content-based file exclusion.
- **File Filtering (`files_choice`, default: `Exclude`):** Specify a pattern and an action to take for matching file names. Leave the pattern empty to disable file filtering.
- **pattern (`pattern_files`):** Use a shell-like wildcard e.g. `*-test.c`.
 - `*` Matches any sequence of characters in string, including a null string.
 - `?` Matches any single character in string.
 - `[chars]` Matches any character in the set given by chars. If a sequence of the form `x-y` appears in chars, then any character between `x` and `y`, inclusive, will match. On Windows, this is used with the `-nocase` option, meaning that the end points of the range are converted to lower case first. Whereas `[A-z]` matches `'_'` when matching case-sensitively (`'_'` falls between the `'Z'` and `'a'`), with `-nocase` this is considered like `[A-Za-z]`.
 - `\x` Matches the single character `x`. This provides a way of avoiding the special interpretation of the characters `*?[]` in pattern.

Tip: Use `';` to separate multiple patterns.

How to specify a file:

- By providing its name, containing or not a pattern
- By providing its name and its path, both containing or not a pattern

e.g.

- `*D??!g.*` : will match `MyDialog.java`, `WinDowlog.c`, ... anywhere in the project
- `*/[Dd]ialog/*D??!g.*` : will match `src/java/Dialog/MyDialog.java`, `src/c/dialog/WinDowlog.c`, but not `src/Dlg/c/WinDowlog.c`

- **Folder Filtering (`dir_choice`, default: `Exclude`):** Specify a pattern and an action to take for matching folder names. Leave the pattern empty to disable folder filtering.
- **pattern (`pattern_dir`):** Use a shell-like wildcard e.g. 'Test_*'.
 - * Matches any sequence of characters in string, including a null string.
 - ? Matches any single character in string.
 - [chars] Matches any character in the set given by chars. If a sequence of the form x-y appears in chars, then any character between x and y, inclusive, will match. On Windows, this is used with the `-nocase` option, meaning that the end points of the range are converted to lower case first. Whereas [A-z] matches '_' when matching case-sensitively ('_' falls between the 'Z' and 'a'), with `-nocase` this is considered like [A-Za-z].
 - \x Matches the single character x. This provides a way of avoiding the special interpretation of the characters *?[] in pattern.

Tip: Use ';' to separate multiple patterns.

A directory can be specified:

- By providing its name, containing or not a pattern
- By providing its name and its path, both containing or not a pattern. In that case the full path has to match.

e.g.

- `source?` : will match directories `source`, `sources`, ... anywhere in the project
- `src/tests` : will not match any directory because the full path can not match
- `*/src/tests` : will match `java/src/tests`, `native/c/src/tests`, ...

To get the root path of the project it is possible to use the nodes variables (`$src`, `$Node1`, ...). Refers to "Using Data Provider Input Files From Version Control" in the Getting Started to learn more.

e.g. `$src/source/tests` will match only the directory `source/tests` if it is a root directory of the project.

- **Exclude files whose size exceeds (`size_limit`, default: `500000`):** Provide the size in bytes above which files are excluded automatically from the Squore project (Big files are usually generated files or test files). Leave this field empty to deactivate this option.
- **Detect algorithmic cloning (`clAlg`, default: `true`):** When checking this box, Squan Sources launches a cloning detection tool capable of finding algorithmic cloning in your code.
- **Detect text cloning (`clTxt`, default: `true`):** When checking this box, Squan Sources launches a cloning detection tool capable of finding text duplication in your code.
- **Ignore blank lines (`clIgnBlk`, default: `true`):** When checking this box, blank lines are ignored when searching for text duplication
- **Ignore comment blocks (`clIgnCmt`, default: `true`):** When checking this box, blocks of comments are ignored when searching for text duplication
- **Minimum size of duplicated blocks (`clRSlen`, default: `10`):** This threshold defines the minimum size (number of lines) of blocks that can be reported as cloned.
- **Textual Cloning fault ratio (`clFR`, default: `0.1`):** This threshold defines how much cloning between two artefacts is necessary for them to be considered as clones by the text duplication tool. For example, a fault ratio of 0.1 means that two artefacts are considered clones if less than 10% of their contents differ.

- **Algorithmic cloning fault ratio (clAlgFR, default: 0.1):** This threshold defines how much cloning between two artefacts is necessary for them to be considered as clones by the algorithmic cloning detection tool.
- **Compute Textual stability (genTs, default: true):** This option allows keeping track of the stability of the code analysed for each version. The computed stability is available on the dashboard as a metric called and can be interpreted as 0% meaning completely changed and 100% meaning not changed at all.
- **Compute Algorithmic stability (genAs, default: true):** This option allows keeping track of the stability of the code analysed for each version. The computed stability is available on the dashboard as a metric called Stability Index (SI) and can be interpreted as 0% meaning completely changed and 100% meaning not changed at all.
- **Detect artefact renaming (clRen, default: true):** This option allows Squan Sources to detect artefacts that have been moved since the previous version, ensuring that the stability metrics of the previous artefact are passed to the new one. This is typically useful if you have moved a file to a different folder in your source tree and do not want to lose the previous metrics generated for this file. If you do not use this option, moved artefacts will be considered as new artefacts.
- **Mark relaxed findings as suspicious (susp, default: MODIFIED_BEFORE):** This option sets the suspicious flag on relaxed findings depending of the selected option. Applies on source code artifacts only.
- **Accept Relaxation from source code comment (relax, default: true): Relaxing Violations in Code**

Square interprets comments formatted in one of these three ways:

- Inline Relaxation

This syntax is used to relax violations on the current line.

```
some code; /* %RELAX<keys> : Text to justify the relaxation */
```


- Relax Next Line

This syntax is used to relax a violation on the first following line that is not a comment. In the example the text of the justification will be: "Text to justify the relaxation the text of the justification continues while lines are made of comments only"

```
/* >RELAX<keys> : Text to justify the relaxation */
```

```
/* the text of the justification continues while */
```

```
/* lines are made of comments only */
```

```
some code;
```


- Block Relaxation

This syntax is used to relax violations in an entire block of code.

```
/* {{ RELAX<keys> : Text to justify the relaxation */
```

```
/* like for format 2 text can be on more than one line */
```



```
-d "type=SQuOREImport,inputDir=[text]"
```

Squore Virtual Project

Description

Squore Virtual Project is a data provider that can use the output of several projects to compile metrics in a meta-project composed of the import sub-projects.

For more details, refer to <https://support.squoring.com>.

Usage

Squore Virtual Project has the following options:

- **Paths to output.xml files (output):** Specify the paths to all the output.xml files you want to include in the virtual project. Separate paths using ';'.

The full command line syntax for Squore Virtual Project is:

```
-d "type=SQuOREVirtualProject,output=[text]"
```

StyleCop

Description

StyleCop is a C# code analysis tool. Its XML output is imported to generate findings.

For more details, refer to <https://stylecop.codeplex.com/>.

Usage

StyleCop has the following options:

- **XML results file (xml):** Specify the path to the StyleCop XML results file. The minimum version compatible with this data provider is 4.7.

The full command line syntax for StyleCop is:

```
-d "type=StyleCop,xml=[text]"
```

StyleCop (plugin)

Description

StyleCop is a C# code analysis tool. Its XML output is imported to generate findings.

For more details, refer to <https://stylecop.codeplex.com/>.



Note that this data provider is not supported on Linux. On windows, this data provider requires an extra download to extract the StyleCop binary in `<SQUORE_HOME>/addons/tools/StyleCop_auto/` and .NET framework 3.5 to be installed on your machine (run `Net.SF.StyleCopCmd.Console.exe` manually once to install .NET automatically). For more information, refer to the Installation and Administration Guide's '[Third-Party Plugins and Applications](#)' section.

Usage

StyleCop (plugin) has the following options:

- **Solution (sln)**: Specify the path to the .sln file to analyse. Leave empty to analyse all .sln found in the source repository.

The full command line syntax for StyleCop (plugin) is:

```
-d "type=StyleCop_auto,sln=[text]"
```

Tessy

Description

Tessy is a tool automating module/unit testing of embedded software written in dialects of C/C++. Tessy generates an XML results file which can be imported to generate metrics. This data provider supports importing files that have a `xml_version="1.0"` attribute in their header.

For more details, refer to <https://www.hitex.com/en/tools/tessy/>.

Usage

Tessy has the following options:

- **Results folder (resultDir)**: Specify the top folder containing XML result files from Tessy. Note that this data provider will recursively scan sub-folders looking for index.xml files to aggregate results.

The full command line syntax for Tessy is:

```
-d "type=Tessy,resultDir=[text]"
```

VectorCAST

Description

The VectorCAST Data Provider extracts coverage results, as well as tests and their status

For more details, refer to <https://www.vectorcast.com/>.

Usage

VectorCAST has the following options:

- **HTML Report (`html_report`):** Specify the path to the HTML report which contains the test results.
- **Source code file extension (`file_extension`, default: `.c`):** Source code file extension
- **Create test artefacts from HTML report (`generateTests`, default: `false`):**
- **Sub Folder for test results (`sub_root`):** Sub Folder for test results.

The full command line syntax for VectorCAST is:

```
-d  
"type=VectorCAST,html_report=[text],file_extension=[text],generateTests=[booleanChoice  
],sub_root=[text]"
```

VectorCAST API

Description

The VectorCAST Data Provider extracts coverage results, as well as tests and their status

For more details, refer to <https://www.vectorcast.com/>.

Usage

VectorCAST API has the following options:

- **Sub Folder for test results (`sub_root`, default: `Tests`):** Sub Folder for test results.
- **Generate the Squire Report? (`generate_report`, mandatory):** Do you need to generate the Squire Report on the fly?
- **VectorCAST Project File or Directory (`.vce` or `.vcp`) (`project_file_list`):** Specify the file or directory which contains all the vectorCAST projects to import.
- **Squire Report Folder (`.sqc`) (`squire_report_folder`)*:** Specify the folder which contains all the Squire report (`*.sqc` files)
- **Don't Be "case sensitive" (`case_sensitive_option`, default: `true`):** Don't Be "case sensitive"

The full command line syntax for VectorCAST API is:


```
-d "type=VectorCAST_API,sub_root=[text],generate_report=[multipleChoice],project_file_list=[text],square_report_folder=[text],case_sensitive_option=[booleanChoice]"
```

Bauhaus

Description

Import Findings from Bauhaus

For more details, refer to <http://www.axivion.com>.

Usage

Bauhaus has the following options:

- **CSV File (csv)**: Specify the CSV file which contains the findings results (MISRA, Coding Style...)

The full command line syntax for Bauhaus is:

```
-d "type=bauhaus,csv=[text]"
```

CodeSniffer

Description

CodeSniffer is a rulechecker for PHP and Javascript

For more details, refer to <http://www.squizlabs.com/php-codesniffer>.

Usage

CodeSniffer has the following options:

- **CodeSniffer results file (checkstyle formatted xml) (xml)**: Point to the XML file that contains CodeSniffer results.

The full command line syntax for CodeSniffer is:

```
-d "type=codesniffer,xml=[text]"
```

Configuration Checker

Description

Use this tool to check for duplicated files or XML Elements between a custom configuration and the standard configuration.

Usage

Configuration Checker has the following options:

- **Standard Configuration Path (s):**
- **Custom Configurations Path (p):**

The full command line syntax for Configuration Checker is:

```
-d "type=conf-checker,s=[text],p=[text]"
```

Csv Coverage Import

Description

Csv Coverage Import provides a generic import mechanism for coverage results at function level

Usage

Csv Coverage Import has the following options:

- **CSV file (csv):** Enter the path to the CSV containing the coverage data.

The expected format of each line contained in the file is
PATH;NAME;TESTED_C1;OBJECT_C1;TESTED_MCC;OBJECT_MCC;TESTED_MCDC;OBJECT_MCDC;TCOV_MCC;TCOV_MCDC;TCOV_C1

The full command line syntax for Csv Coverage Import is:

```
-d "type=csv_coverage,csv=[text]"
```

CSV Findings

Description

CSV Findings is a generic tool that allows importing findings into the project.

Usage

CSV Findings has the following options:

- **CSV File(s) (csv):** Specify the path(s) to your CSV file(s) containing findings. To provide multiple files they have to be separated by a ';'. Each line in the file must use the following format and the file should include the following header:

FILE;FUNCTION;RULE_ID;MESSAGE;LINE;COL;STATUS;STATUS_MESSAGE;TOOL

The full command line syntax for CSV Findings is:

```
-d "type=csv_findings, csv=[text]"
```

CSV Import

Description

Imports artefacts, metrics, findings, textual information and links from one or more CSV files. The expected CSV format for each of the input files is described in the user manuals in the `csv_import` framework reference.



Consult [csv_import Reference](#) for more details about the expected CSV format.

Usage

CSV Import has the following options:

- **CSV Separator** (`separator`, **default: ;**): Specify the CSV Separator used in the CSV file.
- **CSV Delimiter** (`delimiter`, **default: "**): CSV Delimiter is used when the separator is used inside a cell value. If a delimiter is used as a char in a cell it has to be doubled.

The ' char is not allowed as a delimiter.
- **Artefact Path Separator** (`pathSeparator`, **default: /**): Specify the character used as a separator in an artefact's path in the input CSV file.
- **Case-sensitive artefact lookup** (`pathAreCaseSensitive`, **default: true**): When this option is turned on, artefacts in the CSV file are matched with existing source code artefacts in a case-sensitive manner.
- **Ignore source file path** (`ignoreSourceFilePath`, **default: false**): When ignoring source file path it is your responsibility to ensure that file names are unique in the project.
- **Create missing files** (`createMissingFile`, **default: false**): Automatically creates the artefacts declared in the CSV file if they do not exist.
- **Ignore finding if artefact not found** (`ignoreIfArtefactNotFound`, **default: true**): If a finding can not be attached to any artefact then it is either ignored (checked) or it is attached to the project node instead (unchecked).
- **Unknown rule ID** (`unknownRuleId`): For findings of a type that is not in your ruleset, set a default rule ID. The value for this parameter must be a valid rule ID from your analysis model.
- **Measure ID for orphan artifacts count** (`orphanArteCountId`): To save the total count of orphan findings as a metric at application level, specify the ID of the measure to use in your analysis model.
- **Measure ID for unknown rules count** (`orphanRulesCountId`): To save the total count of unknown rules as a metric at application level, Specify the ID of the measure to use in your analysis model.

- **Information ID receiving the list of unknown rules IDs (`orphanRulesListId`):** To save the list of unknown rule IDs as textual information at application level, specify the ID of the textual information to use in your analysis model.
- **CSV File (`csv`):** Specify the path to the input CSV file containing artefacts, metrics, findings, textual information, links and keys.
- **Metrics CSV File (`metrics`):** Specify the path to the CSV file containing metrics.
- **Infos CSV File (`infos`):** Specify the path to the CSV file containing textual information.
- **Findings CSV File (`findings`):** Specify the path to the CSV file containing findings.
- **Keys CSV File (`keys`):** Specify the path to the CSV file containing artefact keys.
- **Links CSV File (`links`):** Specify the path to the CSV file containing links.
- **Reports artefacts mapping problem as (`level`, default: `info`):** When an artefact referenced in the csv file can not be found in the project, reports the problem as an information or as a warning.

The full command line syntax for CSV Import is:

```
-d "type=csv_import,separator=[text],delimiter=[text],pathSeparator=[text],pathAreCaseSensitive=[booleanChoice],ignoreSourceFilePath=[booleanChoice],createMissingFile=[booleanChoice],ignoreIfArtefactNotFound=[booleanChoice],unknownRuleId=[text],orphanArteCountId=[text],orphanRulesCountId=[text],orphanRulesListId=[text],csv=[text],metrics=[text],infos=[text],findings=[text],keys=[text],links=[text],level=[multipleChoice]"
```

Csv Tag Import

Description

This data provider allows setting values for attributes in the project.

Usage

Csv Tag Import has the following options:

- **CSV file (`csv`):** Specify the path to the file containing the metrics.

The full command line syntax for Csv Tag Import is:

```
-d "type=csv_tag_import,csv=[text]"
```

Generic Findings Xml Import

Description

Generic Findings Xml Import

Usage

Generic Findings Xml Import has the following options:

- **Xml File (xml)**: Specify the XML file which contains the findings results (MISRA, Coding Style...)
- **"Issue" mapping definition (issue)**:
- **"Rule Id" mapping definition (id_rule)**:
- **"Message" mapping definition (message)**:
- **"File" mapping definition (file)**:
- **"Line" mapping definition (line)**:
- **"Justification" mapping definition (justification)**:

The full command line syntax for Generic Findings Xml Import is:

```
-d  
"type=findings_xml,xml=[text],issue=[text],id_rule=[text],message=[text],file=[text],l  
ine=[text],justification=[text]"
```

GNATHub

Description

Import data from GNATHub. GNATHub integrates and aggregates the results of AdaCore's various static and dynamic analysis tools (GNATmetric, GNATcheck, GNATcoverage, CodePeer). Compatible with GNAT Pro versions 7.4.2 up to 18.2.

For more details, refer to <https://www.adacore.com/gnatpro/toolsuite/gnatdashboard>.



This Data Provider will only be available after you configure your server or client *config.xml* with the path to your gnathub executable with a `<path name="gnathub" path="C:\tools\GNATHub\gnathub.exe" />` definition. Consult the [Configuration Manual](#) for more information about referencing external executables.

Usage

GNATHub has the following options:

- **Path of the gnathub.db file (gnatdb)**: Specify the absolute path of the gnathub.db file.

The full command line syntax for GNATHub is:

```
-d "type=gnathub,gnatdb=[text]"
```

CPU Data Import

Description

CPU Data Import provides a generic import mechanism for CPU data from a CSV or Excel file.

Usage

CPU Data Import has the following options:

- **Root node name (`root_node`, default: `Resources`):** Specify the name of root node in the artefact tree.
- **Data File (`xls_file`):** Specify the path to the file containing CPU information.
- **Sheet Name (`xls_sheetname`):** Specify the name of the Excel sheet that contains the CPU list.
- **CPU Column name (`xls_key`):** Specify the header name of the column which contains the CPU key.
- **Grouping Structure (`xls_groups`):** Specify the headers for Grouping Structure, separated by ";".
- **Filtering (`xls_filters`):** Specify the list of Header for filtering

For example: "`column_name_1=regex1;column_name_2=regex2;`"

- **Specify the csv separator (`csv_separator`, default: `;`):** Specify the csv separator
- **"CPU Loop Time" Column name (`cpu_loop_column_name`, default: `Total Loop Time [ms]`):** Specify the column name of the CPU Loop Time (Ex: "Total Loop Time [ms]")
- **"Average Idle Time per loop" Column name (`cpu_idle_column_name`, default: `Average idle Time per loop [ms]`):** Specify the column name of the Average Idle Time per loop (Ex: "Average idle Time per loop [ms]")
- **"Worst Case Idle Time per loop" Column name (`cpu_worst_column_name`, default: `Worse case idle Time per loop [ms]`):** Specify the column name of the Worst Case Idle Time per loop (Ex: "Worse case idle Time per loop [ms]")
- **Create an output file (`createOutput`, default: `true`):** Create an output file

The full command line syntax for CPU Data Import is:

```
-d  
"type=import_cpu,root_node=[text],xls_file=[text],xls_sheetname=[text],xls_key=[text],  
xls_groups=[text],xls_filters=[text],csv_separator=[text],cpu_loop_column_name=[text],  
cpu_idle_column_name=[text],cpu_worst_column_name=[text],createOutput=[booleanChoice]"
```

Excel Import

Description

Excel Import

Usage

Excel Import has the following options:

- **Input file (`input_file`):** Specify the Excel input file (absolute path)
- **Sheetname (`sheetname`):** Sheetname to read data from
- **Artefact Type (`artefact_type`):** Artefact Type used by Squore Analysis model.

Example: TEST

- **Artefact Type container (`artefact_type_container`):** Artefact Type container used by Squore Analysis model.

Example: TEST_FOLDER

- **Artefact unique ID (`artefact_uid`):** Optional unless you want to use links to these artefacts.

This is the artefact unique ID, to be used by links, from this Data Provider, or another Data Provider. Examples:

- `${ID}`
- `T_${Name}`
- `${Name} ${Descr}`

Note: `${NAME}` designates the column called NAME

- **Links to this artefact (`artefact_link`):** Specify how to create links between this artefact and other artefacts with the following format:

`<LINK_TYPE>?direction=<IN OR OUT>&column=<COLUMN_NAME>&separator=<SEPARATOR>` Examples:

- **`TESTED_BY?column=Test`**

A 'TESTED_BY' link will be created with the UID found in column 'Test'

- **`IMPLEMENTED_BY?direction=IN&column=Implements`**

An 'IMPLEMENTED_BY' link will be created with the UID found in column 'Implements'. Since the optional 'direction' attribute is provided, it will be set as 'IN' (default value is 'OUT')

- **`TESTED_BY?column=Tests&separator=','`**

'TESTED_BY' links will be created with all UIDs found in column 'Tests', separated by a comma

- **`TESTED_BY?column=Tests&separator=',';REFINED_BY?column=DownLinks&separator=','`**

'TESTED_BY' and 'REFINED_BY' links will be created with UIDs found in columns 'Tests' and 'DownLinks' respectively

- **Artefact name (`artefact_name`):** Artefact name as displayed in Squire. Examples:

- `${ID}`
- `T_${Name}`
- `${Name} ${Descr}`

Note: `${NAME}` designates the column called NAME

- **Path to the artefact (`path_list`):** Optional. If not used, artefacts extracted from the Excel file will be directly added to the Squire root.

To specify the path in Squire of artefacts extracted from the Excel file, using the following format:

`*<COLUMN_NAME>?map=[<REGEX_1>:<GROUP_NAME_1>,...
,<REGEX_N>:<GROUP_NAME_N>]&groupByDate=<YES>&format=<dd-mm-YYYY>*`Examples:

- **Area**

Artefacts will be regrouped by the value found in the 'Area' column

- **Area?map=[A*:Area A,B*:Area B]**

Artefacts will be regrouped into two groups: 'Area A', for all values of 'Area' column starting with letter 'A', and 'Area B' for letter 'B'.

- **Started on?groupByDate=Yes&format=YYYY/mm/dd**

Artefacts will be regrouped by the date found in column 'Started on', using the format 'YYYY/mm/dd'

Note: Date patterns are based on SimpleDateFormat Java class specifications.

- **Textual data to extract (`info_list`):** Optional.

To specify the list of textual data to extract from the Excel file, using the following format:

`*<METRIC_ID>?column=<COLUMN_NAME>&map=[<REGEX_1>:<TEXT_1>,...
,<REGEX_N>:<TEXT_N>]*`Examples:

- **ZONE_ID?column=Zone**

Textual data found in column 'Zone' will be associated to metric ZONE_ID

- **ZONE_ID?column=Zone;OWNER?column=Belongs to**

Textual data found in columns 'Zone' and 'Belongs to' will be associated to metric ZONE_ID and OWNER respectively

- **ORIGIN?column=Comes from,map=[Cust*:External,Sub-contractor*:External,Support:Internal,Dev:Internal]**

Textual data found in column 'Comes from' will be associated to metric ORIGIN:

- With value 'External' if the column starts with 'Cust' or 'Sub-contractor'
- With value 'Internal' if the column equals 'Support' or 'Dev'

–

- **Started on?groupByDate=Yes&format=YYYY/mm/dd**

Artefacts will be regrouped by the date found in column 'Started on', using the format 'YYYY/mm/dd'

- **Numerical metrics to extract (metric_list): Optional.**

To specify the list of numerical data to extract from the Excel file, using the following format:

*<METRIC_ID>?column=<COLUMN_NAME>&extract=<REGEX_EXTRACT>&map=[<REGEX_1>:<VALUE_1>,...,<REGEX_N>:<VALUE_N>]*Examples:

- **PRIORITY?column=Priority level**

Numerical values found in column 'Priority level' will be associated to metric PRIORITY

- **SEVERITY?column=Severity level,extract=S_**

Numerical values found in column 'Severity level' will be associated to metric SEVERITY, after having extracted (removed) the string 'S_', because in this example, column 'Severity level' contains for example 'S_1', 'S_4', etc., and we want to obtain '1', '4', etc.

- **STATUS?column=State&map=[passed:0,Passed:0,Pass:0,*nconclusive*:1,failed:2,Failed:2,FAIL:2]**

_Textual values found in column 'State' will be mapped to numerical values using these rules:

- For values containing 'passed', 'Passed', 'Pass'
- For values containing 'nconclusive'
- For values containing 'failed', 'Failed', 'FAIL'

–

- **Date metrics to extract (date_list): Optional.**

To specify the list of date data to extract from the Excel file, using the following format:

*<METRIC_ID>?column=<COLUMN_NAME>&format=<DATE_FORMAT>*Examples:

- **CREATION_DATE?column=Created on**

Date values found in column 'Created on' will be associated to metric CREATION_DATE, using the default dd-MMM-yyyy format

- **LAST_UPDATE?column=Updated on&format=yyyy/mm/dd**

Date values found in column 'Created on' will be associated to metric CREATION_DATE, using the yyyy/mm/dd format

Note:Date patterns are based on SimpleDateFormat Java class specifications.

- **Filters to set the list of artefacts to keep (filter_list): Optional.**

If specified only artefacts complying with the provided filters are kept. Use the following format:

*<COLUMN_NAME>?regex=<REGEX>*Examples:

- **Name?regex=^ST***

Only create artefacts for which column 'Name' starts with 'ST'

- **Name?regex=^ST*;Region?regex=Europe**

Same as before, but restrict to artefacts where column 'Region' is 'Europe'

- **Import data via UID only (`import_data_via_uid_only`, default: `0`):** Specify this option if you want to add metric/info to an artefact which created in another Data Provider
- **Header row index (`initial_row`, default: `0`):** Specify the line number where headers are defined. Note: Indexes start at value '0', e.g. the 4th line has index 3.

The full command line syntax for Excel Import is:

```
-d
"type=import_excel,input_file=[text],sheetname=[text],artefact_type=[text],artefact_type_container=[text],artefact_uid=[text],artefact_link=[text],artefact_name=[text],path_list=[text],info_list=[text],metric_list=[text],date_list=[text],filter_list=[text],import_data_via_uid_only=[text],initial_row=[text]"
```

Memory Data Import

Description

Memory Data Import provides a generic import mechanism for memory data from a CSV or Excel file.

Usage

Memory Data Import has the following options:

- **Root node name (`root_node`, default: `Resources`):** Specify the name of root node in the artefact tree.
- **Data File (`xls_file`):** Specify the path to the file containing Memory information.
- **Sheet Name (`xls_sheetname`):** Specify the name of the Excel sheet that contains the Memory list.
- **Memory Column name (`xls_key`):** Specify the header name of the column which contains the Memory key.
- **Grouping Structure (`xls_groups`):** Specify the headers for Grouping Structure, separated by ";".
- **Filtering (`xls_filters`):** Specify the list of Header for filtering
For example: "`column_name_1=regex1;column_name_2=regex2`;
- **Specify the csv separator (`csv_separator`, default: `;`):** Specify the csv separator
- **Memory size column name (`memory_size_column_name`, default: `Total`):** Specify the header name of the column which contains the memory size.
- **Used memory column name (`memory_used_column_name`, default: `Used`):** Specify the header name of the column which contains the used memory.
- **Memory type column name (`memory_type_column_name`, default: `Type`):** Specify the header name of the column which contains the memory type.

- **ROM memory type name** (`memory_type_rom_name`, **default: ROM**): Specify the name used for ROM memory.
- **RAM memory type name** (`memory_type_ram_name`, **default: RAM**): Specify the name used for RAM memory.
- **NVM memory type name** (`memory_type_nvme_name`, **default: NVM**): Specify the name used for NVM memory.
- **Create an output file** (`createOutput`, **default: true**): Create an output file

The full command line syntax for Memory Data Import is:

```
-d
"type=import_memory,root_node=[text],xls_file=[text],xls_sheetname=[text],xls_key=[text],xls_groups=[text],xls_filters=[text],csv_separator=[text],memory_size_column_name=[text],memory_used_column_name=[text],memory_type_column_name=[text],memory_type_rom_name=[text],memory_type_ram_name=[text],memory_type_nvme_name=[text],createOutput=[booleanChoice]"
```

Requirement Data Import

Description

Requirement Data Import provides a generic import mechanism for requirements from a CSV.



Requirement Data Import provides fields so you can map all your requirements and spread them over the following statuses: Proposed, Analyzed, Approved, Implemented, Verified, Postponed, Deleted, Rejected. Overlapping statuses will cause an error, but if a requirement's status is not declared in the definition, the requirement will still be imported, and a finding will be created.

Usage

Requirement Data Import has the following options:

- **Root Node** (`root_node`, **default: Requirements**): Specify the name of the node to attach requirements to.
- **Data File** (`input_file`): Specify the path to the CSV file containing requirements.
- **Sheet Name** (`xls_sheetname`): Specify the sheet name that contains the requirement list.
- **Requirement ID** (`artefact_id`): Specify the header name of the column which contains the requirement ID.
- **Requirement version** (`version`): Specify the header name of the column which contains the requirement version.
- **Linked Requirements IDs which satisfy this requirement** (`link_satisfied_by`): Specify the header name of the column which contains the requirements IDs which satisfy this requirement.
- **Linked Test ID verifying this requirement** (`link_tested_by`): Specify the header name of the

column which contains the linked test ID verifying this requirement.

- **Linked Ticket ID associated to this requirement (`link_ticket`):** Specify the header name of the column which contains the linked Ticket ID corresponding to an issue or enhancement request.
- **Requirement Name (`artefact_name`):** Specify the pattern used to build the name of the requirement. The name can use any information collected from the CSV file as a parameter.

Example: `${ID} : ${Summary}`

- **Requirement UID (`artefact_uid`):** Specify the pattern used to build the requirement Unique ID. The UID can use any information collected from the CSV file as a parameter.

Example: `TK# ${ID}`

- **Grouping Structure (`artefact_groups`):** Specify the headers for Grouping Structure, separated by ";".

For example: `"column_name_1=regex1;column_name_2=regex2;`

- **Filtering (`artefact_filters`):** Specify the list of Header for filtering

For example: `"column_name_1=regex1;column_name_2=regex2;`

- **Applicable Requirement Pattern (`definition_applicable`):** Specify the pattern applied to define requirements as Applicable. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Applicable=Yes`

- **Proposed Requirement Pattern (`definition_proposed`):** Specify the pattern applied to define requirements as proposed. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Status=Proposed`

- **Analyzed Requirement Pattern (`definition_analyzed`):** Specify the pattern applied to define requirements as analyzed. This field accepts a regular expression to match one or more column headers with a list of possible values.

Examples:

- `Status=Analyzed`
- `Status=[Analyzed|Introduced]`
- `Status=Analyzed;Decision=[final;revised]`

- **Approved Requirement Pattern (`definition_approved`):** Specify the pattern applied to define requirements as approved. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Status=Proposed`

- **Implemented Pattern (`definition_implemented`):** Specify the pattern applied to define requirements as Implemented. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Status=Implemented`

- **Verified Requirement Pattern (`definition_verified`):** Specify the pattern applied to define requirements as Verified. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Status=Verified**

- **Postponed Requirement Pattern (definition_postponed)**: Specify the pattern applied to define requirements as Postponed. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Status=postponed**

- **Deleted Requirement Pattern (definition_deleted)**: Specify the pattern applied to define requirements as deleted. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Status=Deleted**

- **Rejected Requirement Pattern (definition_rejected)**: Specify the pattern applied to define requirements as rejected. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Status=Rejected**

- **'Very high' Requirement priority Pattern (definition_priority_very_high)**: Specify the pattern applied to define requirements priority as 'Very High' (usually associated to value '1'). This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Priority=1**

- **'High' Requirement priority Pattern (definition_priority_high)**: Specify the pattern applied to define requirements priority as 'High' (usually associated to value '2'). This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Priority=2**

- **'Medium' Requirement priority Pattern (definition_priority_medium)**: Specify the pattern applied to define requirements priority as 'Medium' (usually associated to value '3'). This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Priority=3**

- **'Low' Requirement priority Pattern (definition_priority_low)**: Specify the pattern applied to define requirements priority as 'Low' (usually associated to value '4'). This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Priority=4**

- **'Met' Compliance Pattern (definition_met)**: Specify the pattern applied to define requirement Compliance as 'Met'. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Compliance=Met**

- **'Partially Met' Compliance Pattern (definition_partially_met)**: Specify the pattern applied to define requirement Compliance as 'Partially Met'. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Compliance=Partially Met**

- **'Not Met' Compliance Pattern (definition_not_met)**: Specify the pattern applied to define requirement Compliance as 'Not Met'. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Compliance=Not Met**

- **'Inspection' Test Method Pattern (definition_inspection):** Specify the pattern applied to define requirement Test method as 'Inspection'. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **IADT Method=Inspection**

- **'Analysis' Test Method Pattern (definition_analysis):** Specify the pattern applied to define requirement Test method as 'Analysis'. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **IADT Method=Analysis**

- **'Demonstration' Test Method Pattern (definition_demonstration):** Specify the pattern applied to define requirement Test method as 'Demonstration'. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **IADT Method=Demonstration**

- **'Test' Test Method Pattern (definition_test):** Specify the pattern applied to define requirement Test method as 'Test'. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **IADT Method=Test**

- **Creation Date Column (creation_date):** Enter the name of the column containing the creation date of the requirement.

Accepted formats [are detailed here](#).

- **Last Update Column (last_updated):** Enter the name of the column containing the last modification date of the requirement.

Accepted formats [are detailed here](#).

- **URL (url):** Specify the pattern used to build the requirement URL. The URL can use any information collected from the CSV file as a parameter.

Example: [https://example.com/bugs/\\${ID}](https://example.com/bugs/${ID})

- **Description Column (description):** Specify the header of the column containing the description of the requirement.

- **Priority Column (priority):** Specify the header of the column containing priority data.

- **'A' critical factor Pattern (definition_crit_factor_A):** Specify the pattern applied to define requirement critical factor as 'A' (low). This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Criticality=A**.

- **'B' critical factor Pattern (definition_crit_factor_B):** Specify the pattern applied to define requirement critical factor as 'B' (medium). This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Criticality=B**.

- **'C' critical factor Pattern (definition_crit_factor_C):** Specify the pattern applied to define requirement critical factor as 'C' (high). This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Criticity=C**.

- **'D' critical factor Pattern (definition_crit_factor_D)**: Specify the pattern applied to define requirement critical factor as 'D' (highest). This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Criticity=D**.

- **CSV Separator (csv_separator)**: Specify the character used in the CSV file to separate columns.
- **Information Fields (informations)**: Specify the list of extra textual information to import from the CSV file. This parameter expects a list of headers separated by ";" characters.

For example: **Company;Country;Resolution**

- **Save Output (createOutput)**:

The full command line syntax for Requirement Data Import is:

```
-d
"type=import_req,root_node=[text],input_file=[text],xls_sheetname=[text],artefact_id=[
text],version=[text],link_satisfied_by=[text],link_tested_by=[text],link_ticket=[text]
,artefact_name=[text],artefact_uid=[text],artefact_groups=[text],artefact_filters=[tex
t],definition_applicable=[text],definition_proposed=[text],definition_analyzed=[text],
definition_approved=[text],definition_implemented=[text],definition_verified=[text],de
finition_postponed=[text],definition_deleted=[text],definition_rejected=[text],definit
ion_priority_very_high=[text],definition_priority_high=[text],definition_priority_medi
um=[text],definition_priority_low=[text],definition_met=[text],definition_partially_me
t=[text],definition_not_met=[text],definition_inspection=[text],definition_analysis=[t
ext],definition_demonstration=[text],definition_test=[text],creation_date=[text],last_
updated=[text],url=[text],description=[text],priority=[text],definition_crit_factor_A=
[text],definition_crit_factor_B=[text],definition_crit_factor_C=[text],definition_crit
_factor_D=[text],csv_separator=[text],informations=[text],createOutput=[booleanChoice]
"
```

Stack Data Import

Description

Stack Data Import provides a generic import mechanism for stack data from a CSV or Excel file.

Usage

Stack Data Import has the following options:

- **Root node name (root_node, default: Resources)**: Specify the name of root node in the artefact tree.
- **Data File (xls_file)**: Specify the path to the file containing Stack information.
- **Sheet Name (xls_sheetname)**: Specify the sheetname that contains the Stack list.

- **Stack Column name (xls_key):** Specify the header name of the column which contains the Stack key.
- **Grouping Structure (xls_groups):** Specify the headers for Grouping Structure, separated by ";".
- **Filtering (xls_filters):** Specify the list of Header for filtering
For example: "column_name_1=regex1;column_name_2=regex2;"
- **Specify the csv separator (csv_separator, default: ;):** Specify the csv separator
- **Stack size column (stack_size_column_name, default: Stack Size [Bytes]):** Specify the name of the column of Stack Size
- **Stack Average column (stack_average_column_name, default: Average Stack Size used [Bytes]):** Specify the name of the column of Stack Average
- **Stack Worst column (stack_worst_column_name, default: Worse Case Stack Size used [Bytes]):** Specify the name of the column of Stack Worst
- **Create an output file (createOutput, default: true):** Create an output file

The full command line syntax for Stack Data Import is:

```
-d
"type=import_stack,root_node=[text],xls_file=[text],xls_sheetname=[text],xls_key=[text
],xls_groups=[text],xls_filters=[text],csv_separator=[text],stack_size_column_name=[te
xt],stack_average_column_name=[text],stack_worst_column_name=[text],createOutput=[bool
eanChoice]"
```

Test Data Import

Description

Test Data Import provides a generic import mechanism for tests from a CSV, Excel or JSON file. Additionally, it generates findings when the imported tests have an unknown status or type.



This Data Provider provides fields so you can map all your tests and spread them over the following statuses: Failed, Inconclusive, Passd. Overlapping statuses and types will cause an error, but if a test status is not declared in the definition, the test will still be imported, and a finding will be created.

Usage

Test Data Import has the following options:

- **Root Node (root_node, default: Tests):** Specify the name of the node to attach tests to.
- **Data File (input_file):** Specify the path to the CSV, Excel or JSON file containing tests.
- **Excel Sheet Name (xls_sheetname):** Specify the sheet name that contains the test list if your import file is in Excel format.
- **TestID (artefact_id):** Specify the header name of the column which contains the test ID.

- **Linear Index Column (`linear_idx`):** Specify the column name of the Linear Index (=Linear Index is used to order unit or integration tests in matrix graph).
- **Test Name (`artefact_name`):** Specify the pattern used to build the name of the test. The name can use any information collected from the CSV file as a parameter.

Example: `${ID} : ${Summary}`

- **Test UID (`artefact_uid`):** Specify the pattern used to build the test Unique ID. The UID can use any information collected from the CSV file as a parameter.

Example: `TST#${ID}`

- **Grouping Structure (`artefact_groups`):** Specify the headers for Grouping Structure, separated by ";".

For example: `"column_name_1=regex1;column_name_2=regex2;`

- **Filtering (`artefact_filters`):** Specify the list of Header for filtering

For example: `"column_name_1=regex1;column_name_2=regex2;`

- **Failed Test Pattern (`definition_failed`):** Specify the pattern applied to define tests as failed. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Status=Failed`

- **Inconclusive Test Pattern (`definition_inconclusive`):** Specify the pattern applied to define tests as inconclusive. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Status=[Inconclusive|Unfinished]`

- **Passed Test Pattern (`definition_passed`):** Specify the pattern applied to define tests as passed. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Status=Passed`

- **Date when the test was executed (`execution_date`):** Enter the name of the column containing the execution date of the test.

Accepted formats [are detailed here](#).

- **Unit of test duration (`execution_duration_unit`, `default: ms`):** Enter the unit used for the test duration. Possible values are 's' (seconds) or 'ms' (milliseconds), default is 'ms')

- **Duration of the test (`execution_duration`):** Enter duration of the test, in milliseconds.

- **TODO Pattern (`in_todo_list`):** Specify the pattern applied to include tests in the TODO list. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Active=Yes`

- **Creation Date Column (`creation_date`):** Enter the name of the column containing the creation date of the test.

Accepted formats [are detailed here](#).

- **Last Updated Date Column (`last_updated_date`):** Enter the name of the column containing the

last updated date of the test.

Accepted formats [are detailed here](#).

- **URL (`url`):** Specify the pattern used to build the test URL. The URL can use any information collected from the CSV file as a parameter.

Example: **`https://example.com/tests/${ID}`**

- **Description Column (`description`):** Specify the header of the column containing the description of the test.
- **Category Column (`category`):** Specify the header of the column containing the category of the test.
- **Priority Column (`priority`):** Specify the header of the column containing priority data.
- **CSV Separator (`csv_separator`):** Specify the character used in the CSV file to separate columns.
- **Information Fields (`informations`):** Specify the list of extra textual information to import from the CSV file. This parameter expects a list of headers separated by ";" characters.

For example: **`Architecture;Responsible;Target`**

- **Save Output (`createOutput`):**

The full command line syntax for Test Data Import is:

```
-d
"type=import_test,root_node=[text],input_file=[text],xls_sheetname=[text],artefact_id=[text],linear_idx=[text],artefact_name=[text],artefact_uid=[text],artefact_groups=[text],artefact_filters=[text],definition_failed=[text],definition_inconclusive=[text],definition_passed=[text],execution_date=[text],execution_duration_unit=[multipleChoice],execution_duration=[text],in_todo_list=[text],creation_date=[text],last_updated_date=[text],url=[text],description=[text],category=[text],priority=[text],csv_separator=[text],informations=[text],createOutput=[booleanChoice]"
```

Ticket Data Import

Description

Ticket Data Import provides a generic import mechanism for tickets from a CSV, Excel or JSON file. Additionally, it generates findings when the imported tickets have an unknown status or type.



This Data Provider provides fields so you can map all your tickets as Enhancements and defects and spread them over the following statuses: Open, In Implementation, In Verification, Closed. Overlapping statuses and types will cause an error, but if a ticket's type or status is not declared in the definition, the ticket will still be imported, and a finding will be created.

Usage

Ticket Data Import has the following options:

- **Root Node (`root_node`, default: `Tickets`):** Specify the name of the node to attach tickets to.
- **Data File (`input_file`):** Specify the path to the CSV, Excel or JSON file containing tickets.
- **Excel Sheet Name (`xls_sheetname`):** Specify the sheet name that contains the ticket list if your import file is in Excel format.
- **Ticket ID (`artefact_id`):** Specify the header name of the column which contains the ticket ID.
- **Ticket Name (`artefact_name`):** Specify the pattern used to build the name of the ticket. The name can use any information collected from the CSV file as a parameter.

Example: `${ID} : ${Summary}`

- **Ticket UID (`artefact_uid`):** Specify the pattern used to build the ticket Unique ID. The UID can use any information collected from the CSV file as a parameter.

Example: `TK# ${ID}`

- **Grouping Structure (`artefact_groups`):** Specify the headers for Grouping Structure, separated by ";".

For example: `"column_name_1=regex1;column_name_2=regex2;`

- **Filtering (`artefact_filters`):** Specify the list of Header for filtering

For example: `"column_name_1=regex1;column_name_2=regex2;`

- **Open Ticket Pattern (`definition_open`):** Specify the pattern applied to define tickets as open. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Status=[Open|New]`

- **In Development Ticket Pattern (`definition_rd_progress`):** Specify the pattern applied to define tickets as in development. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Status=Implementing`

- **Fixed Ticket Pattern (`definition_vv_progress`):** Specify the pattern applied to define tickets as fixed. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Status=Verifying;Resolution=[fixed;removed]`

- **Closed Ticket Pattern (`definition_close`):** Specify the pattern applied to define tickets as closed. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Status=Closed`

- **Defect Pattern (`definition_defect`):** Specify the pattern applied to define tickets as defects. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Type=Bug`

- **Enhancement Pattern (`definition_enhancement`):** Specify the pattern applied to define tickets as enhancements. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Type=Enhancement**

- **TODO Pattern (`in_todo_list`):** Specify the pattern applied to include tickets in the TODO list. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Sprint=2018-23**

- **Creation Date Column (`creation_date`):** Enter the name of the column containing the creation date of the ticket.

Accepted formats [are detailed here](#).

- **Due Date Column (`due_date`):** Enter the name of the column containing the due date of the ticket.

Accepted formats [are detailed here](#).

- **Last Updated Date Column (`last_updated_date`):** Enter the name of the column containing the last updated date of the ticket.

Accepted formats [are detailed here](#).

- **Closure Date Column (`closure_date`):** Enter the name of the column containing the closure date of the ticket.

Accepted formats [are detailed here](#).

- **URL (`url`):** Specify the pattern used to build the ticket URL. The URL can use any information collected from the CSV file as a parameter.

Example: [https://example.com/bugs/\\${ID}](https://example.com/bugs/${ID})

- **Description Column (`description`):** Specify the header of the column containing the description of the ticket.

- **Category Column (`category`):** Specify the header of the column containing the category of the ticket.

- **Reporter Column (`reporter`):** Specify the header of the column containing the reporter of the ticket.

- **Handler Column (`handler`):** Specify the header of the column containing the handler of the ticket.

- **Priority Column (`priority`):** Specify the header of the column containing priority data.

- **Severity Column (`severity`):** Specify the header of the column containing severity data.

- **CSV Separator (`csv_separator`):** Specify the character used in the CSV file to separate columns.

- **Information Fields (`informations`):** Specify the list of extra textual information to import from the CSV file. This parameter expects a list of headers separated by ";" characters.

For example: **Company;Country;Resolution**

- **Save Output (`createOutput`):**

The full command line syntax for Ticket Data Import is:

```
-d
"type=import_ticket,root_node=[text],input_file=[text],xls_sheetname=[text],artefact_id=[text],artefact_name=[text],artefact_uid=[text],artefact_groups=[text],artefact_filters=[text],definition_open=[text],definition_rd_progress=[text],definition_vv_progress=[text],definition_close=[text],definition_defect=[text],definition_enhancement=[text],in_todo_list=[text],creation_date=[text],due_date=[text],last_updated_date=[text],closure_date=[text],url=[text],description=[text],category=[text],reporter=[text],handler=[text],priority=[text],severity=[text],csv_separator=[text],informations=[text],createOutput=[booleanChoice]"
```

Jira

Description

This Data Provider extracts tickets and their attributes from a Jira instance to create ticket artefacts in your project.

For more details, refer to <https://www.atlassian.com/software/jira>.



The extracted JSON from Jira is then passed to the Ticket Data Import Data Provider (described in [Ticket Data Import](#)). Finer configuration of the data passed from this Data Provider to Ticket Data Import is available by editing (or overriding) `<SQUORE_HOME>/addons/tools/jira/jira_config.xml`.

Usage

Jira has the following options:

- **Jira REST API URL (`url`, mandatory):** The URL used to connect to your Jira instance's REST API URL (e.g: <https://jira.domain.com/rest/api/2>)
- **Jira User login (`login`, mandatory):** Specify your Jira User login.
- **Jira User password (`pwd`, mandatory):** Specify your Jira User password.
- **Number of queried tickets (`max_results`, mandatory, default: -1):** Maximum number of queried tickets returned by the query (default is -1, meaning 'retrieve all tickets').
- **Additional Fields (`additional_fields`, default: `environment,votes`):** List additional fields to be exported from Jira.

This field accepts a comma-separated list of field names that are added to the export request URL, for example `fixVersions,versions`

- **Grouping Structure (`artefact_groups`, default: `fields/components[0]/name`):** Specify the headers for Grouping Structure, separated by ";".

For example: `"column_name_1=regex1;column_name_2=regex2;`

- **Creation Date Field (`creation_date`, default: `fields/created`):** Enter the name of the column containing the creation date of the ticket.

For example: `column_name{format="dd/mm/yyyy"}`).

If format is not specified, the following is used by default: `dd/mm/yyyy`.

- **Closure Date Field** (`closure_date`, default: `fields/resolutiondate`): Enter the name of the column containing the closure date of the ticket.

For example: `column_name{format="dd/mm/yyyy"}`).

If format is not specified, the following is used by default: `dd/mm/yyyy`.

- **Due Date Field** (`due_date`, default: `fields/duedate`): Enter the name of the column containing the due date of the ticket.

For example: `column_name{format="dd/mm/yyyy"}`).

If format is not specified, the following is used by default: `dd/mm/yyyy`.

- **Last Updated Date Field** (`last_updated_date`, default: `fields/updated`): Enter the name of the column containing the last updated date of the ticket.

For example: `column_name{format="dd/mm/yyyy"}`).

If format is not specified, the following is used by default: `dd/mm/yyyy`.

- **Category** (`category`, default: `fields/components[0]/name`): Specify the path to the field that will contain the ticket category.

- **Priority** (`priority`, default: `fields/priority/name`): Specify the path to the field that will contain the ticket priority.

- **JQL Request** (`jql_request`): Specify a JQL request (see JIRA documentation) in order to limit the number of elements sent by the JIRA server.

For example: `project=MyProject`. This parameter is optional.

- **Filtering** (`artefact_filters`, default: `fields/issuetype/name=(Task|Bug|Improvement|New Feature)`): Specify the list of Header for filtering

For example: `"column_name_1=regex1;column_name_2=regex2"`;

- **Information Fields** (`informations`, default: `fields/environment;fields/votes/votes`): Specify a semicolon-separated list of paths to fields you want to extract from the Jira JSON export to be added as textual information for the ticket artefacts.

For example: `fields/fixVersions[0]/name;fields/versions[0]/name`

- **Open Ticket Pattern** (`definition_open`, default: `fields/status/name=[To Do|Open|Reopened]`): Specify the pattern applied to define tickets as open. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Status=[Open|New]`

- **In Development Ticket Pattern** (`definition_rd_progress`, default: `fields/status/name=[In Progress|In Review]`): Specify the pattern applied to define tickets as in development. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: `Status=Implementing`

- **Fixed Ticket Pattern** (`definition_vv_progress`, default: `fields/status/name=[Verified]`): Specify the pattern applied to define tickets as fixed. This field accepts a regular expression to match

one or more column headers with a list of possible values.

Example: **Status=Verifying;Resolution=[fixed;removed]**

- **Closed Ticket Pattern (definition_close, default: fields/status/name=[Resolved|Closed|Done]):** Specify the pattern applied to define tickets as closed. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Status=Closed**

- **Defect Pattern (definition_defect, default: fields/issuetype/name=[Bug]):** Specify the pattern applied to define tickets as defects. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Type=Bug**

- **Enhancement Pattern (definition_enhancement, default: fields/issuetype/name=[Improvement|New Feature]):** Specify the pattern applied to define tickets as enhancements. This field accepts a regular expression to match one or more column headers with a list of possible values.

Example: **Type=Enhancement**

- **Todo list regex (in_todo_list, default: fields/status/name=.*):** Todo list regex (ticket which fit the regex will be considered as part of the TODO list for the analysis)

The full command line syntax for Jira is:

```
-d
"type=jira,url=[text],login=[text],pwd=[password],max_results=[text],additional_fields
=[text],artefact_groups=[text],creation_date=[text],closure_date=[text],due_date=[text
],last_updated_date=[text],category=[text],priority=[text],jql_request=[text],artefact
_filters=[text],informations=[text],definition_open=[text],definition_rd_progress=[tex
t],definition_vv_progress=[text],definition_close=[text],definition_defect=[text],defi
nition_enhancement=[text],in_todo_list=[text]"
```

Mantis

Description

The Mantis Data Provider extracts tickets and their attributes from a Mantis installation and creates ticket artefacts.

Prerequisites:

- This Data Provider queries Mantis tickets using the Mantis BT REST API. An **API token** is required to access this API.
- The Mantis server should be configured to avoid filtering 'Authorization' headers.

See <http://docs.php.net/manual/en/features.http-auth.php#114877> for further details.

For more details, refer to <https://www.mantisbt.com>.



The extracted JSON from Mantis BT is then passed to the Ticket Data Import Data Provider (described in [Ticket Data Import](#)). Finer configuration of the data passed from this Data Provider to Ticket Data Import is available by editing (or overriding) `<SQUORE_HOME>/addons/tools/mantis/mantis_config.xml`.

Usage

Mantis has the following options:

- **Mantis URL (`url`, mandatory):** Specify the URL of the Mantis instance (e.g: <https://www.mantisbt.org/bugs/api/rest>)
- **Mantis API Token (`api_token`, mandatory):** Copy the Mantis API Token generated from your Account Settings in Mantis.
- **Number of queried tickets (`max_results`, mandatory, default: 50):** Maximum number of queried tickets returned by the query (default is 50. value=-1 means 'retrieve all tickets').

The full command line syntax for Mantis is:

```
-d "type=mantis,url=[text],api_token=[text],max_results=[text]"
```

OSLC

Description

OSLC-CM allows retrieving information from Change Management systems following the OSLC standard. Metrics and artefacts are created by connecting to the OSLC system and retrieving issues with the specified query.

For more details, refer to <http://open-services.net/>.

Usage

OSLC has the following options:

- **Change Server (`server`):** Specify the URL of the project you want to query on the OSLC server. Typically the URL will look like this: <http://myserver:8600/change/oslc/db/3454a67f-656ddd4348e5/role/User/>
- **Query (`query`):** Specify the query to send to the OSLC server (e.g.: `release="9TDE/TDE_00_01_00_00"`). It is passed to the request URL via the `?oslc_cm.query=` parameter.
- **Query Properties (`properties`, default: `request_type,problem_number,crstatus,severity,submission_area,functionality...`):** Specify the properties to add to the query. They are passed to the OSLC query URL using the `?oslc_cm.properties=` parameter.
- **Login (`login`):**
- **Password (`password`):**

The full command line syntax for OSLC is:


```
-d "type=oslc_cm,server=[text],query=[text],properties=[text],login=[text],password=[password]"
```

pep8

Description

pep8 is a tool to check your Python code against some of the style conventions in PEP 88. Its CSV report file is imported to generate findings.

For more details, refer to <https://pypi.python.org/pypi/pep8>.

Usage

pep8 has the following options:

- **CSV results file (csv):** Specify the path to the CSV report file created by pep8.

The full command line syntax for pep8 is:

```
-d "type=pep8,csv=[text]"
```

pycodestyle / pep8 (plugin)

Description

Style Guide for Python Code. Pep8 results are imported to produce findings on Python code. This data provider requires having pycodestyle or pep8 installed on the machine running the analysis and the pycodestyle or pep8 command to be available in the path. It is compatible with pycodestyle 2.4 or pep8 1.7 and may also work with older versions.

For more details, refer to <https://pypi.org/project/pycodestyle>.

Usage

pycodestyle / pep8 (plugin) has the following options:

- **Source code directory to analyse (dir):** Leave this field empty to analyse all sources.

The full command line syntax for pycodestyle / pep8 (plugin) is:

```
-d "type=pep8_auto,dir=[text]"
```

PHP Code Coverage

Description

Library that provides collection, processing, and rendering functionality for PHP code coverage information.

For more details, refer to <https://github.com/sebastianbergmann/php-code-coverage>.

Usage

PHP Code Coverage has the following options:

- **Report Folder (`html_report`):** Specify the path to the HTML report folder which contains the coverage results.

The full command line syntax for PHP Code Coverage is:

```
-d "type=phpcodecoverage,html_report=[text]"
```

pylint

Description

Pylint is a Python source code analyzer which looks for programming errors, helps enforcing a coding standard and sniffs for some code smells (as defined in Martin Fowler's Refactoring book). Pylint results are imported to generate findings for Python code.

For more details, refer to <http://www.pylint.org/>.

Usage

pylint has the following options:

- **CSV results file (`csv`):** Specify the path to the CSV file containing pylint results. Note that the minimum version supported is 1.1.0.

The full command line syntax for pylint is:

```
-d "type=pylint,csv=[text]"
```

pylint (plugin)

Description

Coding Guide for Python Code. Pylint results are imported to produce findings on Python code. This data provider requires having pylint installed on the machine running the analysis and the pylint command to be available in the path. It is known to work with pylint 1.7.0 and may also work with older versions.

Usage

pylint (plugin) has the following options:

- **Source code directory to analyse (dir):** Leave this field empty to analyse all sources.

The full command line syntax for pylint (plugin) is:

```
-d "type=pylint_auto,dir=[text]"
```

QAC 8.2

Description

QA-C is a static analysis tool for MISRA checking.

For more details, refer to <http://www.programmingresearch.com/static-analysis-software/qac-qacpp-static-analyzers/>.

Usage

QAC 8.2 has the following options:

- **QAC output file(s) (txt, mandatory):** Specify the path(s) to the .tab file(s) to extract findings from. To provide multiple files click on '+'
- **Eliminate duplicated findings (eliminate_duplicate, default: false):** When 2 occurrences of the same finding (same rule, same file, same line, same description) is found, only one is reported.

The full command line syntax for QAC 8.2 is:

```
-d "type=qac,txt=[text],eliminate_duplicate=[booleanChoice]"
```

QAC 8.2 CERT Import

Description

QA-C is a static analysis tool for MISRA and CERT checking.

For more details, refer to <http://www.programmingresearch.com/static-analysis-software/qac-qacpp-static-analyzers/>.

Usage

QAC 8.2 CERT Import has the following options:

- **QAC CERT output file(s) (txt, mandatory):** Specify the path(s) to the .tab file(s) to extract findings from. To provide multiple files click on '+'
- **Eliminate duplicated findings (eliminate_duplicate, default: false):** When 2 occurrences of the

same finding (same rule, same file, same line, same description) is found, only one is reported.

The full command line syntax for QAC 8.2 CERT Import is:

```
-d "type=qac_cert,txt=[text],eliminate_duplicate=[booleanChoice]"
```

SonarQube

Description

This data provider imports findings from SonarQube. Note that versions prior to 6.2 may not be supported.

For more details, refer to <https://www.sonarqube.org/>.

Usage

SonarQube has the following options:

- **SonarQube Location (sonar, default: <http://127.0.0.1:9000>)**: Specify the URL of the SonarQube installation to work with (for example: <http://localhost:9000>)
- **SonarQube Component Key (key)**:
- **Version Name (version)**:
- **Login (login)**:
- **Password (password)**:

The full command line syntax for SonarQube is:

```
-d  
"type=sonarqube,sonar=[text],key=[text],version=[text],login=[text],password=[password  
]"
```

Testwell CTC++

Description

Import data from Testwell CTC++ xml results

For more details, refer to <http://www.testwell.fi/ctcdesc.html>.

Usage

Testwell CTC++ has the following options:

- **Results folder (dir)**: Specify the folder containing XML test results files from Testwell CTC++.

The full command line syntax for Testwell CTC++ is:

```
-d "type=testwell_ctc,dir=[text]"
```

vTestStudio

Description

Import data from vTestStudio xml test report

For more details, refer to <https://www.vector.com/int/en/products/products-a-z/software/vteststudio/>.

Usage

vTestStudio has the following options:

- **Results folder (dir):** Specify the folder containing XML test report files from vTestStudio.
- **File suffix of reports (suff, default: .vti-tso):** Provide the suffix of vTestStudio test reports files.
- **Requirement default status (default_status, default: VERIFIED):** Provide the default status for requirement

The full command line syntax for vTestStudio is:

```
-d "type=vTestStudio,dir=[text],suff=[text],default_status=[multipleChoice]"
```

Adding More Languages to Squan Sources

Squan Sources can handle files written in languages that are not officially supported with a bit of extra configuration. In this mode, only a basic analysis of the file is carried out so that an artefact is created in the project and findings can be attached to it. A subset of the base metrics from Squan Sources is optionally recorded for the artefact so that line counting, stability and text duplication metrics are available at file level for the new language.

The example below shows how you can add TypeScript files to your analysis:

1. Copy `<SQUORE_HOME>/configuration/tools/SQuORE/form.xml` and its `.properties` files into your own configuration
2. Edit `form.xml` to add a new language key and associated file extensions:

```
<?xml version="1.0" encoding="UTF-8"?>
<tags baseName="SQuORE" ...>
  <tag type="multipleChoice" key="languages" ... defaultValue="...;typescript">
    ...
    <value key="typescript" option=".ts,.TS" />
  </tag>
</tags>
```

Files with extensions matching the **typescript** language will be added to your project as `TYPESCRIPT_FILE` artefacts

3. Edit the `defaultValue` of the `additional_param` field to specify how Squan Sources should count source code lines and comment lines in the new language, based on another language officially supported by Squore. This step is optional, and is only needed if you want the to record basic line counting metrics for the artefacts.

```
<?xml version="1.0" encoding="UTF-8"?>
<tags baseName="SQuORE" ...>
  ...
  <tag type="text" key="additional_param" defaultValue="typescript=javascript" />
  ...
</tags>
```

Lines in TypeScript files will be counted as they would for Javascript code.

4. Add translations for the new language key to show in the web UI in Squan Sources's `form_en.properties`

```
OPT.typescript.NAME=TypeScript
```

5. Add translations for the new artefact type and new LANGUAGE information value in one of the properties files imported by your Description Bundle:

```
T.TYPESCRIPT_FILE.NAME=TypeScript File

INFO_VALUE.LANGUAGE.TYPESCRIPT.NAME=Typescript
INFO_VALUE.LANGUAGE.TYPESCRIPT.COLOR=#2b7489
```

6. The new artefact type should also be declared as a type in your model. The easiest way to do this is to add it to the **GENERIC_FILE** alias in your analysis model, which is pre-configured to record the line counting metrics for new artefacts. You should also define a root indicator for you new artefact type. The following snippet shows a minimal configuration using a dummy indicator:

```

<!-- <configuration>/MyModel/Analysis/Bundle.xml -->
<?xml version="1.0" encoding="UTF-8"?>
<Bundle>
...
  <ArtefactType id="GENERIC_FILE" heirs="TYPESCRIPT_FILE" />

  <RootIndicator artefactTypes="TYPESCRIPT_FILE" indicatorId="DUMMY" />
  <Indicator indicatorId="DUMMY" scaleId="SCALE_INFO" targetArtefactTypes=
"TYPESCRIPT_FILE" displayTypes="IMAGE" />

  <Measure measureId="DUMMY">
    <Computation targetArtefactTypes="TYPESCRIPT_FILE" result="0" />
  </Measure>
...
</Bundle>

```



Make sure that this declaration appears in your analysis model before the inclusion of *import.xml* so it overrides the default analysis model.

Don't forget to add translations for your dummy indicator to avoid warnings in the Model Validator:


```

DUMMY.NAME= Generic Indicator
DUMMY.DESCR= This is an indicator for additional languages in Squan Sources. It
does not rate files in any way.

```

7. Reload your configuration and analyse a project, checking the box for TypeScript in Squan Sources's options to get Typescript artefacts in your project.

 SQuAN Sources

Languages	<input type="checkbox"/> ABAP	<input type="text" value=".abap,.ABAP"/>	
	<input checked="" type="checkbox"/> Ada	<input type="text" value=".adb,.ADB,.ada,.ADA,.ads,.ADS,.adi,.ADI"/>	
	<input checked="" type="checkbox"/> C	<input type="text" value=".c,.C"/>	
	<input checked="" type="checkbox"/> C++	<input type="text" value=".cpp,.CPP,h,.H"/>	
	<input type="checkbox"/> MindC	<input type="text" value=".mindc,.MINDC"/>	
	<input checked="" type="checkbox"/> C#	<input type="text" value=".cs,.CS,.cscript,.CSCRIPT"/>	
	<input checked="" type="checkbox"/> Cobol	<input type="text" value=".cbl,.CBL,.cob,.COB,.cbx,.CBX,.cpy,.CPY"/>	
	<input checked="" type="checkbox"/> Java	<input type="text" value=".java,.JAVA"/>	
	<input type="checkbox"/> JavaScript	<input type="text" value="js,.JS"/>	
	<input checked="" type="checkbox"/> Fortran77	<input type="text" value=".f,.F,.f77,.F77,.for,.FOR"/>	
	<input checked="" type="checkbox"/> Fortran90	<input type="text" value=".f95,.F95,.f90,.F90,.f03,.F03,.f08,.F08"/>	
	<input type="checkbox"/> Objective-C	<input type="text" value=".m,.M,.mm,.MM,.c,.C,.h,.H"/>	
	<input checked="" type="checkbox"/> PHP	<input type="text" value=".php,.PHP,.php5,.PHP5"/>	
	<input type="checkbox"/> PL/SQL	<input type="text" value=".sql,.SQL"/>	
	<input checked="" type="checkbox"/> Python	<input type="text" value=".py,.PY"/>	
	<input type="checkbox"/> TSQL	<input type="text" value=".tsql,.TSQL"/>	
	<input checked="" type="checkbox"/> TypeScript	<input type="text" value=".ts,.TS"/>	
	<input checked="" type="checkbox"/> VB.NET	<input type="text" value=".vb,.VB"/>	
	<input type="checkbox"/> Xaml	<input type="text" value=".xaml,.XAML"/>	

The new option for TypeScript files in Squan Sources

If you are launching an analysis from the command line, use the language key defined in step 2 to analyse TypeScript files:



```
-d
"type=SQuORE, languages=typescript, additional_param=typescript=javascript"
```

- After the analysis finishes and you can see your artefacts in the tree, use the Dashboard Editor to build a dashboard for your new artefact type.
- Finally, create a handler for the source code viewer to display your new file type into your configuration folder, by copying `<SQUORE_HOME>/configuration/sources/javascript_file.properties` into your own configuration as `<SQUORE_HOME>/configuration/sources/typescript_file.properties`.

Advanced COBOL Parsing

By default, Squan Sources generates artefacts for all PROGRAMs in COBOL source files. It is possible to configure the parser to also generate artefacts for all SECTIONS and PARAGRAPHS in your source code. This feature can be enabled with the following steps:

1. Open
`<SQUORE_HOME>/configuration/tools/SQuORE/Analyzer/artifacts/cobol/ArtifactsList.txt`
2. Edit the list of artefacts to generate and add the section and paragraph types:

```
program
section
paragraph
```

3. Save your changes

If you create a new project, you will see the new artefacts straight away. For already-existing projects, make sure to launch a new analysis and check Squan Sources's **Force full analysis** option to parse the entire code again and generate the new artefacts.

Using Data Provider Input Files From Version Control

Input files for Squire's Data Providers, like source code, can be located in your version control system. When this is the case, you need to specify a variable in the input field for the Data Provider instead of an absolute path to the input file.

▼ Specify Repository Locations

Folder Zip Upload ClearCase Git PTC Integrity Perforce SVN Synergy TFS ⓘ

Datapath * ⓘ

Add repository

▶ Select Data Providers

▼ Cppcheck



Cppcheck XML results ⓘ

A Data Provider using an input file extracted from a remote repository

The variable to use varies depending on your scenario:

- **You have only one node of source code in your project**

In this case, the variable to use is **\$src**.

- **You have more than one node of source code in your project**

In this case, you need to tell Squire in which node the input file is located. This is done using a variable that has the same name as the alias you defined for the source code node in the previous step of the wizard. For example, if your nodes are labelled *Node1* and *Node2* (the default names), then you can refer to them using the **\$Node1** and **\$Node2** variables.



When using these variables from the command line on a linux system, the \$ symbol must be escaped:

```
-d "type=PMD,configFile=\$src/pmd_data.xml"
```

Providing a catalog file to a Data Provider for Offline XSL Transformations

When transforming an XML results file with an XSL stylesheet, the XML parser used by Squire will try to validate the XML file against the DTD declared in the XML header. In cases where the XSL transformation is running on a machine with no internet access, this can result in the execution of the Data Provider failing with a *No route to host* error message.

You can fix this issue by modifying the data provider to use a catalog file that will provide an alternate location for the DTD used to validate the XML. This feature can be used by all Data Providers that include an XSL transformation [1: The list includes:] .

The following example adds this functionality to the Cobertura Data Provider:

1. Add a catalog.xml file in the Data Provider's configuration folder:

```
<configuration>/tools/cobertura/catalog.xml:  
<?xml version="1.0"?>  
<catalog xmlns="urn:oasis:names:tc:entity:xmlns:xml:catalog">  
  <rewriteSystem systemIdStartString="http://cobertura.sourceforge.net/xml"  
    rewritePrefix="./DTD"/>  
</catalog>
```

2. Copy the dtd that the XML needs to validate again inside a *DTD* folder in `<configuration>/tools/cobertura/`.

The catalog file will be used the next time the Data Provider is executed and the DTD declaration will dynamically be changed from:

```
<!DOCTYPE coverage SYSTEM "http://cobertura.sourceforge.net/xml/coverage-04.dtd">
```

to:

```
<!DOCTYPE coverage SYSTEM "<configuration>/tools/cobertura/DTD/coverage-04.dtd">
```

For more information about how to write your catalog file, refer to <https://xerces.apache.org/xerces2-j/faq-xcatalogs.html>.

Creating a *form.xml* for your own Data Providers, Repository Connectors and Export Definitions

All Data Providers are utilities that run during an analysis. They usually take an input file to parse or parameters specified by the user to generate output files containing violations or metrics to add to your project. Here is a non-exhaustive list of what some of them do:

- Use XSLT files to transform XML files
- Read information from Microsoft Excel files
- Parse HTML test results
- Query web services
- Export data from OSLC systems
- Launch external processes



Repository Connectors are based on the same model and are used to specifically retrieve source code and other data from source code management systems.

Export Definitions use the same *form.xml* specification to offer custom export formats to users from the web interface, dumping data from highlight definitions into a specified, custom format.

Read on to learn about how to configure your Data Provider, make it available in the web interface, and then understand how to implement the scripted part of a Data Provider that is executed during an analysis.

After you understand how to build a Data Provider using a *form.xml* file, you can apply this knowledge to building Repository Connectors and Export Definitions, as described in [Creating Repository Connectors](#) and [Creating Export Definitions](#).



You can find the XML schema for *form.xml* in [form.xsd](#).

Defining Data Provider Parameters

A Data Provider's parameters are defined in a file called *form.xml*. The following is an example of *form.xml* for a Data Provider extending the GenericPerl framework:

▼ customDP



<input checked="" type="checkbox"/>	ux	<input type="text" value="usability"/>	
tests	<input checked="" type="checkbox"/>	it	<input type="text" value="integration"/>
	<input checked="" type="checkbox"/>	ut	<input type="text" value="unit"/>
ignore_missing_sources	<input type="checkbox"/>		
input_file	<input type="text" value="myFile.xml"/>		
old_results	<input checked="" type="radio"/> Exclude	<input type="radio"/> Include	
password *	<input type="text"/>		

CustomDP parameters

```

<?xml version="1.0" encoding="UTF-8"?>
<tags baseName="GenericPerl" needSources="true" image="CustomDP.png"
projectStatusOnFailure="ERROR">
  <tag type="multipleChoice" displayType="checkbox" optionTitle=" " key="tests">
    <value key="ux" />
    <value key="it" />
    <value key="ut" />
  </tag>
  <tag type="booleanChoice" key="ignore_missing_sources" defaultValue="false" />
  <tag type="text" key="input_file" defaultValue="myFile.xml" changeable="false" />
  <tag type="multipleChoice" key="old_results" style="margin-left:10px" displayType
="radioButton" defaultValue="Exclude">
    <value key="Exclude" />
    <value key="Include" />
  </tag>
  <tag type="text" key="java_path" defaultValue="/usr/bin/java" hide="true" />
  <tag type="password" required="true" key="password" />
</tags>

```

The **tags** element accepts the following attributes:

- **baseName (mandatory if you are not using an exec-phase)** indicates on which framework you are basing this Data Provider. The value of this attribute must match a folder from the *addons* folder of your installation.
- **needSources (optional, default: false)** allows specifying whether the Data Provider requires sources or not. When set to true, an error will be displayed if you try to select this Data Provider without adding any Repository Connector location to your project.
- **image (optional, default: none)** allows displaying a logo in the web UI for the Data Provider
- **projectStatusOnFailure (optional, default: ERROR)** defines what status the project ends in when this Data Provider produces an error. The following values are allowed:
 - **IGNORE**
 - **WARNING**
 - **ERROR**
- **projectStatusOnWarning (optional, default: WARNING)** defines what status the project ends in when this Data Provider produces a warning. The following values are allowed:
 - **IGNORE**
 - **WARNING**
 - **ERROR**

Each **tag** element is a Data Provider option and allows the following attributes:

- **key (mandatory)** is the option's key that will be passed to the perl script, or can be used to specify the parameter's value from the command line
- **type (mandatory)** defines the type of the parameter. The following values are accepted:
 - **text** for free text entry
 - **password** for password fields
 - **booleanChoice** for a boolean
 - **multipleChoice** for offering a selection of predefined values



Predefined values are specified with a **value** element with a mandatory **key** attribute and an optional **option** attribute that allows modifying the value of the option from the UI. The input field for each **option** attribute is only displayed if the parent **tag** contains an **optionTitle** attribute.

- **displayType (optional)** allows specifying how to display a **multipleChoice** parameter by using one of:
 - **comboBox**
 - **radioButton**
 - **checkbox**
- **defaultValue (optional, default: empty)** is the value used for the parameter when not specified
- **hide (optional, default: false)** allows hiding a parameter from the web UI, which is useful when combining it with a default value
- **changeable (optional, default: true)** allows making a parameter configurable only when creating the project but read-only for following analyses when set to true
- **style (optional, default: empty)** allows setting basic css for the attribute in the web UI
- **required (optional, default: false)** allows showing a red asterisk next to the field in the web UI to make it visibly required

You can use a required **tag** of type **booleanchoice** to ensure that users must check a box in the web UI or set its value to *true* when building from the command line in order to proceed with the analysis.

```
<tag type="booleanChoice" required="true" key="accept_privacy_policy" />
```



Wizard Selection > General Information > Data Providers > Rules Edition > Confirmation

• Data Provider 'customDP' > Parameter 'accept_privacy_policy' > This field must be checked or set to true.

▸ Specify Repository Locations

▸ Select Data Providers

▸ customDP

▸ Squan Sources

* Required

Previous Next Cancel

Clicking the **Next** button without checking a required checkbox displays an error

Hiding your Data Provider elements in the web UI

You can associate to your tag element the **displayIf** element:

The **displayIf** (optional)* This element allows the user to define conditions on the tagged field to make it visible in the web UI.

The **displayIf** element accepts logical conditions. These conditions are designed as containers that can contains the following elements:

- **and (optional, applied by default)** all conditions defined in the "and" container must be true in order to display tagged items of the data-provider

- **or (optional)** one condition defined in the "or" container must be true in order to hide tagged items of the data-provider

The **displayIf** elements and conditional containers can accept the following elements:

- **equals (optional)** this element is associated to a tag element defined in the "key" and "value" attributes. The tagged element must contain the value specified in the value attribute in order to be displayed in the web UI
- **notEmpty (optional)** the tag element defined in the "key" attribute has to be filled in order to display the data-provider element in the web UI

You can use the displayIf condition in a **tag** element in order to display the tagged field following conditions you have defined.

Syntax example:



```

<tag type="text" key="config_file" hide="true"/>
<tag type="text" key="url" required="true" >
  <displayIf>

    <notEmpty key="max_results" />

  </displayIf>
</tag>
<tag type="text" key="api_token" required="true" >
  <displayIf>
    <or> <!-- Conditionnal containers can be stacked -->
      <equals key="max_results" value="100"/>
      <notEmpty key="url" />
    </or>
  </displayIf>
</tag>
<tag type="text" key="max_results" required="true" defaultValue="
50" />

```

Localising your Data Provider

In order to display your Data Provider parameters in different languages in the web UI, your Data Provider's *form.xml* does not contain any hard-coded strings. Instead, Square uses each parameter's **key** attribute to dynamically retrieve a translation from a *form_xx.properties* file located next to *form.xml*.

When you create a Data Provider, it is mandatory to include at least an English version of the strings in a file called *form_en.properties*. You are free to add other languages as needed. Here is a sample *.properties* for the CustomDP you created in the previous section:

```
FORM.GENERAL.NAME = CustomDP
FORM.DASHBOARD.NAME = Test Status
FORM.GENERAL.DESCR = CustomDP imports test results for my project
FORM.GENERAL.URL = http://example.com/CustomDP

TAG.tests.NAME = Test Types
TAG.tests.DESCR = Check the boxes next to the types of test results contained in the
results

TAG.ignore_missing_sources.NAME = Ignore Missing Sources

TAG.input_file.NAME = Test Results
TAG.input_file.DESCR = Specify the absolute path to the file containing the test
results

TAG.old_results.NAME = Old Test Results
TAG.old_results.DESCR = If the previous analysis contained results that are not in
this results file, what do you want to do with the old results?
OPT.Exclude.NAME = discard
OPT.Include.NAME = keep

TAG.password.NAME = File Password
TAG.password.DESCR = Specify the password to decrypt the test results file
```

The syntax for the *.properties* file is as follows:

- **FORM.GENERAL.NAME** is the display name of the Data Provider in the project wizard
- **FORM.DASHBOARD.NAME** is the display name of the Data Provider in the Explorer
- **FORM.GENERAL.DESCR** is the description displayed in the Data Provider's tooltip in the web UI
- **FORM.GENERAL.URL** is a reference URL for the Data Provider. Note that it is not displayed in the web UI yet.
- **TAG.tag_name.NAME** allows setting the display name of a parameter
- **TAG.tag_name.DESCR** is a help text displayed in a tooltip next to the Data Provider option in the web UI
- **OPT.option_name.NAME** allows setting the display name of an option

Using the *form_en.properties* above for CustomDP results in the following being displayed in the web UI when launching an analysis:



ux

Test Types it ⓘ

ut

Ignore Missing Sources

Test Results ⓘ

Old Test Results discard keep ⓘ

File Password * ⓘ

If the previous analysis contained results that are not in this results file, what do you want to do with the old results?

CustomDP pulling translations from a .properties file

Not all wizards display all Data Providers by default. If your Data Provider does not appear after refreshing your configuration, make sure that your wizard bundle allows displaying all Data Providers by reviewing the `tools` element of `Bundle.xml`:

```
<?xml version="1.0" encoding="UTF-8"?>
<Bundle>
  <Wizard ... >
    ...
    <tools all="true">
      ...
    </tools>
    ...
  </Wizard>
</Bundle>
```



For more information about the wizard bundle, consult the the chapter called "Project Wizards" in the Configuration Guide.

If you have made this change and your Data Provider still does not appear in your wizard, consult the Validator to find out if it was disabled because of an error in its configuration.

✓ **Model Validator**

Model

Summary | Data Providers | Repositories | Menus | Sources | Descriptions | Tutorials

[ERR]: On data provider: import_ticket > Impossible to find path: tools\InvalidBaseName
[ERR]: On data provider: jira > Unknown tool name on exec-tool > import_ticket.
[ERR]: On data provider: mantis > Unknown tool name on exec-tool > import_ticket.

The General section of the Validator shows errors in your Data Providers

Running your Data Provider

Now that you have a new Data Provider available in the web interface (and the command line), this section will show you how to use these parameters and pass them to one or more scripts or executables in order to eventually write data in the format that Squire expects to import during the analysis.

At the end of a Data Provider execution, Squire expects a file named *input-data.xml* to be written in a specific location. The syntax of the XML file to generate is as follows:

```
<!-- input-data.xml syntax -->
<bundle version="2">
  <artifact [local-key=""] [local-parent=""|parent=""] >
    <artifact [id="<guid-stable-in-time-also-used-as-a-key>"] name="Component"
type="REQ" [location=""] >
      <info name|n="DESCR" value="The description of the object"/>
      <key value="3452-e89b-ff82"/>
      <metric name="TEST_KO" value="2"/>
      <finding name="AR120" loc="xxx" p0="The message" />
      <link name="TEST" local-src=""|src=""|local-dst=""|dst="" />
        <artifact id="" name="SubComponent" type="REQ">
          ...
        </artifact>
      </artifact>
    </artifact>

    <artifact id="" local-key="" name="" type="" local-parent=""|parent="" [location=
"" ] />
    ...

    <link name="" local-src=""|src="" local-dst=""|dst="" />
    ...

    <info local-ref=""|ref="" name="" value="" />
    ...

    <metric local-ref=""|ref="" name="" value="" />
    ...

    <finding local-ref=""|ref="" [location=""] p0="" />
    <finding local-ref=""|ref="" [location=""] p0="">
      <location local-ref=""|ref="" [location=""] />
      ...
      <relax status="RELAXED_DEROGATION|RELAXED_LEGACY|RELAXED_FALSE_POSITIVE"
><![CDATA[My Comment]]></relax>
    </finding>
    ...
  </bundle>
```



You can find the XML schema for *input-data.xml* in [input-data-2.xsd](#).

Your Data Provider is configured by adding an `exec-phase` element with a mandatory `id="add-data"` attribute in `form.xml`.

The basic syntax of an `exec-phase` can be seen below:

```
<exec-phase id="add-data">
  <exec name="tcl|perl|java" | executable="/path/to/bin" | executable=
"executable_name" failOnError="true|false" failOnStdErr="true|false" warn="[WARN]"
error="[ERROR|ERR]" fatal="[FATAL]">
    <arg value="{{<function>(<args>)}}" />
    <arg value="-freeText" />
    <arg value="{{<predefinedVars>}}" />
    <arg value="versions" />
    <arg value="-myTag" />
    <arg tag="myTag" />
    <env key="MY_VAR" value="SOME_VALUE" />
  </exec>
  <exec ... />
  <exec-tool name="another_data_provider">
    <param key="<tagName>" value="<value>" />
    <param key="<tagName>" tag="<tag>" />
    <param ... />
  </exec-tool>
  <exec-tool ... >
    ...
  </exec-tool>
</exec-phase>
```

You can also use Groovy in order to configure your Data Provider.

The basic syntax of a Groovy `exec name` is indicated below:

```
<exec name="java">
  <arg value="{{javaClasspath(poi,groovy,jackson)}}" />
  <arg value="groovy.lang.GroovyShell" />
  <arg value="{{getConfigFile(to_excel.groovy)}}" />
  <arg value="{{getSharedAddonsFile(GroovyScriptUtils.groovy)}}" />
  ...
```



Only the `exec name` section is different. The syntax of the others sections of your Data Provider is still the same.

Executables

The `exec-phase` element accepts one or more launches of scripts or executables specified in an `exec` child element, that can receive arguments and environment variables specified via `arg` and `env` elements.

There are four built-in languages for executables:

- `tcl`

- perl
- java
- Groovy

The scripts are launched using the tcl, perl, or java runtimes defined in your Squire installation. This is also the case for Groovy, which is handled by Java engine.

The following attributes of the `exec` element allow you to control error handling:

- **failOnError** (optional, default: true) marks the Data Provider execution as failed if the executable returns an error code
- **failOnStdErr** (optional, default: true) marks the Data Provider execution as failed if the executable prints something to stderr during the execution
- **warn, error and fatal** (optional, default: see code block above) allow you to define patterns to look for in the executable's standard output to fine-tune the result of the execution.

Other executables can be called, as long as they are available on the system's PATH, or configured in `config.xml`

Given the following `config.xml`:

```
<!-- config.xml (server or cli) -->
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<squire type="server" version="1.3">
  <paths>
    <path name="python" path="C:\Python\python.exe" />
    <path name="git" path="C:\Git\bin\git.exe" />
  </paths>
  ...
</squire>
```

git and python can be called in your Data Provider as follows:

```
<exec-phase id="add-data">
  <exec name="git">
    ...
  </exec>
  <exec name="python">
    ...
  </exec>
</exec-phase>
```

Arguments

Argument values can be:

1. Free text passed in a `value` tag, useful to specify a parameter for your script

```
<exec name="perl">
  <arg value="-V" />
</exec>
```

2. A tag key declared in *form.xml* passed as a `tag` attribute to retrieve the input specified by the user. If no input was specified, you can define a `defaultValue`:

```
<arg tag="maxValue" defaultValue="50" />
<arg tag="configFile" defaultValue="{getConfigFile(default.xml)}" />
```

3. One of the predefined functions

- **`{getOutputFile(<relative/path/to/file>,<abortIfMissing>)}`** returns the absolute path of an *input-data.xml* file output by an `exec-phase`. *failIfMissing* is an optional boolean which aborts the execution when set to `true` if the file is missing.
- **`{getTemporaryFile(<relative/path/to/file>)}`** returns the absolute path of a temporary file created by an `exec` (only for *add-data* and *repo-add-data* phases)
- **`{getAddonsFile(<relative/path/to/file>)}`** returns the absolute path of a file in the Data Provider's addons folder
- **`{getConfigFile(<relative/path/to/file>)}`** returns the absolute path of a file in the Data Provider's configuration folder
- **`*{getSharedAddonsFile(<relative/path/to/file>)}`** returns the absolute path of a file in Data Provider's addons/shared folder, if not returns the absolute path of a file in addons/shared folder
- **`{path(<executable_name>)}`** returns the absolute path of an executable configured in *config.xml*, or just the executable name if the executable is available from the system's PATH.

```
<exec name="...">
  <arg value="-git_path" />
  <arg value="{path(git)}" />
```

- **`{javaClasspath(poi,groovy,jackson,abc.jar,xyz.jar)}`** adds the specified list of jars to the classpath for java execution.

Square will look for the jars in the *addons/lib* folder of your configuration and return a classpath parameter for the desired runtime environment (`-cp="..."` for java)



poi is a shortcut for *poi-ooxml-3.17.jar,poi-3.17.jar,poi-ooxml-schemas-3.17.jar,xmlbeans-2.6.0.jar,commons-collections4-4.1.jar* and configures the environment necessary to use **Apache POI** when creating custom Export Definitions, as described in **Creating Export Definitions**.

groovy is a shortcut for *groovy-2.5.6.jar, groovy-json-2.5.6.jar* and *groovy-xml-2.5.6.jar* libraries needed to run Groovy scripts

jackson is a shortcut for *jackson-core-2.6.3.jar, jackson-databind-2.6.3.jar* and *jackson-annotations-2.6.0.jar* libraries needed to parse Json file

4. One of the predefined variables

- **`{tmpDirectory}`** to get an absolute path to a temp folder to create files

- **`\${sourcesList}** to get a list of the aliases and locations containing the data extracted by the repository connectors used in the analysis
- **`\${outputDirectory}** to get the absolute path of folder where the Data Provider needs to write the final *input-data.xml*

Conditions

You can use condition statements in the `exec` and `exec-tool` elements in order to parametrize the execution of your Data Providers. The `execute-if` element is used as follow :

```
<exec-phase id="add-data">
  <exec name="java">
    <executeIf>
      <equals key="outputFile" value="" /> <!-- Execute this Java process only
if the output file is not provided. -->
    </executeIf>
    ...
  </exec>
</exec-phase>
```

The `execute-if` element uses the same syntax as the `displayIf` element : [Hiding your Data Provider elements in the web UI.](#)

Calling Other Data Providers

You can call and pass parameters to other Data Providers after your `exec-phase` using an `exec-tool` element. The `exec-tool` element uses a mandatory `name` which is the name of the folder containing the other Data Provider to launch in your configuration folder and supports passing the parameters expected by the other Data Provider via one or more `param` elements where:

- **key** is the name of the parameter expected by the other Data Provider (as defined in its *form.xml*)
- **value** allows passing free text
- **tag** allows passing the value of your own Data Provider's tag value to the other Data Provider and can be combined with a `defaultValue` attribute in case no value was specified by the user for the tag

As an example, the following Data Provider generates a CSV file that is then passed to the pep8 Data Provider:

```

<exec-phase id="add-data">
  <exec name="python">
    <arg value="consolidate-reports-recursive.py" />
    <arg value="-folders" />
    <arg tag="root_folder" />
    <arg value="-outputFile" />
    <arg value="output.csv" />
  </exec>
  <exec-tool name="pep8">
    <param key="csv" value="${getOutputFile(output.csv)}" />
    <param key="separator" tag="separator" defaultValue=";" />
  </exec-tool>
</exec-phase>

```

In this other example, a perl script is launched to retrieve issues from a ticketing system and the export data is passed to the **import_ticket** Data Provider:

```

<exec-phase id="add-data">
  <exec name="perl">
    <arg value="${getConfigFile(export_ticket.pl)}" />
    <arg value="-url" />
    <arg tag="url" />
    <arg value="-login" />
    <arg tag="login" />
    <arg value="-pwd" />
    <arg tag="pwd" />
    <arg value="-outputFile" />
    <arg value="${getOutputFile(exportdata.csv,false)}" />
  </exec>
  <exec-tool name="import_ticket">
    <param key="input_file" value="${getOutputFile(exportdata.csv)}" />
    <param key="csv_separator" value=";" />
  </exec-tool>
</exec-phase>

```

If your Data Provider uses a perl script, Squire provides a small library that makes it easy to retrieve script arguments called **SQUIRE::Args**. Using it as part of your script, you can retrieve arguments using the **get_tag_value()** function, as shown below:



```
# name: export_ticket.pl
# description: exports issues to a CSV file
use SQUIRE::Args;
# ...
# ...
my $url = get_tag_value("url");
my $login = get_tag_value("login");
my $pwd = get_tag_value("pwd");
my $outputFile = get_tag_value("outputFile");
# ...
exit 0;
```

Using the Squire toolkit

If you want your Data Provider to use the Squire toolkit to retrieve references to artefacts, the following variables are available (in the *add-data* and *repo-add-data* phases only):

- **`\${tclToolkitDirectory}**: the directory of the toolkit tcl code to execute
- **`\${squanOutputDirectory}**: the directory of containing the results of the execution of Squan Sources

In order to use the toolkit, your **exec** must use the tcl language. As an example, here is a sample **exec-phase** and associated tcl file to get you started:

```
<!-- form.xml -->
<exec-phase id="repo-add-data">
  <exec name="tcl">
    <arg value="${getAddonsFile(repo-add-data.tcl)}" />
    <arg value="${tclToolkitFile}" />
    <arg value="${squanOutputDirectory}" />
    <arg value="${outputDirectory}" />
    <arg tag="xxx" />
  </exec>
</exec-phase>
```

```

#repo-add-data.tcl:
set toolkitFile [lindex $argv 0]
set sqOutputDir [lindex $argv 1]
set outputDir [lindex $argv 2]
set xxx [lindex $argv 3]

# Initialise the toolkit
puts "Initializing toolkit"
source $toolkitFile
toolkit::initialize $sqOutputDir $outputDir

# Execute your code
puts "Main execution"
# your code here
# ...

# Generate xml files (artefacts)
puts "Generating xml files"
toolkit::generate $outputDir {artefacts}

```

Finding More Examples

If you want to find more examples of working Data Providers that use this syntax, check the following Data Providers in Squire's default configuration folder:

- **conf-checker** calls a jar file to write an XML file in Squire's exchange format
- **import_ticket** parses a file to translate it into a format that can then be passed to **csv_import** to import the tickets into Squire
- **jira** retrieves data from Jira and passes it to **import_ticket**

Built-in Data Provider Frameworks

In order to help you import data into Squire, the following Data Provider frameworks are provided and can write a valid *input-data.xml* file for you:

1. csv_import

The `csv_import` framework allows you to write Data Providers that produce CSV files and then pass them on to the framework to be converted to an XML format that Squire understands. This framework allows you to import metrics, findings, textual information and links as well as generate your own artefacts. It is fully linked to the source code parser and therefore allows to locate existing source code artefacts generated by the source code parser. Refer to the [full csv_import Reference](#) for more information.

2. xml

The `xml` framework is a sample implementation of a Data Provider that allows you to directly import an XML file or run it through an XSL transformation so that it matches the input format expected by Squire (*input-data.xml*). This framework therefore allows you to import metrics, findings, textual information and links as well as generate your own artefacts. Refer to the [full xml Reference](#) for more information.



If you are looking for the legacy Data Provider frameworks from previous versions of Squire, consult [Legacy Frameworks](#).

The legacy Data Provider frameworks are still supported, however using the new frameworks is recommended for developing new Data Providers, as they are more flexible and provide more functionality to interact with source code artefacts.

Creating Repository Connectors

The same syntax used to create Data Providers can be used to create Repository Connectors, and therefore instruct Squire to get source code from SCMs. Instead of using an `exec-phase` with the `id="add-data"`, your Repository Connector should define the following phases:

- `id="import"` defines how you extract source code and make it available to Squire Sources so it can be analysed. This phase is expected to return a path to a folder containing the sources to analyse or a `data.properties` file listing the path to the folder containing source and various other properties to be used in other executions:

```
directory=/path/to/sources-to-analyse
data.<key1>=<value1>
data.<key2>=<value2>
```

This phase is executed once per source code node in the project and allows you to use the following additional variables: **`outputSourceDirectory`** is the folder containing the sources to analyse **`alias`** is the alias used for the source code node (empty if there is only one source code node)

- `id="repo-add-data"` is similar to the `add-data` phase described for Data Providers in [Running your Data Provider](#) and is expected to produce an `input-data.xml`. The only difference in the case of a Repository Connector is that this phase is executed once per source code node in the analysis.
- `id="display"` is the phase that is called when users request to view the source code for an artefact from the web UI. This phase is expected to return a `data.properties` file with the following keys:

```
filePath=/path/to/source/file
displayPath=<Artefact Display Path (optional)>
```

The contents of `filePath` will be loaded in the source code viewer, while the value of `displayPath` will be used as the file path displayed in the header of the source code viewer.

This phase allows you to use the following additional variables:

- **`scalInfo`** is text to display in the title bar of the source code viewer in the web interface
- **`artefactName`** is the name of the file to display
- **`artefactPath`** is the path (without the alias) of the file to display

During the **display** phase, you can retrieve any data set during the **import** phase for the repository using the `getImportData(<key1>)` function

Additional attributes are available for the `tags` element of a Repository Connector:

- **`deleteTmpSrc`** (optional, default: false) indicates whether or not the content of **sources** folder

coming from this Repository Connector will be deleted upon Squire Server restart.

- **useCredentialsForSCA (optional, default: true)** allows specifying whether credentials dialog will be prompted in View Source Code or not.



Consult `SVN's form.xml` in `<SQUIRE_HOME>/configuration/repositoryConnectors/SVN` for a working example of a Repository Connector that uses all the phases described above.

Please note, as data-provider, you can use the `<exec-tool>` parameter in order to call other elements while processing, like Data Provider or Scripts. For more informations about `<exec-tool>` parameter, please refer to [Running your Data Provider](#).

Creating Export Definitions

The `form.xml` specification can also be used to create Export Definitions that allow users to export data based on one or more highlight categories from the web interface.

The Highlights to Excel Export Definition

The **Highlights to Excel** Export Definition uses the following `form.xml`:

```
<?xml version="1.0" encoding="UTF-8"?>
<tags>
  <tag type="multipleChoice" displayType="multi-autocomplete" required="true" key="
  highlights">
    <values type="highlights" />
  </tag>

  <exec-phase id="export">
    <exec name="java">
      <arg value="{{javaClasspath(poi,groovy,jackson)}}" />
      <arg value="groovy.lang.GroovyShell" />
      <arg value="{{getConfigFile(to_excel.groovy)}}" />
      <arg value="{{getSharedAddonsFile(GroovyScriptUtils.groovy)}}" />
    </exec>
  </exec-phase>
</tags>
```

```

<arg value="-importScript"/>
<arg value="{getSharedAddonsFile(exports_utils.groovy)}" />

<arg value="-squareApiUtils"/>
<arg value="{getSharedAddonsFile(SquareApiUtils.groovy)}" />

<arg value="-excelUtilsScript"/>
<arg value="{getSharedAddonsFile(ExcelUtils.groovy)}" />

<arg value="-highlights"/>
<arg tag="highlights" />

<arg value="-outputDirectory" />
<arg value="{outputDirectory}" />

<arg value="-idArtefact" />
<arg value="{idArtefact}"/>

<arg value="-idVersion"/>
<arg value="{idVersion}"/>

<arg value="-idModel"/>
<arg value="{idModel}"/>

<arg value="-group"/>
<arg value="{group}"/>

<arg value="-serverUrl"/>
<arg value="{localUrl}"/>

<arg value="-token"/>
<arg value="{token}"/>

<arg value="-template"/>
<arg value="{getConfigFile(template.xlsx)}" />
</exec>
</exec-phase>
</tags>

```



Data is exported from the server as a JSON file, which your Export Definition can modify as needed before sending it to the end-user who launched the export. You can consult the format of the JSON file in the **Data Exchange Formats** appendix for more information.

In order to create an Export Definition, the syntax described in [Defining Data Provider Parameters](#) and [Running your Data Provider](#) is augmented to include the extra additional capabilities:

1. A **multi-autocompletedisplayType** for multipleChoice **tag** elements.

The **tag** element accepts a **values** sub-element with a mandatory **type** attributes. When set to

highlights, the widget automatically displays all the available highlight definitions for the currently selected artefact.

2. A mandatory `exec-phase` with `id="export"` that contains one or more `execs`.

This `exec-phase` is expected to return a `data.properties` file with the following keys:

```
filename=/path/to/export/file
```

3. Variables that can be used in the `exec-phase` to pass the context of the currently selected artefact to the Export Definition:
 - `${idUser}` is the ID of the user generating the export
 - `${token}` is the auto-generated token for on the fly authentication to the API REST
 - `${idArtefact}` is the ID of the currently selected artefact
 - `${idVersion}` is the ID of the version of the project that is currently selected
 - `${idApplication}` is the ID of the project that currently selected
 - `${idModel}` is the ID of the analysis model used for the project that is currently selected
 - `${group}` is the path of the current selected group portfolio
 - `${serverUrl}` is the Squire Server URL, as defined in **Administration > System**
 - `${localUrl}` is the Squire Local URL

You can add your own Export Definition by following these steps:

1. Create a folder in `configuration/exports` called `my_export_definition`.
2. Create a `form.xml` and `form_en.properties` in `my_export_definition`
3. Define the `exec-phase` that your Export Definition will run
4. Add your Export Definition to your model's Export Bundle for the desired role and artefact type, using the folder name (`my_export_definition`) as the `ExportDef`'s `name` attribute:

```
<?xml version="1.0" encoding="UTF-8"?>
<Bundle>
  <Role name="DEFAULT">
    <Export type="...">
      <ExportDef name="my_export_definition" />
      ...
    </Export>
    ...
  </Role>
</Bundle>
```

5. Reload the Squire configuration and your Export Definition should appear in the Reports tab of the Explorer.

For more examples of custom Export Definitions, consult the `configuration/exports` and `addons/exports` folders of the default Squire configuration.



Please note, as data-provider, you can use the `<exec-tool>` parameter in order to call other elements while processing, like Data Provider or Scripts. For more informations about `<exec-tool>` parameter, please refer to [Running your Data Provider](#).

Chapter 5. Cloning Detection

This chapter lists the various metrics collected in Squore when running the cloning detection tool, as well as the violations presented in the Findings tab of the web interface.

Note that the concepts used for cloning detection in Squore are based on the notions of *longest common subsequence problem* (http://en.wikipedia.org/wiki/Longest_common_subsequence_problem) and *longest repeated substring problem* (http://en.wikipedia.org/wiki/Longest_repeated_substring_problem).

Cloning Metrics

None of the metrics below are set by the cloning detection tool if thresholds are not met. That is, if an artefact has no CC measure in the output file, that does NOT mean that it has no line in common with other artefacts. In models, metrics default to 0 though.

The two main thresholds are:

- A minimum size, to skip small artefacts
- A minimum cloning ratio, to keep only similar artefacts

CCLC - Code Cloning Line Counting

Number of lines taken into account by the cloning detection tool. This metric is impacted by parameters like "Ignore blank lines", or "Ignore comments blocks".

CC - Code Cloned

Length of the highest Longest Common Substring (LCS) among all cloned artefacts.

Clones are looked in the whole application, in artefacts with the same language and the same type.

- Textual detection, using lines, with trailing spaces removed
- Two artefacts are cloned if they have 90% of lines in common, for $LC \geq 10$

Scope: all artefacts but the root node.

CFTC - Control Flow Token (CFT) Cloned

Length of the highest LCS among all cloned CFT.

Clones are looked in the whole application, in artefacts with the same language and the same type.

- Algorithmic detection, using CFT characters
- Two artefacts are cloned if they have 90% of characters in common, for $CFT \geq 50$

Scope: all artefacts but the root node.

CAC - Children Artefact Cloned

Number of clones in direct children of an artefact.

Parent clones are looked in the whole application, in artefacts with the same language and the same type.

Two classes may have two methods in common, for example, without being cloned. The CAC

metric for these two classes will be two (assuming that they only have these two methods in common). Such artefacts should be re-factored (using inheritance for example).

- Use both textual (CC > 0) and algorithmic (CFTC > 0) cloning when counting
- Two parent artefacts are cloned if 25% of their direct children are cloned
- Small children artefacts (LC < 10) are taken in account, using exact comparison

Scope: all artefacts but the root node.

CN - Clones Number

Number of cloned artefacts.

Clones are looked in the whole application, in artefacts with the same language and the same type.

- Use both textual (CC > 0) and algorithmic (CFTC > 0) cloning when counting

Scope: all artefacts but the root node.

RS - Repeated Substrings (Repeated Code Blocks)

Length of all Repeated Substrings in the artefact definition.

That is, duplicated blocks in a function for example.

- Textual detection, using lines, with trailing spaces removed
- The metric is triggered if blocks longer than 10 are found, for LC >= 10

Scope: files and all children artefacts.

CFTRS - Repeated Substrings in Control Flow Token

Length of all Repeated Substrings in the artefact CFT.

That is, duplicated algorithmic blocks in a function for example.

- Algorithmic detection, using CFT characters
- The metric is triggered if blocks longer than 20 are found, for CFT >= 50

Scope: artefacts with a CFT, like functions.

ICC - Inner Code Cloned

Number of duplicated lines in an artefact.

Clones are looked in all descendants of the artefact. This basically sums all duplicated lines in descendants.

- Use textual cloning (CC > 0) when counting

Scope: all artefacts.

ICFTC - Inner Control Flow Token Cloned

Number of duplicated tokens in an artefact.

Clones are looked in all descendants of the artefact. This basically sums all cloned tokens in descendants.

- Use algorithmic cloning (CFTC > 0) when counting

Scope: all artefacts.

Cloning Violations

This section lists all the findings that are reported by Squore cloning detection tool.

CC (R_NOCC)

Avoid code duplication.

- Similar artefacts (transitive closure) are part of the same violation
- Use artefacts with textual cloning (CC > 0) when grouping

Scope: files and all children artefacts.

CFTC (R_NOCFTC)

Avoid algorithmic cloning.

- Similar artefacts (transitive closure) are part of the same violation
- Use artefacts with algorithmic cloning (CFTC > 0) when grouping

Scope: artefacts with a CFT, like functions.

CAC (R_NOCAC)

Consider refactorisation.

- Similar artefacts (transitive closure) are part of the same violation
- Use "refactorable" artefacts (CAC > 0) when grouping

Scope: files and all children artefacts.

RS (R_NORS)

Consider refactorisation.

- One violation per "refactorable" artefact (RS > 0)

Scope: files and all children artefacts.

CFTRS (R_NOCFTRS)

Consider algorithmic refactorisation.

- One violation per "refactorable" artefact (CFTRS > 0)

Scope: artefacts with a CFT, like functions.

Chapter 6. Glossary

Acceptance Testing

Formal testing conducted to enable a user, customer, or other authorised entity to determine whether to accept a system or component. [[SIGIST](#)]

Other Definitions

Acceptance Testing [[IEEE 610.12](#)]: Formal testing conducted to determine whether or not a system satisfies its acceptance criteria and to enable the customer to determine whether or not to accept the system.

See also

Standards:

- [SIGIST](#)
- [IEEE 610.12](#)

External Links:

- [Acceptance_testing](#)

Accessibility

Usability of a product, service, environment or facility by people with the widest range of capabilities. [[ISO/IEC/IEEE 24765](#), [ISO/IEC 25062](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC 25062](#)
- [ISO/IEC/IEEE 24765](#)

Accuracy

The capability of the software product to provide the right or agreed results or effects with the needed degree of precision. [[ISO/IEC 9126-1](#)]

Other Definitions

Accuracy [[ISO/IEC/IEEE 24765](#)]:

1. A qualitative assessment of correctness, or freedom from error.

2. A quantitative measure of the magnitude of error

See also

Standards:

- [ISO/IEC 9126-1](#)
- [ISO/IEC/IEEE 24765](#)

Accuracy of Measurement

The closeness of the agreement between the result of a **measurement** and the true value of the **measurand**. [[ISO/IEC 14143-3](#), [ISO/IEC/IEEE 24765](#)]

Notes

- **Accuracy**
 - + [2: ISO/IEC 99:2007 International vocabulary of metrology - Basic and general concepts and associated terms]
- [ISO/IEC 14143-3](#)

See also

Standards:

- [ISO/IEC 99](#)
- [ISO/IEC 14143](#)
- [ISO/IEC/IEEE 24765](#)

Acquirer

Individual or organisation that procures a **system**, **software product**, or software **service** from a **supplier**. [[ISO/IEC 9126-1](#), [ISO/IEC 15939](#)]

Other Definitions

Acquirer [[ISO/IEC/IEEE 24765](#), [ISO/IEC 12207](#)]: **Stakeholder** that acquires or procures a product or service from a **supplier**.

Acquirer [[IEEE 1058](#), [ISO/IEC 15288](#)]: The individual or organization that specifies **requirements** for and accepts delivery of a new or modified **software product** and its **documentation**.

Notes

- **supplier**
- **contract**
- [ISO/IEC/IEEE 24765](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Supplier](#)

Standards:

- [IEEE 1058](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC 15939](#)
- [ISO/IEC/IEEE 24765](#)

Action

Element of a [step](#) that a [user](#) performs during a [procedure](#). [[ISO/IEC 26514](#)]

See also

Glossary:

- [Procedure](#)
- [Step](#)
- [Task](#)

Standards:

- [ISO 5806](#)
- [ISO/IEC 26514](#)

Activity

Any step taken or function performed, both mental and physical, toward achieving some objective. Activities include all the work the managers and technical staff do to perform the tasks of the project and organization. [[CMMi](#)]

Other Definitions

Activity [[ISO/IEC 12207](#), [ISO/IEC 15288](#)]: Set of cohesive tasks of a process.

Activity [[IEEE 1490](#)]: A component of work performed during the course of a project.

Activity [[ISO/IEC 14756](#)]: An order submitted to the system under test (SUT) by a user or an emulated user demanding the execution of a data processing operation according to a defined algorithm to produce specific output data from specific input data and (if requested) stored data.

Activity [[IEEE 1074](#)]: A defined body of work to be performed, including its required input information and output information

Activity [[ISO/IEC 90003](#)]: Collection of related tasks.

Activity [[IEEE 829](#)]: Element of work performed during the implementation of a process.

Notes

- [tasks](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Task](#)

Standards:

- [CMMi](#)
- [IEEE 829](#)
- [IEEE 1074](#)
- [IEEE 1490](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 14756](#)
- [ISO/IEC 15288](#)
- [ISO/IEC 90003](#)
- [ISO/IEC/IEEE 24765](#)

Actor

A [role](#) (with respect to that action) in which the enterprise object fulfilling the role participates in the action. [[ISO/IEC 15414](#)]

See also

Standards:

- [ISO/IEC 15414](#)

Adaptability

The capability of the software product to be adapted for different specified environments without applying actions or means other than those provided for this purpose for the software considered. [[ISO/IEC 9126-1](#)]

Notes

- [ISO/IEC 9126-1](#)
- [operability](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Changeability](#)
- [Flexibility](#)

Standards:

- [ISO/IEC 9126-1](#)
- [IEEE 610.12](#)

Agreement

Mutual acknowledgement of terms and conditions under which a working relationship is conducted. [[ISO/IEC 12207](#), [ISO/IEC 15288](#)]

See also

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)

Analysability

The capability of the software product to be diagnosed for deficiencies or causes of failures in the software, or for the parts to be modified to be identified. [[ISO/IEC 9126-1](#)]

See also

- [ISO/IEC 9126-1](#)

Analysis Model

Algorithm or calculation combining one or more [base](#) and/or [derived](#) measures with associated [decision criteria](#). [[ISO/IEC 25000](#)]

See also

Standards:

- [ISO/IEC 25000](#)

Architecture

Fundamental organization of a system embodied in its [components](#), their relationships to each other, and to the [environment](#), and the principles guiding its [design](#) and evolution. [[ISO/IEC 15288](#)]

]

Notes

- [design](#)
- [components](#)
- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC 15288](#)
- [ISO/IEC/IEEE 24765](#)

Attractiveness

The capability of the software product to be attractive to the user. [[ISO/IEC 9126-1](#)]

Other Definitions

Other definitions of this word are..

See also

- [ISO/IEC 9126-1](#)

Attribute

A measurable physical or abstract property of an entity. [[ISO/IEC 12207](#), [ISO/IEC 14598](#)]

Other Definitions

Attribute [[IEEE 610.12](#)]: A characteristic of an item; for example, the item's color, size, or type.

Attribute [[ISO/IEC 15939](#), [ISO/IEC 25000](#)]: Inherent property or characteristic of an entity that can be distinguished quantitatively or qualitatively by human or automated means.

Attribute for Quality Measure [[ISO/IEC 25000](#)]: Attribute that relates to software product itself, to the use of the software product or to its development process.

Notes

- [ISO/IEC/IEEE 24765](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [External Attribute](#)
- [Internal Attribute](#)

- [Optional Attribute](#)

Standards:

- [IEEE 610.12](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 14598](#)
- [ISO/IEC 15939](#)
- [ISO/IEC/IEEE 24765](#)

Availability

The degree to which a system or component is operational and accessible when required for use. [[ISO/IEC 20000](#)]

Other Definitions

Availability [[ISO/IEC 20000](#)]: Ability of a component or service to perform its required function at a stated instant or over a stated period of time.

Notes

- [ISO/IEC 25000](#)

See also

Glossary:

- [Fault Tolerance](#)

Standards:

- [ISO/IEC 25000](#)

Base Measure

Measure defined in terms of an **attribute** and the **method** for quantifying it. [[ISO/IEC 99](#), [ISO/IEC 15939](#), [ISO/IEC 25000](#)]

Notes

- [ISO/IEC 15939](#)

See also

Glossary:

- [Measure](#)
- [Derived Measure](#)
- [Direct Measure](#)
- [External Measure](#)

- [Indirect Measure](#)
- [Internal Measure](#)

Standards:

- [ISO/IEC 99](#)
- [ISO/IEC 15939](#)
- [ISO/IEC 25000](#)

Baseline

Formally approved version of a configuration item, regardless of media, formally designated and fixed at a specific time during the configuration item's life cycle. [[ISO/IEC 19770-1](#)]

Other Definitions

Baseline [[ISO/IEC 12207](#), [ISO/IEC 15288](#)]: Specification or product that has been formally reviewed and agreed upon, that thereafter serves as the basis for further development, and that can be changed only through formal change control procedures.

Baseline [[ISO/IEC 20000](#)]: Snapshot of the state of a service or individual configuration items at a point in time.

Baseline [[IEEE 1490](#)]: An approved plan (for a project), plus or minus approved changes. It is compared to actual performance to determine if performance is within acceptable variance thresholds. Generally refers to the current baseline, but may refer to the original or some other baseline. Usually used with a modifier (e.g., cost performance baseline, schedule baseline, performance measurement baseline, technical baseline).

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Configuration Management](#)

Standards:

- [IEEE 1490](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC 20000](#)
- [ISO/IEC 25000](#)
- [ISO/IEC/IEEE 24765](#)

Branch

A Branch is either:

- [component](#)
- [component](#)
- [component](#)
- [component](#)
- [SIGIST](#)

Other Definitions

Branch [[ISO/IEC/IEEE 24765](#)]:

1. a computer program construct in which one of two or more alternative sets of program statements is selected for execution.
2. a point in a computer program at which one of two or more alternative sets of program statements is selected for execution.
3. to perform the selection in (1).
4. any of the alternative sets of program statements in (1).
5. a set of evolving source file versions.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Branch Coverage](#)

Standards:

- [SIGIST](#)
- [ISO/IEC/IEEE 24765](#)

Branch Coverage

The percentage of [branches](#) that have been exercised by a [test case suite](#). [[SIGIST](#)]

See also

Glossary:

- [Branch](#)
- [Coverage](#)

Standards:

- [SIGIST](#)

Branch Testing

[Testing](#) designed to execute each outcome of each decision point in a computer program. [

[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Path Testing](#)
- [Statement Testing](#)
- [Testing](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Budget

The approved estimate for the project or any work breakdown structure component or any schedule activity. [[IEEE 1490](#)]

Notes

- [IEEE 1490](#)

See also

Standards:

- [IEEE 1490](#)

Build

An operational version of a [system](#) or [component](#) that incorporates a specified subset of the capabilities that the final product will provide. [[IEEE 610.12](#), [ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [IEEE 610.12](#)
- [ISO/IEC/IEEE 24765](#)

Call Graph

A diagram that identifies the modules in a system or computer program and shows which modules call one another. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Capability Maturity Model

Model that contains the essential elements of effective processes for one or more disciplines and describes an evolutionary improvement path from ad hoc, immature processes to disciplined, mature processes with improved quality and effectiveness. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Capability Maturity Model [[CMMi](#)]: A description of the stages through which software organizations evolve as they define, implement, measure, control, and improve their software processes. This model provides a guide for selecting process improvement strategies by facilitating the determination of current process capabilities and the identification of the issues most critical to software quality and process improvement.

See also

Standards:

- [CMMi](#)
- [ISO/IEC/IEEE 24765](#)

Certification

A formal demonstration that a system or component complies with its specified requirements and is acceptable for operational use. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Certification [[ISO/IEC/IEEE 24765](#)]:

1. A written guarantee that a system or component complies with its specified requirements and is acceptable for operational use.
2. The process of confirming that a system or component complies with its specified requirements and is acceptable for operational use.

Example

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Certification Criteria](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Certification Criteria

A set of standards, rules, or properties to which an asset must conform in order to be certified to a certain level. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Certification](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Change Control Board

A formally constituted group of stakeholders responsible for reviewing, evaluating, approving, delaying, or rejecting changes to a project, with all decisions and recommendations being recorded. [[IEEE 1490](#)]

See also

Standards:

- [IEEE 1490](#)

Change Control System

A collection of formal documented procedures that define how project deliverables and documentation will be controlled, changed, and approved. [[IEEE 1490](#), [ISO/IEC/IEEE 24765](#)]

Notes

- [configuration management](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Change Management](#)
- [Configuration Management](#)

Standards:

- [IEEE 1490](#)

- [ISO/IEC/IEEE 24765](#)

Change Management

Judicious use of means to effect a change, or a proposed change, to a product or service. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Change Control System](#)
- [Configuration Management](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Changeability

The capability of the software product to enable a specified modification to be implemented. [[ISO/IEC 9126-1](#)]

Notes

- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Flexibility](#)

Standards:

- [ISO/IEC 9126-1](#)

Co-existence

The capability of the **software product** to co-exist with other independent software in a common environment sharing common resources. [[ISO/IEC 9126-1](#)]

See also

Standards:

- [ISO/IEC 9126-1](#)

Code

In software engineering, computer instructions and data definitions expressed in a programming language or in a form output by an assembler, compiler, or other translator. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Code (verb) [[ISO/IEC/IEEE 24765](#)]: To express a computer program in a programming language.

See also

Glossary:

- [Coding](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Code Coverage

An analysis method that determines which parts of the software have been executed (covered) by the [test case suite](#) and which parts have not been executed and therefore may require additional attention. [[SIGIST](#)]

See also

Glossary:

- [Coverage](#)

Standards:

- [SIGIST](#)

Code Freeze

A period during which non-critical changes to the [code](#) are not allowed. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Code](#)
- [Feature Freeze](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Code Review

A meeting at which software **code** is presented to project personnel, managers, users, customers, or other interested parties for comment or approval. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Code](#)
- [Coding](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Code Verification

Ensures by static verification methods the conformance of source code to the specified design of the

software module, the required coding standards, and the safety planning requirements. [[IEC 61508-3](#)]

See also

- [IEC 61508-3](#)

Coding

In software engineering, the process of expressing a computer program in a programming language. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Coding [[ISO/IEC/IEEE 24765](#)]: The transforming of logic and data from design specifications (design descriptions) into a programming language.

See also

Glossary:

- [Code](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Cohesion

In software design, a measure of the strength of association of the elements within a module. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Cohesion [[ISO/IEC/IEEE 24765](#)]: The manner and degree to which the tasks performed by a single software module are related to one another.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Coupling](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Commercial-Off-The-Shelf (COTS)

Software defined by a market-driven need, commercially available, and whose fitness for use has been demonstrated by a broad spectrum of commercial **users**. [[ISO/IEC 25051](#)]

Notes

- [software product](#)
- [user documentation](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Software Product](#)

Standards:

- [ISO/IEC 15289](#)
- [ISO/IEC 25051](#)
- [ISO/IEC 90003](#)
- [ISO/IEC/IEEE 24765](#)

Commit

To integrate the changes made to a developer's private view of the source code into a branch accessible through the version control system's repository. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Configuration Management](#)
- [Software Repository](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Commitment

An action resulting in an obligation by one or more of the participants in the act to comply with a rule or perform a contract. [[ISO/IEC 15414](#)]

Other Definitions

Commitment [[CMMi](#)]: A pact that is freely assumed, visible, and expected to be kept by all parties.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [CMMi](#)
- [ISO/IEC 15414](#)
- [ISO/IEC/IEEE 24765](#)

Compatibility

The ability of two or more systems or components to perform their required functions while sharing the same hardware or software environment. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Compatibility [[ISO/IEC/IEEE 24765](#)]: The ability of two or more systems or components to exchange information.

Compatibility [[ISO/IEC 2382-1](#)]: The capability of a functional unit to meet the requirements of a specified interface without appreciable modification.

See also

Standards:

- [ISO/IEC 2382-1](#)
- [ISO/IEC/IEEE 24765](#)

Complexity

The degree to which a **system's design** or **code** is difficult to understand because of numerous components or relationships among components. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Complexity [[ISO/IEC/IEEE 24765](#)]: The degree to which a **system** or **component** has a **design** or **implementation** that is difficult to understand and verify.

See also

Glossary:

- [Maintainability](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Component

An entity with discrete structure, such as an assembly or software module, within a system considered at a particular level of analysis. [[ISO/IEC 15026](#)]

Other Definitions

Component [[SIGIST](#)]: A minimal software item for which a separate specification is available.

Component [[IEEE 829](#)]: One of the parts that make up a system.

Component [[ISO/IEC 29881](#)]: Set of functional services in the software, which, when implemented, represents a well-defined set of functions and is distinguishable by a unique name.

Software Component [[IEEE 1061](#)]: A general term used to refer to a software system or an element, such as module, unit, data, or document.

Software Component [[ISO/IEC/IEEE 24765](#)]: A functionally or logically distinct part of a software configuration item, distinguished for the purpose of convenience in designing and specifying a complex **SCI** as an assembly of subordinate elements.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Configuration Item](#)

Standards:

- [IEEE 829](#)
- [IEEE 1061](#)

- [ISO/IEC 15026](#)
- [ISO/IEC 29881](#)
- [ISO/IEC/IEEE 24765](#)
- [SIGIST](#)

Conciseness

Software [attributes](#) that provide implementation of a function with a minimum amount of [code](#). [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Condition

A boolean expression containing no boolean operators. For instance $A < B$ is a condition but A and B is not. [[RTCA/EUROCAE](#)]

Other Definitions

Condition [[ISO 5806](#), [ISO/IEC/IEEE 24765](#)]: a description of a contingency to be considered in the representation of a problem, or a reference to other procedures to be considered as part of the condition.

See also

Standards:

- [RTCA/EUROCAE](#)
- [ISO/IEC/IEEE 24765](#)

Configuration

The arrangement of a computer system or component as defined by the number, nature, and interconnections of its constituent parts. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Configuration [[ISO/IEC/IEEE 24765](#)]: In [configuration management](#), the functional and physical characteristics of hardware or software as set forth in technical documentation or achieved in a product.

Configuration [[ISO/IEC/IEEE 24765](#)]: The arrangement of a system or network as defined by the nature, number, and chief characteristics of its functional units.

Configuration [[ISO/IEC/IEEE 24765](#)]: The requirements, design, and implementation that define a particular version of a system or system component.

Configuration [[ISO/IEC 2382-1](#)]: The manner in which the hardware and software of an information processing system are organized and interconnected.

See also

Glossary:

- [Configuration Item](#)
- [Configuration Management](#)

Standards:

- [ISO/IEC 2382-1](#)
- [ISO/IEC/IEEE 24765](#)

Configuration Control

An element of [configuration management](#), consisting of the evaluation, coordination, approval or disapproval, and implementation of changes to configuration items after formal establishment of their configuration identification. [[IEEE 610.12](#), [ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Configuration Management](#)

Standards:

- [IEEE 610.12](#)
- [ISO/IEC/IEEE 24765](#)

Configuration Item

Entity within a [configuration](#) that satisfies an end use function and that can be uniquely identified at a given reference point. [[ISO/IEC 12207](#)]

Other Definitions

Configuration Item [[ISO/IEC 19770](#)]: Item or aggregation of hardware or software or both that is designed to be managed as a single entity.

Configuration Item [[ISO/IEC 20000-1](#)]: Component of an infrastructure or an item which is, or will be, under the control of [configuration management](#).

Configuration Item [[ISO/IEC/IEEE 24765](#)]: An aggregation of hardware, software, or both, that is designated for [configuration management](#) and treated as a single entity in the [configuration management](#) process.

Configuration Item [[ISO/IEC/IEEE 24765](#)]: Aggregation of work products that is designated for [configuration management](#) and treated as a single entity in the configuration management process.

Software Configuration Item [[ISO/IEC/IEEE 24765](#)]: A software entity that has been established as a configuration item.

Notes

- [ISO/IEC/IEEE 24765](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Configuration](#)
- [Configuration Management](#)

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 19770](#)
- [ISO/IEC 20000](#)
- [ISO/IEC/IEEE 24765](#)

Configuration Management

A discipline applying technical and administrative direction and surveillance to

- identify and document the functional and physical characteristics of a configuration item,
- control changes to those characteristics, record and report change processing and implementation status, and
 - [IEEE 610.12](#)
 - [ISO/IEC/IEEE 24765](#)

Other Definitions

Configuration Management <ref name="sting">Software Technology Interest Group On-line Glossary, <http://www.apl.jhu.edu/Notes/Hausler/web/glossary.html> .</ref>: The process of identifying, defining, recording and reporting the configuration items in a system and the change requests. Controlling the releases and change of the items throughout the life-cycle.

Configuration Management [[ISO/IEC 29881](#)]: Technical and organizational activities comprising configuration identification, control, status accounting, and auditing.

Software Configuration Management [[ISO/IEC 15846](#)]: The process of applying configuration management throughout the software life cycle to ensure the completeness and correctness of [Software Configuration Items](#).

See also

Glossary:

- [Change Management](#)
- [Configuration Control](#)
- [Configuration Item](#)

Standards:

- [IEEE 610.12](#)

- [ISO/IEC 15846](#)
- [ISO/IEC 29881](#)
- [ISO/IEC/IEEE 24765](#)

External Links:

- [Software Configuration Management](#)

Configuration Management System

The discipline of identifying the components of a continually evolving system to control changes to those components and maintaining integrity and traceability throughout the life cycle. [[ISO/IEC/IEEE 24765](#)]

Notes

- A subsystem of the overall project management system. It is a collection of formal documented procedures used to apply technical and administrative direction and surveillance to:
 - * identify and document the functional and physical characteristics of a product, result, service, or component;
 - * control any changes to such characteristics;
 - * record and report each change and its implementation status; and
 - * support the audit of the products, results, or components to verify conformance to requirements.

:It includes the documentation, tracking systems, and defined approval levels necessary for authorizing and controlling changes. [[IEEE 1490](#)]

See also

Glossary:

- [Configuration Management](#)

Standards:

- [IEEE 1490](#)
- [ISO/IEC/IEEE 24765](#)

Conflict

A change in one **version** of a file that cannot be reconciled with the version of the file to which it is applied. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Version](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Conformance

The fulfillment by a product, process or service of specified requirements. [[ISO/IEC 12207](#)]

See also

Glossary:

- [Requirement](#)

Standards:

- [ISO/IEC 12207](#)

Connectivity

The capability of a system or device to be attached to other systems or devices without modification. [[ISO/IEC 2382-1](#)]

See also

Standards:

- [ISO/IEC 2382-1](#)

Consistency

The degree of uniformity, standardization, and freedom from contradiction among the documents or parts of a [system](#) or [component](#). [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Consistency [[ISO/IEC/IEEE 24765](#)]: Software [attributes](#) that provide uniform design and implementation techniques and notations.

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Constraint

A restriction on the value of an attribute or the existence of any object based on the value or

existence of one or more others. [[ISO/IEC 15474-1](#)]

Other Definitions

Constraint [[IEEE 1362](#)]: An externally imposed limitation on system requirements, design, or implementation or on the process used to develop or modify a system.

Constraint [[IEEE 1490](#)]: The state, quality, or sense of being restricted to a given course of action or inaction. An applicable restriction or limitation, either internal or external to a project, which will affect the performance of the project or a process. For example, a schedule constraint is any limitation or restraint placed on the project schedule that affects when a schedule activity can be scheduled and is usually in the form of fixed imposed dates.

Constraint [[IEEE 1233](#)]: A statement that expresses measurable bounds for an element or function of the system.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Requirement](#)

Standards:

- [IEEE 1233](#)
- [IEEE 1362](#)
- [IEEE 1490](#)
- [ISO/IEC 15474-1](#)
- [ISO/IEC/IEEE 24765](#)

Content Coupling

A type of [coupling](#) in which some or all of the contents of one software module are included in the contents of another module. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Control Coupling](#)
- [Coupling](#)
- [Data Coupling](#)
- [Hybrid Coupling](#)
- [Pathological Coupling](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Context of Use

Users, tasks, equipment (hardware, software and materials), and the physical and social **environments** in which a **product** is used. [[ISO/IEC 25000](#)]

See also

Glossary:

- [Environment](#)

Standards:

- [ISO/IEC 25000](#)

Contract

Binding agreement between two parties, especially enforceable by law, or a similar internal agreement wholly within an organization. [[ISO/IEC 12207](#)]

Other Definitions

Contract [[IEEE 1490](#)]: A mutually binding agreement that obligates the seller to provide the specified product or service or result and obligates the buyer to pay for it.

See also

Standards:

- [IEEE 1490](#)
- [ISO/IEC 12207](#)

Control Coupling

A type of **coupling** in which one software module communicates information to another module for the explicit purpose of influencing the latter module's execution. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Content Coupling](#)
- [Coupling](#)
- [Data Coupling](#)
- [Hybrid Coupling](#)
- [Pathological Coupling](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Control Flow

The sequence in which operations are performed during the execution of a computer program. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Control Flow Diagram](#)
- [Data Flow](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Control Flow Diagram

A diagram that depicts the set of all possible sequences in which operations may be performed during the execution of a system or program. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Control Flow](#)
- [Data Flow Diagram](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Convention

Requirement employed to prescribe a disciplined, uniform approach to providing consistency in a **software product**, that is, a uniform pattern or form for arranging **data**. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Correctability

The degree of effort required to correct software **defects** and to cope with user complaints. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Maintainability](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Correctness

The degree to which a **system** or **component** is free from faults in its specification, design, and implementation. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Correctness [[ISO/IEC/IEEE 24765](#)]: The degree to which software, documentation, or other items meet specified requirements.

Correctness [[ISO/IEC/IEEE 24765](#)]: The degree to which software, documentation, or other items meet user needs and expectations, whether specified or not.

See also

Glossary:

- [Fault](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Coupling

The manner and degree of interdependence between software modules. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Coupling [[ISO/IEC 19759](#)]: The strength of the relationships between modules.

Coupling [[ISO/IEC/IEEE 24765](#)]: A measure of how closely connected two routines or modules are.

Coupling [[ISO/IEC/IEEE 24765](#)]: In software design, a measure of the interdependence among modules in a computer program

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Cohesion](#)
- [Control Coupling](#)
- [Data Coupling](#)

Standards:

- [ISO/IEC 19759](#)
- [ISO/IEC/IEEE 24765](#)

Coverage

The degree, expressed as a percentage, to which a specified coverage item has been exercised by a [test case suite](#). [[SIGIST](#)]

Other Definitions

Test Coverage [[ISO/IEC 12207](#)]: Extent to which the test cases test the requirements for the system or software product.

test Coverage [[ISO/IEC/IEEE 24765](#)]: The degree to which a given test or set of tests addresses all specified requirements for a given system or

component.

See also

Glossary:

- [Code Coverage](#)
- [Test Case](#)
- [Test Case Suite](#)

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC/IEEE 24765](#)
- [SIGIST](#)

Criteria

Specific data items identified as contents of information items for appraising a factor in an evaluation, audit, test or review. [[ISO/IEC 15289](#)]

Other Definitions

Criteria [[ISO/IEC 15289](#)]: standards, rules, or tests on which a judgment or decision can be based, or by which a product, service, result, or process can be evaluated.

See also

Glossary:

- [Certification Criteria](#)
- [Decision Criteria](#)

Standards:

- [ISO/IEC 15289](#)

Criticality

The degree to which a [system](#) or [component](#) is operational and accessible when required for use. [[IEEE 829](#)]

See also

Standards:

- [IEEE 829](#)

Custom Software

[Software product](#) developed for a specific application from a user requirements specification. [[ISO/IEC 25000](#)]

See also

Glossary:

- [Product](#)
- [Requirement](#)

Standards:

- [ISO/IEC 25000](#)

Customer

Organization or person that receives a product or service. [[ISO/IEC 12207](#), [ISO/IEC 15288](#)]

Other Definitions

Customer [[IEEE 1233](#)]: The entity or entities for whom the requirements are to be satisfied in the system being defined and developed.

Customer [[IEEE 1362](#)]: An individual or organization who acts for the ultimate user of a new or modified hardware or software product to acquire the product and its documentation.

Customer [[IEEE 830](#)]: The person, or persons, who pay for the product and usually (but not necessarily) decide the requirements.

Notes

- [acquirer](#)
- [ISO/IEC/IEEE 24765](#)
- [ISO/IEC/IEEE 24765](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Stakeholder](#)

Standards:

- [IEEE 830](#)
- [IEEE 1233](#)
- [IEEE 1362](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC/IEEE 24765](#)

Data

Collection of values assigned to [base measures](#), [derived measures](#), and/or [indicators](#). [[ISO/IEC 15939](#), [ISO/IEC 25000](#)]

Other Definitions

Data [[ISO/IEC/IEEE 24765](#)]: A representation of facts, concepts, or instructions in a manner suitable for communication, interpretation, or processing by humans or by automatic means.

Data [[ISO/IEC 2382-1](#)]: A reinterpretable representation of information in a formalized manner suitable for communication, interpretation, or communication, or processing.

See also

Glossary:

- [Base Measure](#)
- [Derived Measure](#)
- [Indicator](#)

Standards:

- [ISO/IEC 2382-1](#)
- [ISO/IEC 15939](#)
- [ISO/IEC 25000](#)
- [ISO/IEC/IEEE 24765](#)

Data Coupling

A type of **coupling** in which output from one software module serves as input to another module. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Content Coupling](#)
- [Control Coupling](#)
- [Coupling](#)
- [Hybrid Coupling](#)
- [Pathological Coupling](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Data Flow

The sequence in which **data** transfer, use, and transformation are performed during the execution of a computer program. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Control Flow](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Data Flow Diagram

A diagram that depicts data sources, data sinks, data storage, and processes performed on **data** as nodes, and logical **flow of data** as links between the nodes. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Data Flow](#)
- [Control Flow Diagram](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Data Management

In a data processing system, the functions that provide access to [data](#), perform or monitor the storage of data, and control input-output operations. [[ISO/IEC 2382-1](#)]

Other Definitions

Data Management [[ISO/IEC/IEEE 24765](#)]: The disciplined processes and systems that plan for, acquire, and provide stewardship for business and technical data, consistent with data requirements, throughout the data lifecycle.

See also

Glossary:

- [Data](#)

Standards:

- [ISO/IEC 2382-1](#)
- [ISO/IEC/IEEE 24765](#)

Data Model

A model about [data](#) by which an interpretation of the data can be obtained in the modeling tool industry. [[ISO/IEC 15474-1](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Data](#)
- [Model](#)

Standards:

- [ISO/IEC 15474-1](#)
- [ISO/IEC/IEEE 24765](#)

Data Processing

The systematic performance of operations upon [data](#). [[ISO/IEC 2382-1](#)]

Notes

- [ISO/IEC/IEEE 24765](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Data](#)

Standards:

- [ISO/IEC 2382-1](#)
- [ISO/IEC/IEEE 24765](#)

Data Provider

Individual or organisation that is a source of [data](#). [[ISO/IEC 15939](#)]

See also

Standards:

- [ISO/IEC 15939](#)

Data Store

Organised and persistent collection of [data](#) and information that allows for its retrieval. [[ISO/IEC 15939](#)]

See also

Standards:

- [ISO/IEC 15939](#)

Data Type

A class of [data](#), characterized by the members of the class and the operations that can be applied to them. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Data](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Database

A collection of [data](#) organized according to a conceptual structure describing the characteristics of the data and the relationships among their corresponding entities, supporting one or more application areas. [[ISO/IEC 2382-1](#)]

Other Definitions

Database [[ISO/IEC/IEEE 24765](#)]: A collection of interrelated data stored together in one or more computerized files.

Database [[ISO/IEC 29881](#)]: Collection of data describing a specific target area that is used and updated by one or more applications.

See also

Glossary:

- [Data](#)
- [Data Store](#)

Standards:

- [ISO/IEC 2382-1](#)
- [ISO/IEC 29881](#)
- [ISO/IEC/IEEE 24765](#)

Decision Criteria

Thresholds, targets, or patterns used to determine the need for action or further investigation, or to describe the level of confidence in a given result. [[ISO/IEC 15939](#), [ISO/IEC 25000](#)]

See also

Glossary:

- [Criteria](#)

Standards:

- [ISO/IEC 15939](#)
- [ISO/IEC 25000](#)

Decoupling

The process of making software modules more independent of one another to decrease the impact of changes to, and errors in, the individual modules. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Coupling](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Defect

A flaw in a system or system component that causes the system or component to fail to perform its required function. A defect, if encountered during execution, may cause a [failure](#) of the system. [[CMMi](#)]

Other Definitions

Defect [[IEEE 1490](#)]: An imperfection or deficiency in a project component where that component does not meet its requirements or specifications and needs to be either repaired or replaced.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Failure](#)
- [Fault](#)
 - Defect Density

Standards:

- [CMMi](#)
- [IEEE 1490](#)

Degree of Confidence

The degree of confidence that software conforms to its requirements. [[ISO/IEC 15026](#)]

See also

Standards:

- [ISO/IEC 15026](#)

Deliverable

Items whose delivery to the **customer** is a **requirement** of the **contract**. [[ISO/IEC 15910](#)]

Other Definitions

Deliverable [[IEEE 1490](#)]: Any unique and verifiable product, result, or capability to perform a service that must be produced to complete a process, phase, or project. Often used more narrowly in reference to an external deliverable, which is a deliverable that is subject to approval by the project sponsor or customer.

Deliverable [[ISO/IEC/IEEE 24765](#)]: Item [3: This item can be a document, hardware item, software item, service, or any type of work product.] to be provided to an acquirer or other designated recipient as specified in an agreement.

Deliverables [[ISO/IEC 15910](#)]: Items whose delivery to the customer is a requirement of the contract.

See also

Glossary:

- [Software Product](#)

Standards:

- [IEEE 1490](#)
- [ISO/IEC 15910](#)
- [ISO/IEC/IEEE 24765](#)

Delivery

Release of a **system** or **component** to its **customer** or intended **user**. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Deliverable](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Dependability

Measure of the degree to which an item is operable and capable of performing its required function at any (random) time during a specified mission profile, given item availability at the start of the mission. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Dependability [[IEEE 982](#)]: Trustworthiness of a computer system such that reliance can be justifiably placed on the service it delivers.

Notes

- [Reliability](#)
- [availability](#)
- [maintainability](#)
- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [IEEE 982](#)
- [ISO/IEC/IEEE 24765](#)

Deployment

Phase of a project in which a system is put into operation and cutover issues are resolved. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Derived Measure

Measure that is defined as a function of two or more values of **base measures**. [[ISO/IEC 99](#), [ISO/IEC 15939](#), [ISO/IEC 25000](#)]

Notes

- [ISO/IEC 15939](#)
- [ISO/IEC 25000](#)

See also

Glossary:

- [Measure](#)
- [Base Measure](#)
- [Direct Measure](#)
- [Indirect Measure](#)

Standards:

- [ISO/IEC 99](#)
- [ISO/IEC 15939](#)
- [ISO/IEC 25000](#)

Design

The process of defining the architecture, components, interfaces, and other characteristics of a system or component. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Design [[ISO/IEC/IEEE 24765](#)]: The result of the process of defining the architecture, components, interfaces, and other characteristics of a system or component.

Design [[ISO/IEC/IEEE 24765](#)]: The process of defining the software architecture, components, modules, interfaces, and data for a software system to satisfy specified requirements.

Design [[ISO/IEC/IEEE 24765](#)]: The process of conceiving, inventing, or contriving a scheme for turning a computer program specification into an operational program.

Design [[ISO/IEC/IEEE 24765](#)]: Activity that links requirements analysis to coding and debugging.

Design [[ISO/IEC 26514](#)]: Stage of documentation development that is concerned with determining what documentation will be provided in a product and what the nature of the documentation will be.

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Design Pattern

A description of the problem and the essence of its solution to enable the solution to be reused in different settings. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Developer

Individual or organisation that performs development activities (including requirements analysis, design, testing through acceptance) during the software lifecycle process. [[ISO/IEC 12207](#), [ISO/IEC 9126-1](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC 9126-1](#)
- [ISO/IEC 12207](#)
- [ISO/IEC/IEEE 24765](#)

Development

Software life cycle process that contains the activities of requirements analysis, design, coding, integration, testing, installation and support for acceptance of software products. [[ISO/IEC 90003](#), [ISO/IEC 12207](#), [ISO/IEC 15939](#)]

Other Definitions

Development [[ISO/IEC 26514](#)]: Activity of preparing documentation after it has been designed.

See also

Glossary:

- [Developer](#)
- [Development Testing](#)
- [Process](#)
- [Software Life Cycle](#)

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 15939](#)
- [ISO/IEC 26514](#)
- [ISO/IEC 90003](#)

Development Testing

Formal or informal testing conducted during the development of a system or component, usually in the development environment by the developer. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Development Testing [[IEEE 829](#)]: Testing conducted to establish whether a new software product or software-based system (or components of it) satisfies its criteria.

See also

Glossary:

- [Acceptance Testing](#)
- [Qualification Testing](#)
- [Operational Testing](#)
- [Testing](#)

Standards:

- [IEEE 829](#)
- [ISO/IEC/IEEE 24765](#)

Direct Measure

A [measure](#) of an [attribute](#) that does not depend upon a measure of any other attribute. [[ISO/IEC 14598](#), [ISO/IEC 9126-1](#)]

See also

Glossary:

- [Base Measure](#)
- [Derived Measure](#)
- [Indirect Measure](#)
- [Measure](#)

Papers:

[Software Engineering Metrics: What Do They Measure And How Do We Know](#)

Standards:

- [ISO/IEC 9126-1](#)
- [ISO/IEC 14598](#)

Direct Metric

A [metric](#) that does not depend upon a [measure](#) of any other [attribute](#). [[IEEE 1061](#)]

See also

Glossary:

- [Direct Measure](#)
- [Indirect Metric](#)
- [Metric](#)

Standards:

- [IEEE 1061](#)

Document

Uniquely identified unit of information for human use, such as a report, specification, manual or book, in printed or electronic form. [[ISO/IEC 9294](#)]

Other Definitions

Document (verb) [[ISO/IEC/IEEE 24765](#)]: To add comments to a computer program.

Document [[ISO/IEC 15910](#)]: An item of documentation.

Document [[ISO/IEC 20000](#)]: Information and its supporting medium.

Document [[ISO/IEC 26514](#)]: Separately identified piece of documentation which could be part of a documentation set.

Notes

- [ISO/IEC/IEEE 24765](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Documentation](#)
- [Installation Manual](#)
- [Maintenance Manual](#)
- [Operator Manual](#)
- [Support Manual](#)
- [User Manual](#)

Standards:

- [ISO/IEC 9294](#)
- [ISO/IEC 15910](#)
- [ISO/IEC 20000](#)
- [ISO/IEC 26514](#)
- [ISO/IEC/IEEE 24765](#)

Documentation

Collection of related [documents](#) that are designed, written, produced and maintained. [[ISO/IEC 9294](#)]

Other Definitions

Documentation [[ISO/IEC 26514](#)]: Information that explains how to use a [software product](#).

Documentation [[IEEE 829](#)]:

1.
 - documents
2.
 - activities
 - requirements
 - procedures
3.
 - document
4.
 - documents

Examples

- [ISO/IEC 26514](#)

Notes

- [ISO/IEC 26514](#)

See also

Glossary:

- [Document](#)
- [Installation Manual](#)
- [Maintenance Manual](#)
- [Operator Manual](#)
- [Programmer Manual](#)
- [Support Manual](#)
- [Test Documentation](#)
- [User Documentation](#)
- [User Manual](#)

Standards:

- [IEEE 829](#)
- [ISO/IEC 9294](#)
- [ISO/IEC 26514](#)

Dynamic Analysis

The process of evaluating a system or component based on its behavior during execution. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Testing](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Earned Value

The value of work performed expressed in terms of the approved budget assigned to that work for a schedule activity or work breakdown structure component. [[IEEE 1490](#)]

See also

Standards:

- [IEEE 1490](#)

Effectiveness

The capability of the software product to enable users to achieve specified goals with [accuracy](#) and completeness in a specified context of use. [[ISO/IEC 9126-1](#)]

Other Definitions

Effectiveness [[ISO/IEC 25062](#)]: The accuracy and completeness with which users achieve specified goals.

See also

- [ISO/IEC 9126-1](#)

Efficiency

Resources expended in relation to the accuracy and completeness with which users achieve goals. [[ISO/IEC 25062](#)]

Other Definitions

Efficiency [[IEEE 610.12](#), [ISO/IEC/IEEE 24765](#)]: The degree to which a system or component performs its designated functions with minimum consumption of resources.

Efficiency [[ISO/IEC 9126-1](#)]: The capability of the software product to provide appropriate performance, relative to the amount of resources used, under stated conditions.

Notes

- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Efficiency Compliance](#)

Standards:

- [IEEE 610.12](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC/IEEE 24765](#)
- [ISO/IEC 25062](#)

Efficiency Compliance

The capability of the software product to adhere to standards or conventions relating to efficiency. [[ISO/IEC 9126-1](#)]

See also

Glossary:

- [Efficiency](#)

Standards:

- [ISO/IEC 9126-1](#)

Effort

The number of labor units required to complete a schedule activity or work breakdown structure component. Usually expressed as staff hours, staff days, or staff weeks. [[IEEE 1490](#)]

See also

Standards:

- [IEEE 1490](#)

Encapsulation

A software development technique that consists of isolating a system function or a set of data and operations on those data within a module and providing precise specifications for the module. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Encapsulation [[IEEE 1320](#)]: The concept that access to the names, meanings, and values of the responsibilities of a class is entirely separated from access to their realization.

Encapsulation [[ISO/IEC/IEEE 24765](#)]: The idea that a module has an outside that is distinct from its inside, that it has an external interface and an internal implementation.

See also

Standards:

- [IEEE 1320](#)
- [ISO/IEC/IEEE 24765](#)

End User

Individual person who ultimately benefits from the outcomes of the system. [[ISO/IEC 25000](#)]

Other Definitions

End User [[IEEE 1233](#)]: The person or persons who will ultimately be using the system for its intended purpose. [[IEEE 1233](#)]

End User [[ISO 9127](#)]: The person who uses the software package.

End User [[ISO/IEC 29881](#)]: Any person that communicates or interacts with the software at any time.

See also

Standards:

- [IEEE 1233](#)
- [ISO 9127](#)
- [ISO/IEC 25000](#)
- [ISO/IEC 29881](#)

Entity

Object [4: An object can be a process, product, project, or resource.] that is to be characterised by [measuring its attributes](#). [[ISO/IEC 15939](#), [ISO/IEC 25000](#)]

Other Definitions

Entity [[IEEE 1320](#)]: The representation of a set of real or abstract things that are recognized as the same type because they share the same characteristics and can participate in the same relationships.

Entity [[ISO/IEC 15474](#)]: An object (i.e., thing, event or concept) that occurs in a model (i.e., transfer).

Entity [[ISO/IEC/IEEE 24765](#)]: In computer programming, any item that can be named or denoted in a program.

Entity [[ISO/IEC 29881](#)]: Logical component of the data store, representing fundamental things of relevance to the user, and about which persistent information is stored.

Examples

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [IEEE 1320](#)
- [ISO/IEC 15474](#)

- [ISO/IEC 15939](#)
- [ISO/IEC/IEEE 24765](#)
- [ISO/IEC 25000](#)
- [ISO/IEC 29881](#)

Entry Point

A point in a software module at which execution of the module can begin. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Exit](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Environment

The configuration(s) of hardware and software in which the software operates. [[ISO 9127](#)]

Other Definitions

Environment [[IEEE 1362](#)]: The circumstances, objects, and conditions that surround a system to be built.

Environment [[IEEE 1233](#)]: The circumstances, objects, and conditions that will influence the completed system.

Environment [[IEEE 1320](#)]: A concept space, i.e., an area in which a concept has an agreed-to meaning and one or more agreed-to names that are used for the concept.

See also

Standards:

- [IEEE 1233](#)
- [IEEE 1320](#)
- [IEEE 1362](#)
- [ISO 9127](#)

Error

A human action that produces an incorrect result, such as software containing a **fault**. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Error [[ISO/IEC/IEEE 24765](#)]:

1. An incorrect step, process, or data definition.
2. An incorrect result
3. The difference between a computed, observed, or measured value or condition and the true, specified, or theoretically correct value or condition.

Notes

- Example: omission or misinterpretation of user requirements in a software specification, incorrect translation, or

omission of a requirement in the design specification. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Defect](#)
- [Failure](#)
- [Fault](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Error Tolerance

The ability of a [system](#) or [component](#) to continue normal operation despite the presence of erroneous inputs. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Fault Tolerance](#)
- [Robustness](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Evaluation

Systematic determination of the extent to which an entity meets its specified [criteria](#). [[ISO/IEC 12207](#)]

Other Definitions

Evaluation [[ISO/IEC 15414](#)]: An action that assesses the value of something.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Evaluation Activity](#)
- [Evaluation Group](#)
- [Evaluation Method](#)
- [Evaluation Module](#)
- [Evaluation Technology](#)

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 15414](#)
- [ISO/IEC/IEEE 24765](#)

Evaluation Activity

Assessment of a [software product](#) against identified and applicable quality characteristics performed using applicable [techniques](#) or methods. [[ISO/IEC 25001](#)]

See also

Glossary:

- [Evaluation](#)
- [Evaluation Group](#)
- [Evaluation Method](#)
- [Evaluation Module](#)
- [Evaluation Technology](#)

Standards:

- [ISO/IEC 25001](#)

Evaluation Group

Organization responsible for specifying the [software quality requirements](#) as well as managing and implementing the [software quality evaluation](#) activities through the provision of technology, tools, experiences, and management skills. [[ISO/IEC 25001](#)]

See also

Glossary:

- [Evaluation](#)

- [Evaluation Activity](#)
- [Evaluation Method](#)
- [Evaluation Module](#)
- [Evaluation Technology](#)

Standards:

- [ISO/IEC 25001](#)

Evaluation Method

Procedure describing **actions** to be performed by the evaluator in order to obtain results for the specified **measurement** applied to the specified product components or on the product as a whole. [[ISO/IEC 25000](#)]

See also

Glossary:

- [Evaluation](#)
- [Evaluation Activity](#)
- [Evaluation Group](#)
- [Evaluation Module](#)
- [Evaluation Technology](#)

Standards:

- [ISO/IEC 25000](#)

Evaluation Module

A package of evaluation technology for a specific **software quality characteristic** or sub-characteristic. [[ISO/IEC 9126-1](#), [ISO/IEC 14598](#)]

Notes

- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Evaluation](#)
- [Evaluation Activity](#)
- [Evaluation Group](#)
- [Evaluation Method](#)
- [Evaluation Technology](#)

Standards:

- [ISO/IEC 9126-1](#)
- [ISO/IEC 14598](#)

Evaluation Technology

Technique, processes, tools, measures and relevant technical information used for [evaluation](#). [[ISO/IEC 25001](#)]

See also

Glossary:

- [Evaluation](#)
- [Evaluation Activity](#)
- [Evaluation Group](#)
- [Evaluation Method](#)
- [Evaluation Module](#)

Standards:

- [ISO/IEC 25001](#)

Evaluation Tool

An instrument that can be used during [evaluation](#) to collect [data](#), to perform interpretation of [data](#) or to automate part of the [evaluation](#). [[ISO/IEC 14598-5](#)]

See also

Glossary:

- [Evaluation](#)

Standards:

- [ISO/IEC 14598-5](#)

Execute

To carry out an instruction, process, or computer program. [[IEEE 1490](#)]

Other Definitions

Execute [[IEEE 1490](#)]: Directing, managing, performing, and accomplishing the project work, providing the deliverables, and providing work performance information.

See also

Standards:

- [IEEE 1490](#)

Execution Efficiency

The degree to which a system or component performs its designated functions with minimum consumption of time. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Efficiency](#)
- [Execution Time](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Execution Time

The time which elapses between task submission and completion. [[ISO/IEC 14756](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Execution Efficiency](#)

Standards:

- [ISO/IEC 14756](#)
- [ISO/IEC/IEEE 24765](#)

Exit

A point in a software module at which execution of the module can terminate. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Entry Point](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Expandability

The degree of effort required to improve or modify software functions' **efficiency**. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Extendability

The ease with which a **system** or **component** can be modified to increase its storage or functional capacity. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Expandability](#)
- [Flexibility](#)
- [Maintainability](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

External Attribute

A measurable property of an **entity** which can only be derived with respect to how it relates to its **environment**. [[ISO/IEC 14598-3](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Internal Attribute](#)

Standards:

- [ISO/IEC 14598](#)

External Measure

An **indirect measure** of a product derived from measures of the behaviour of the **system** of which it is a part. [[ISO/IEC 9126-1](#), [ISO/IEC 14598](#)]

Notes

- [ISO/IEC 9126-1](#)
- [failures](#)
- [faults](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Base Measure](#)
- [Derived Measure](#)
- [Direct Measure](#)
- [Indirect Measure](#)
- [Internal Measure](#)
- [Measure](#)

Standards:

- [ISO/IEC 14598](#)
- [ISO/IEC 9126-1](#)

External Quality

The extent to which a **product** satisfies stated and **implied needs** when used under specified conditions. [[ISO/IEC 9126-1](#), [ISO/IEC 14598](#)]

Notes

- [software product](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- [External Software Quality](#)
- [Internal Quality](#)
- [Quality](#)
- [Quality in Use](#)

Standards:

- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-2](#)

- [ISO/IEC 14598](#)

External Software Quality

Capability of a **software product** to enable the behavior of a **system** to satisfy stated and **implied needs** when the system is used under specified conditions. [[ISO/IEC 25000](#)]

Notes

- [failures](#)
- [quality measure](#)
- [faults](#)
- [ISO/IEC/IEEE 24765](#)
- [software product](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [External Quality](#)
- [Internal Software Quality](#)

Standards:

- [ISO/IEC 25000](#)
- [ISO/IEC/IEEE 24765](#)

Facility

Physical means or equipment for facilitating the performance of an action. [[ISO/IEC 12207](#), [ISO/IEC 15288](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC/IEEE 24765](#)

Failure

The termination of the ability of a **product** to perform a required function or its inability to

perform within previously specified limits. [[ISO/IEC 9126-1](#), [ISO/IEC 14598-5](#), [ISO/IEC 25000](#)]

Other Definitions

Failure [[SIGIST](#)]: Deviation of the software from its expected delivery or service.

Failure [[IEEE 610.12](#)]: The inability of a system or component to perform its required functions within specified performance requirements.

Failure [[ISO/IEC/IEEE 24765](#)]: An event in which a system or system component does not perform a required function within specified limits.

Notes

+ [5: J. C. Laprie (Ed.). Dependability: Basic Concepts and Terminology. Springer-Verlag, Wein, New York, 1992.]

+

- [fault tolerance](#)
- [IEEE 610.12](#)

See also

Glossary:

- [Defect](#)
- [Fault](#)
- [Fault Tolerance](#)

Standards:

- [IEEE 610.12](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 14598-5](#)
- [ISO/IEC 25000](#)
- [ISO/IEC/IEEE 24765](#)
- [SIGIST](#)

Failure Rate

The ratio of the number of [failures](#) of a given category to a given unit of measure. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Defect Density](#)

- [Failure](#)

Standards:

- [IEEE 829](#)

Fault

An incorrect step, process or data definition in a computer program. [[IEEE 610.12](#), [ISO/IEC 9126-1](#)]

Other Definitions

Fault [[RTCA/EUROCAE](#)]: A manifestation of an error in software. A fault, if encountered may cause a [failure](#).

Fault [[ISO/IEC/IEEE 24765](#)]:

1. a manifestation of an error in software.
2. an incorrect step, process, or data definition in a computer program.
3. a defect in a hardware device or component.

See also

Glossary:

- [Defect](#)
- [Failure](#)

Standards:

- [IEEE 610.12](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC/IEEE 24765](#)
- [RTCA/EUROCAE](#)

Fault Tolerance

The capability of the software product to maintain a specified level of performance in cases of software [faults](#) or of infringement of its specified interface. [[ISO/IEC 9126-1](#)]

Other Definitions

Fault Tolerance [[IEEE 610.12](#)]:

1. The ability of a system or component to continue normal operation despite the presence of hardware or software faults.
2. The number of faults a system or component can withstand before normal operation is impaired.
3. Pertaining to the study of errors, faults, and failures, and of methods for enabling systems to continue normal operation in the presence of faults.

Notes

- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Fault](#)
- [Reliability](#)

Standards:

- [ISO/IEC 9126-1](#)
- [IEEE 610.12](#)

Feasibility

The degree to which the requirements, design, or plans for a system or component can be implemented under existing constraints. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Feature

Distinguishing characteristic of a system item. [[IEEE 829](#)]

Notes

- [performance](#)
- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [IEEE 829](#)
- [ISO/IEC/IEEE 24765](#)

Feature Freeze

A period during which no new [features](#) are added to a specific branch. [[IEEE 829](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Code Freeze](#)
- [Feature](#)

Standards:

- [IEEE 829](#)
- [ISO/IEC/IEEE 24765](#)

Finite State Machine

A computational model consisting of a finite number of states and transitions between those states, possibly with accompanying actions. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Flexibility

The ease with which a system or **component** can be modified for use in applications or environments other than those for which it was specifically designed. [[ISO/IEC/IEEE 24765](#), [IEEE 610.12](#)]

See also

Glossary:

- [Adaptability](#)
- [Changeability](#)

Standards:

- [ISO/IEC/IEEE 24765](#)
- [IEEE 610.12](#)

Frozen Branch

A branch where no development takes place, either in preparation for a release or because active development has ceased on it. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Function

A software module that performs a specific **action**, is invoked by the appearance of its name in an expression, may receive input values, and returns a single value. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Function [[IEEE 1233](#)]: A **task**, **action**, or **activity** that must be accomplished to achieve a desired outcome.

Function [[IEEE 1320](#)]: A transformation of inputs to outputs, by means of some mechanisms, and subject to certain controls, that is identified by a function name and modeled by a box.

Function [[ISO/IEC 26514](#)]: Part of an application that provides facilities for users to carry out their **tasks**.

Function [[ISO/IEC/IEEE 24765](#)]: A defined objective or characteristic action of a **system** or **component**.

See also

Glossary:

- [Routine](#)

Standards:

- [IEEE 1233](#)
- [IEEE 1320](#)
- [ISO/IEC 26514](#)
- [ISO/IEC/IEEE 24765](#)

Functional Analysis

A systematic investigation of the **functions** of a real or planned system. [[ISO/IEC 2382-1](#)]

Other Definitions

Functional Analysis [[ISO/IEC/IEEE 24765](#)]: Examination of a defined function to identify all the sub-functions necessary to accomplish that function, to identify functional relationships and interfaces (internal and external) and capture these in a functional architecture, to flow down upper-level performance requirements and to assign these requirements to lower-level sub-functions.

See also

Standards:

- [ISO/IEC 2382-1](#)
- [ISO/IEC/IEEE 24765](#)

Functional Requirement

A statement that identifies what a product or process must accomplish to produce required behavior and/or results. [[IEEE 1220](#)]

Other Definitions

Model [[ISO/IEC/IEEE 24765](#)]: A requirement that specifies a function that a system or system component must be able to perform.

See also

Glossary:

- [Nonfunctional Requirement](#)
- [Requirement](#)

Standards:

- [IEEE 1220](#)
- [ISO/IEC/IEEE 24765](#)

Functional Size

A size of the software derived by quantifying the functional user requirements. [[ISO/IEC 14143-1](#)]

See also

Standards:

- [ISO/IEC 14143](#)

Functional Testing

Testing that ignores the internal mechanism of a **system** or **component** and focuses solely on the outputs generated in response to selected inputs and execution conditions. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Performance Testing](#)
- [Structural Testing](#)
- [Testing](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Functional Unit

An entity of hardware or software, or both, capable of accomplishing a specified purpose. [[ISO/IEC 2382-1](#)]

See also

Standards:

- [ISO/IEC 2382-1](#)

Functionality

The capability of the [software product](#) to provide functions which meet stated and [implied needs](#) when the software is used under specified conditions. [[ISO/IEC 9126-1](#)]

Other Definitions

Functionality [[IEEE 1362](#)]: The capabilities of the various computational, user interface, input, output, data management, and other features provided by a [product](#).

Notes

- [ISO/IEC 9126](#)
- [ISO/IEC 9126-1](#)
- [reliability](#)
- [usability](#)
- [efficiency](#)
- [quality in use](#)
- [ISO/IEC 9126-1](#)

See also

Standards:

- [IEEE 1362](#)
- [ISO/IEC 9126-1](#)

Functionality Compliance

The capability of the software product to adhere to standards, conventions or regulations in laws and similar prescriptions relating to functionality. [[ISO/IEC 9126-1](#)]

See also

Glossary:

- [Functionality](#)

Standards:

- [ISO/IEC 9126-1](#)

Generality

The degree to which a [system](#) or [component](#) performs a broad range of [functions](#). [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Generic Practice

An activity that, when consistently performed, contributes to the achievement of a specific process attribute. [[ISO/IEC 15504](#)]

See also

Standards:

- [ISO/IEC 15504](#)

Glossary

The collection of the names and narrative descriptions of all terms that may be used for defined concepts within an environment. [[IEEE 1320](#)]

See also

Standards:

- [IEEE 1320](#)

Goal

Intended outcome of [user](#) interaction with a [product](#). [[ISO/IEC 25062](#)]

Other Definitions

Goal [[ISO/IEC 9126-4](#)]: An intended outcome.

See also

Standards:

- [ISO/IEC 9126](#)
- [ISO/IEC 25062](#)

Granularity

The depth or level of detail at which data is collected. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Historical Information

Documents and data on prior projects including project files, records, correspondence, closed contracts, and closed projects. [[IEEE 1490](#)]

See also

Standards:

- [IEEE 1490](#)

Hybrid Coupling

A type of [coupling](#) in which different subsets of the range of values that a data item can assume are used for different and unrelated purposes in different software modules. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Coupling](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Impact Analysis

Identification of all system and software products that a change request affects and development of an estimate of the resources needed to accomplish the change. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Implementation

The process of translating a design into hardware components, software components, or both. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Implementation [ISO/IEC/IEEE 24765](#)]: The installation and customization of packaged software.

Implementation [ISO/IEC/IEEE 24765](#)]: Construction.

Implementation [ISO/IEC 2382](#)]: The system development phase at the end of which the hardware, software and procedures of the system considered become operational.

Implementation [ISO/IEC 26514](#)]: Phase of development during which user documentation is created according to the design, tested, and revised.

See also

Glossary:

- [Coding](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Implied Needs

Needs that may not have been stated but are actual needs. [[ISO/IEC 25000](#)]

Other Definitions

Implied Needs [[ISO/IEC 9126-1](#), [ISO/IEC 14598-1](#)]: Needs that may not have been stated but are actual needs when the entity is used in particular conditions.

Notes

- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Requirement](#)

Standards:

- [ISO/IEC 9126-1](#)
- [ISO/IEC 14598-1](#)
- [ISO/IEC 25000](#)

Incremental Development

A software development technique in which requirements definition, design, implementation, and testing occur in an overlapping, iterative (rather than sequential) manner, resulting in incremental completion of the overall software product. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Indicator

Measure that provides an estimate or evaluation of specified attributes derived from a model with respect to defined **information needs**. [[ISO/IEC 15939](#), [ISO/IEC 25000](#)]

Other Definitions

Indicator [[ISO/IEC 9126-1](#), [ISO/IEC 14598-1](#)]: A **measure** that can be used to estimate or predict another measure.

Notes

- [ISO/IEC/IEEE 24765](#)
- [ISO/IEC 9126-1](#)
- [indirect measures](#)
- [attributes](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Indicator Value](#)

Standards:

- [ISO/IEC 9126-1](#)
- [ISO/IEC 15939](#)

Indicator Value

Numerical or categorical result assigned to an indicator. [[ISO/IEC 15939](#)]

See also

Glossary:

- [Indicator](#)

Standards:

- [ISO/IEC 15939](#)

Indirect Measure

A measure of an [attribute](#) that is derived from measures of one or more other attributes. [[ISO/IEC 14598](#)]

Notes

- [external measure](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Base Measure](#)
- [Derived Measure](#)
- [Direct Measure](#)
- [External Measure](#)
- [Internal Measure](#)

Papers:

[Software Engineering Metrics: What Do They Measure And How Do We Know](#)

Standards:

- [ISO/IEC 14598](#)
- [ISO/IEC 9126-1](#)

Indirect Metric

An Indirect Metric is a [metric](#) that is derived from one or more other metrics. [[IEEE 1061](#)]

See also

Glossary:

- [Direct Metric](#)
- [Metric](#)

Standards:

- [IEEE 1061](#)

Information

An information processing, knowledge concerning objects, such as facts, events, things, processes, or ideas, including concepts, that within a certain context has a particular meaning. [[ISO/IEC 2382-1](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Information Analysis](#)

Standards:

- [ISO/IEC 2382-1](#)
- [ISO/IEC/IEEE 24765](#)

Information Analysis

A systematic investigation of [information](#) and its flow in a real or planned system. [[ISO/IEC 2382-1](#)]

See also

Glossary:

- [Information](#)

Standards:

- [ISO/IEC 2382-1](#)

Information Management

In an information processing system, the functions of controlling the acquisition, analysis, retention, retrieval, and distribution of information. [[ISO/IEC 2382-1](#)]

See also

Glossary:

- [Information](#)

Standards:

- [ISO/IEC 2382-1](#)

Information Need

Insight necessary to manage objectives, goals, risks, and problems. [[ISO/IEC 15939](#)]

See also

- [ISO/IEC 15939](#)

Information Product

One or more [indicators](#) and their associated interpretations that address an [information need](#). [[ISO/IEC 15939](#), [ISO/IEC 25000](#)]

Example

- [ISO/IEC 15939](#)

See also

Glossary:

- [Indicator](#)
- [Information](#)

Standards:

- [ISO/IEC 15939](#)
- [ISO/IEC 25000](#)

Inspection

A static analysis technique that relies on visual examination of development products to detect errors, violations of development standards, and other problems. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Inspection [[IEEE 1490](#)]: Examining or measuring to verify whether an activity, component, product, result, or service conforms to specified requirements.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [IEEE 1490](#)

- [ISO/IEC/IEEE 24765](#)

Installability

The capability of the software product to be installed in a specified environment. [[ISO/IEC 9126-1](#)]

Notes

- [suitability](#)
- [operability](#)
- [ISO/IEC 9126-1](#)

See also

- [ISO/IEC 9126-1](#)

Installation Manual

A [document](#) that provides the information necessary to install a [system](#) or [component](#), set initial parameters, and prepare the [system](#) or [component](#) for operational use. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Document](#)
- [Maintenance Manual](#)
- [Operator Manual](#)
- [Support Manual](#)
- [User Manual](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Integration

The process of combining software components, hardware components, or both into an overall system. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Integration Test

The progressive linking and testing of programs or modules in order to ensure their proper functioning in the complete system. [[ISO/IEC 2382](#)]

See also

Glossary:

- [Integration](#)
- [Testing](#)

Standards:

- [ISO/IEC 2382](#)

Integrity

The degree to which a [system](#) or [component](#) prevents unauthorized access to, or modification of, computer programs or data. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Interface Testing

[Testing](#) conducted to evaluate whether [systems](#) or [components](#) pass data and control correctly to one another. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Integration Test](#)
- [System Testing](#)
- [Testing](#)
- [Unit Test](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Intermediate Software Product

A product of the software development process that is used as input to another stage of the software development process. [[ISO/IEC 14598](#), [ISO/IEC 9126-1](#), [ISO/IEC 25000](#)]

Notes

- [ISO/IEC/IEEE 24765](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Software Product](#)

Standards:

- [ISO/IEC 9126-1](#)
- [ISO/IEC 14598](#)
- [ISO/IEC/IEEE 24765](#)
- [ISO/IEC 25000](#)

Internal Attribute

A measurable property of an entity which can be derived purely in terms of the entity itself. [[ISO/IEC 14598](#), [ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [External Attribute](#)

Standards:

- [ISO/IEC 14598](#)
- [ISO/IEC/IEEE 24765](#)

Internal Measure

A *measure* of the product itself, either *direct* or *indirect*. [[ISO/IEC 14598](#), [ISO/IEC 9126-1](#), [ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- Direct Measure
- External Measure
- Indirect Measure
- Measure

Standards:

- ISO/IEC 14598
- ISO/IEC 9126-1
- ISO/IEC/IEEE 24765

Internal Quality

The totality of **attributes** of a **product** that determine its ability to satisfy stated and **implied needs** when used under specified conditions. [ISO/IEC 9126-1, ISO/IEC/IEEE 24765]

Notes

- ISO/IEC 9126-1
- ISO/IEC 14598
- ISO 8402
- ISO/IEC 9126-1

See also

Glossary:

- External Quality
- Quality in Use

Standards:

- ISO/IEC 9126
- ISO/IEC 9126-1
- ISO/IEC 9126-3
- ISO/IEC 14598
- ISO/IEC/IEEE 24765

Internal Software Quality

Capability of a set of static **attributes** of a **software product** to satisfy stated and **implied needs** when the **software product** is used under specified conditions. [ISO/IEC 25000]

Examples

- ISO/IEC/IEEE 24765

Notes

- [attributes](#)
- [architecture](#)
- [attributes](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [External Software Quality](#)

Standards:

- [ISO/IEC 25000](#)
- [ISO/IEC/IEEE 24765](#)

Interoperability

The capability of the software product to interact with one or more specified systems. [[ISO/IEC 9126-1](#)]

Notes

- [compatibility](#)
- [replaceability](#)
- [ISO/IEC 9126-1](#)

See also

- [ISO/IEC 9126-1](#)

Interoperability Testing

Testing conducted to ensure that a modified system retains the capability of exchanging information with systems of different types, and of using that information. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Testing](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Interval Scale

Scale in which the **measurement** values have equal distances corresponding to equal quantities of the **attribute**. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Scale](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Item

An entity such as a part, component, subsystem, equipment or system that can be individually considered. An item may consist of hardware, software or both. [[ISO/IEC 15026](#)]

See also

Standards:

- [ISO/IEC 15026](#)

Iteration

1. The process of performing a sequence of steps repeatedly.
2.
 - [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Key Practices

The infrastructures and activities that contribute most to the effective implementation and institutionalization of a key process area. [[CMMi](#)]

Notes

In the CMMi process, each key process area is described in terms of the key practices that contribute to satisfying its goals. The key practices describe the infrastructure and activities that contribute most to the effective implementation and institutionalization of the key process area.

Each key practice consists of a single sentence, often followed by a more detailed description, which may include examples and elaboration. These

key practices, also referred to as the top-level key practices, state the fundamental policies, procedures, and activities for the key process area.

The components of the detailed description are frequently referred to as sub-practices.

The key practices describe "what" is to be done, but they should not be interpreted as mandating "how" the goals should be achieved. Alternative practices may accomplish the goals of the key process area. The key practices should be interpreted rationally to judge whether the goals of the key

process area are effectively, although perhaps differently, achieved.

See also

- [CMMi](#)
- [Key Process Area](#)

Key Process Area

A cluster of related [activities](#) that, when performed collectively, achieve a set of goals considered important for establishing process capability. [[CMMi](#)]

Notes

The key process areas have been defined to reside at a single maturity level. They are the areas identified by the [SEI](#) to be the principal building blocks to help determine the software process capability of an organization and understand the improvements needed to advance to higher maturity levels.

- [CMMi](#)
- [Software Configuration Management](#)
- [CMMi](#)
 - The Level 4 key process areas are Quantitative Process Management and Software Quality Management.
 - The Level 5 key process areas are Defect Prevention, Technology Change Management, and Process Change Management.

See also

- [CMMi](#)
- [Key Practices](#)

Knowledge Base

A database that contains inference rules and information about human experience and expertise in a domain. [[ISO/IEC 2382-1](#)]

See also

Standards:

- [ISO/IEC 2382-1](#)

Learnability

The capability of the software product to enable the user to learn its application. [[ISO/IEC 9126-1](#)]

Notes

- [suitability](#)
- [ISO 9241-10](#)
- [ISO/IEC 9126-1](#)

See also

Standards:

- [ISO/IEC 9126-1](#)

Lessons Learned

The learning gained from the process of performing the project. Lessons learned may be identified at any point. Also considered a project record, to be included in the lessons learned knowledge base. [[IEEE 1490](#)]

See also

Glossary:

- [Knowledge Base](#)

Standards:

- [IEEE 1490](#)

Level of Performance

The degree to which the needs are satisfied, represented by a specific set of values for the quality characteristics. [[ISO/IEC 9126-1](#)]

See also

Glossary:

- [Performance](#)
- [Performance Indicator](#)

Standards:

- [ISO/IEC 9126-1](#)

Life Cycle

Evolution of a system, product, service, project or other human-made entity from conception through retirement. [[ISO/IEC 12207](#), [ISO/IEC 15288](#)]

Other Definitions

Life Cycle [[IEEE 1220](#)]: The system or product evolution initiated by a perceived stakeholder need through the disposal of the products.

See also

Glossary:

- [Life Cycle Model](#)

Standards:

- [IEEE 1220](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)

Life Cycle Model

Framework of processes and activities concerned with the life cycle that may be organized into stages, which also acts as a common reference for communication and understanding. [[ISO/IEC 12207](#), [ISO/IEC 15288](#)]

See also

Glossary:

- [Life Cycle](#)

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)

Maintainability

The capability of the [software product](#) to be modified. [[ISO/IEC 9126-1](#), [ISO/IEC 14764](#)]

Other Definitions

Maintainability [[ISO/IEC/IEEE 24765](#)]: The ease with which a software system or component can be modified to change or add capabilities, correct faults or defects, improve performance or other attributes, or adapt to a changed environment.

Maintainability [[ISO/IEC/IEEE 24765](#)]: The average effort required to locate and fix a software failure.

Maintainability [[IEEE 982](#)]: Speed and ease with which a program can be corrected or changed.

Notes

- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Extendability](#)
- [Flexibility](#)
- [Maintainer](#)
- [Maintenance](#)

Standards:

- [IEEE 982](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 14764](#)
- [ISO/IEC/IEEE 24765](#)

Maintainability Compliance

The capability of the [software product](#) to adhere to standards or conventions relating to [maintainability](#). [[ISO/IEC 9126-1](#)]

See also

Glossary:

- [Maintainability](#)

Standards:

- [ISO/IEC 9126-1](#)

Maintainer

Individual or organization that performs [maintenance](#) activities. [[ISO/IEC 25000](#)]

Other Definitions

Maintainer [[ISO/IEC 9126-1](#), [ISO/IEC 12207](#), [ISO/IEC 14598](#)]: An organisation that performs [maintenance](#) activities.

See also

Glossary:

- [Maintainability](#)
- [Maintenance](#)

Standards:

- [ISO/IEC 9126-1](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 14598](#)
- [ISO/IEC 25000](#)

Maintenance

The process of modifying a software system or component after delivery to correct faults, improve performance or other attributes, or adapt to a changed environment. [[IEEE 610.12](#), [ISO/IEC/IEEE 24765](#)]

Other Definitions

Software Maintenance [[ISO/IEC 14764](#)]: The totality of activities required to provide cost-effective support to a software system.

Notes

+ [6: Ian Sommerville, "Software Engineering". Addison-Wesley, 1996.]

+ * * Perfective maintenance - Changes which improve the system in some way without changing its functionality; * * Adaptive maintenance - Maintenance which is required because of changes in the environment of a program; * * Corrective maintenance - The correction of previously undiscovered system errors.

+ [7: Harry M. Sneed & Agnes Kaposi. "A study on the effect of reengineering on maintainability". In Proceedings of the International Conference on Software Maintenance 1990, pages 91-99. IEEE, Computer Society Press 1990.]

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Maintainability](#)
- [Maintainer](#)
- [Maintenance Manual](#)

Standards:

- [IEEE 610.12](#)
- [ISO/IEC 14764](#)
- [ISO/IEC/IEEE 24765](#)

Maintenance Manual

A software engineering project-deliverable [document](#) that enables a system's maintenance personnel (rather than users) to maintain the system. [[ISO/IEC/IEEE 24765](#)]

Notes

- [Support Manual](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Document](#)
- [Installation Manual](#)
- [Operator Manual](#)
- [Support Manual](#)
- [User Manual](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Maturity

The capability of the [software product](#) to avoid [failure](#) as a result of [faults](#) in the software. [[ISO/IEC 9126-1](#)]

See also

Standards:

- [ISO/IEC 9126-1](#)

Measurable Concept

Abstract relationship between attributes of entities and information needs. [[ISO/IEC 15939](#)]

See also

- [ISO/IEC 15939](#)

Measurand

Particular quantity subject to measurement. [[ISO/IEC 14143-3](#), [ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)
- [ISO/IEC 99](#)

See also

Standards:

- [ISO/IEC 99](#)
- [ISO/IEC 14143-3](#)
- [ISO/IEC/IEEE 24765](#)

Measure

Variable to which a **value** is assigned as the result of **measurement**. [[ISO/IEC 15939](#), [ISO/IEC 25000](#)]

Other Definition

Measure (verb) [[ISO/IEC 14598](#), [ISO/IEC 15939](#)]: To make a **measurement**.

Measure [[IEEE 1061](#)]: A way to ascertain or appraise value by comparing it to a norm.

Measure (verb) [[IEEE 1061](#)]: To apply a metric.

Measure [[ISO/IEC 14598](#)]: The number or category assigned to an attribute of an entity by making a measurement.

Measure [[IEEE 982](#)]: The number or symbol assigned to an entity by a mapping from the empirical world to the formal, relational world in order to characterize an attribute.

Measure [[IEEE 982](#)]: The act or process of measuring.

Notes

- **base measures**
- **derived measures**
- **indicators**
- [ISO/IEC 15939](#)

See also

Glossary:

- **Base Measure**
- **Derived Measure**

- [Direct Measure](#)
- [Indicator](#)
- [Indirect Measure](#)
- [Measurement](#)
- [Metric](#)

Papers:

[Software Engineering Metrics: What Do They Measure And How Do We Know](#)

Standards:

- [IEEE 982](#)
- [IEEE 1061](#)
- [ISO/IEC 14598](#)
- [ISO/IEC 15939](#)
- [ISO/IEC 25000](#)

Measurement

Set of operations having the object of determining a **value** of a **measure**. [[ISO/IEC 25000](#)]

Other Definitions

Measurement [[ISO/IEC 99](#), [ISO/IEC 15939](#)]: Set of operations having the object of determining a **value** of a **measure**.

Measurement [[IEEE 1061](#)]: Act or process of assigning a number or category to an entity to describe an attribute of that entity.

Measurement [[ISO/IEC 19759](#)]: The assignment of numbers to objects in a systematic way to represent properties of the object.

Measurement [[ISO/IEC 9126-1](#), [ISO/IEC 14598](#)]: The use of a **metric** to assign a **value** (which may be a number or category) from a **scale** to an **attribute** of an **entity**.

Measurement [[ISO/IEC 19759](#)]: the assignment of values and labels to aspects of software engineering (products, processes, and resources) and the models that are derived from them, whether these models are developed using statistical, expert knowledge or other techniques.

Notes

- [software products](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Measure](#)

Standards:

- [IEEE 1061](#)

- [ISO/IEC 99](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 14598](#)
- [ISO/IEC 15939](#)
- [ISO/IEC 19759](#)
- [ISO/IEC 25000](#)

Measurement Analyst

Individual or organisation that is responsible for the planning, performance, evaluation, and improvement of [measurement](#). [[ISO/IEC 15939](#)]

See also

- [ISO/IEC 15939](#)

Measurement Experience Base

[Data store](#) that contains the evaluation of the [information products](#) and the [measurement process](#) as well as any lessons learned during the [measurement process](#). [[ISO/IEC 15939](#)]

See also

- [ISO/IEC 15939](#)

Measurement Function

Algorithm or calculation performed to combine two or more [base measures](#). [[ISO/IEC 15939](#), [ISO/IEC 25000](#)]

Notes

- [base measures](#)
- [scale](#)
- [derived measure](#)
- [base measures](#)
- [ISO/IEC 15939](#)

See also

Glossary:

- [Measure](#)
- [Measurement](#)

Standards:

- [ISO/IEC 15939](#)

- [ISO/IEC 25000](#)

Measurement Method

Logical sequence of operations, described generically, used in quantifying an **attribute** with respect to a specified **scale**. [[ISO/IEC 99](#), [ISO/IEC 15939](#), [ISO/IEC 25000](#)]

Notes

- **measurement method**
- **attribute**
 - * subjective—quantification involving human judgement,
- [ISO/IEC 15939](#)

See also

Glossary:

- [Attribute](#)

Standards:

- [ISO/IEC 99](#)
- [ISO/IEC 15939](#)
- [ISO/IEC 25000](#)

Measurement Procedure

Set of operations, described specifically, used in the performance of a particular **measurement** according to a given **method**. [[ISO/IEC 99](#), [ISO/IEC 15939](#), [ISO/IEC 25000](#)]

See also

Glossary:

- [Measurement Method](#)

Standards:

- [ISO/IEC 99](#)
- [ISO/IEC 15939](#)
- [ISO/IEC 25000](#)

Measurement Process

The process for establishing, planning, performing and evaluating software **measurement** within an overall project or organisational measurement structure. [[ISO/IEC 15939](#)]

See also

- [ISO/IEC 15939](#)

Measurement Process Owner

Individual or organisation responsible for the [measurement process](#). [[ISO/IEC 15939](#)]

See also

Glossary:

- [Measurement Process](#)

Standards:

- [ISO/IEC 15939](#)

Measurement Sponsor

Individual or organisation that authorises and supports the establishment of the [measurement process](#). [[ISO/IEC 15939](#)]

See also

Glossary:

- [Measurement Process](#)

Standards:

- [ISO/IEC 15939](#)

Measurement User

Individual or organisation that uses the [information products](#). [[ISO/IEC 15939](#)]

See also

Glossary:

- [Information Product](#)

Standards:

- [ISO/IEC 15939](#)

Metric

The defined [measurement method](#) and the measurement [scale](#). [[ISO/IEC 14598](#), [ISO/IEC 9126-1](#)]

Notes

- [internal](#)
- [external](#)
- [direct](#)
- [indirect](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Direct Measure](#)
- [External Measure](#)
- [Indirect Measure](#)
- [Internal Measure](#)
- [Measure](#)
- [Measurement Method](#)
- [Scale](#)

Standards:

- [ISO/IEC 9126-1](#)
- [ISO/IEC 14598](#)

Milestone

A significant point or event in the project. [[IEEE 1490](#)]

Other Definitions

Milestone [[IEEE 1058](#)]: A scheduled event used to measure progress.

Notes

- Major milestones for software projects may include an acquirer or managerial sign-off, baselining of a specification, completion of system integration, and product delivery. Minor milestones might include baselining of a software module or completion of a chapter of the user manual

See also

Glossary:

- [Base Measure](#)
- [Decision Criteria](#)
- [Derived Measure](#)
- [Measurement Function](#)

Standards:

- [ISO/IEC 15939](#)

Mock Object

Temporary dummy objects created to aid [testing](#) until the real objects become available. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Testing](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Model

A semantically closed abstraction of a [system](#) or a complete description of a system from a particular perspective. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Model [[IEEE 1233](#)]: A representation of a real world process, device, or concept.

Model [[ISO/IEC 15474](#)]: A related collection of instances of meta-objects, representing (describing or prescribing) an information system, or parts thereof, such as a software product.

See also

Standards:

- [IEEE 1233](#)
- [ISO/IEC 15474](#)
- [ISO/IEC/IEEE 24765](#)

Modifiability

The ease with which a [system](#) can be changed without introducing [defects](#). [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Flexibility](#)
- [Maintainability](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Modifiable

Structured and has a style such that changes can be made completely, consistently, and correctly while retaining the structure. [[ISO/IEC 12207](#)]

See also

Standards:

- [ISO/IEC 12207](#)

Modularity

The degree to which a **system** or computer program is composed of discrete **components** such that a change to one component has minimal impact on other components. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Modularity [[ISO/IEC/IEEE 24765](#)]: Software attributes that provide a structure of highly independent components.

Modularity [[ISO/IEC/IEEE 24765](#)]: The extent to which a routine or module is like a black box

See also

Glossary:

- [Cohesion](#)
- [Coupling](#)
- [Module](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Module

A program unit that is discrete and identifiable with respect to compiling, combining with other units, and loading. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Module [[ISO/IEC/IEEE 24765](#)]:

1. A logically separable part of a program.
2. A set of source code files under version control that can be manipulated together as one.
3. A collection of both data and the routines that act on it.

Notes

- The terms 'module', 'component,' and 'unit' are often used interchangeably or defined to be sub-elements of one another in different ways depending upon the context. The relationship of these terms is not yet standardized.

See also

Glossary:

- [Component](#)
- [Modularity](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Mock Object

Temporary dummy objects created to aid testing until the real objects become available. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Testing](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Multidimensional Analysis

Multidimensional analysis is a [measurement function](#) that weights different [base measures](#) to give a more relevant insight of the final goal of the measure.

It was primarily developed by Kaner and Bond in [Software Engineering Metrics: What Do They Measure And How Do We Know](#).

See also

[Software Engineering Metrics: What Do They Measure And How Do We Know](#)

Network

An arrangement of nodes and interconnecting branches. [[ISO/IEC 2382-1](#)]

See also

Standards:

- [ISO/IEC 2382](#)

Nonfunctional Requirement

A software **requirement** that describes not what the software will do but how the software will do it. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Functional Requirement](#)
- [Requirement](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Nontechnical Requirement

Requirement affecting **product** and **service** acquisition or development that is not a property of the product or service. [[ISO/IEC/IEEE 24765](#)]

Notes

- [COTS](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Requirement](#)
- [Technical Requirement](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Object

An encapsulation of data and services that manipulate that data. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Object [[ISO/IEC/IEEE 24765](#)]: A specific entity that exists in a program at runtime in object-oriented programming.

Object [[ISO/IEC/IEEE 24765](#)]: Pertaining to the outcome of an assembly or compilation process.

Object [[IEEE 1320](#)]: A member of an object set and an instance of an object type.

See also

Glossary:

- [Object Model](#)

Standards:

- [IEEE 1320](#)
- [ISO/IEC/IEEE 24765](#)

Object Model

An integrated abstraction that treats all activities as performed by collaborating objects and encompassing both the data and the operations that can be performed against that data. [[ISO/IEC 12207](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC/IEEE 24765](#)

Object Oriented Design

A software development technique in which a [system](#) or [component](#) is expressed in terms of [objects](#) and connections between those objects. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Object](#)
- [Object Model](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Observation

Instance of applying a [measurement procedure](#) to produce a [value](#) for a [base measure](#). [[ISO/IEC](#)

15939, ISO/IEC 25000]

See also

Standards:

- [ISO/IEC 15939](#)
- [ISO/IEC 25000](#)

Observation Period

The time interval, where the measurement procedure is observed for collecting (logging) measurement results for rating or validation, consisting of the rating interval and the supplementary run. [[ISO/IEC 14756](#)]

See also

Standards:

- [ISO/IEC 14756](#)

Operability

The capability of the **software product** to enable the user to operate and control it. [[ISO/IEC 9126-1](#)]

Notes

- suitability
- changeability
- adaptability
- installability
- [ISO/IEC 9126-1](#)
- [ISO 9241-10](#)
- [ISO/IEC 9126-1](#)
- functionality
- reliability
- usability
- efficiency
- quality in use
- [ISO/IEC 9126-1](#)

See also

Standards:

- [ISO/IEC 9126-1](#)
- [ISO 9241-10](#)

Operand

A variable, constant, or function upon which an operation is to be performed. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Operational Testing

Testing conducted to evaluate a system or component in its operational environment. [[ISO/IEC 15504](#)]

See also

Glossary:

- [Acceptance Testing](#)
- [Development Testing](#)
- [Qualification Testing](#)
- [Testing](#)

Standards:

- [IEEE 829](#)
- [ISO/IEC 15504](#)

Operator

Individual or organisation that operates the **system**. [[ISO/IEC 12207](#), [ISO/IEC 15939](#), [ISO/IEC 25000](#)]

Other Definitions

Operator [[ISO/IEC/IEEE 24765](#)]: A mathematical or logical symbol that represents an action to be performed in an operation.

Operator [[ISO/IEC 12207](#), [ISO/IEC 15288](#)]: Entity that performs the operation of a **system**.

Operator [[IEEE 1220](#)]: An individual or an organization that contributes to the **functionality** of a system and draws on knowledge, skills, and procedures to contribute the function.

Notes

- [user](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Operand](#)
- [Operator Manual](#)
- [User](#)

Standards:

- [IEEE 1220](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15939](#)
- [ISO/IEC 25000](#)
- [ISO/IEC/IEEE 24765](#)

Operator Manual

A [document](#) that provides the information necessary to initiate and operate a [system](#) or [component](#). [[ISO/IEC/IEEE 24765](#)]

Notes

- [user manual](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Document](#)
- [Installation Manual](#)
- [Maintenance Manual](#)
- [Operator](#)
- [Support Manual](#)
- [User Manual](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Optional Attribute

An [attribute](#) that may have no value for an instance. [[IEEE 1320](#)]

Notes

- [user manual](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Attribute](#)

Standards:

- [IEEE 1320](#)

Optional Requirement

Requirement of a normative document that must be fulfilled in order to comply with a particular option permitted by that document. [[ISO/IEC 14143](#)]

Notes

- [user manual](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Requirement](#)

Standards:

- [ISO/IEC 14143](#)

Organisational Unit

The part of an organisation that is the subject of **measurement**. [[ISO/IEC 15504-9](#), [ISO/IEC 15939](#)]

Notes

- [ISO/IEC 15939](#)

See also

Standards:

- [ISO/IEC 15504](#)
- [ISO/IEC 15939](#)

Path

In software engineering, a sequence of instructions that may be performed in the execution of a computer program. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Path [[ISO/IEC/IEEE 24765](#)]: In file access, a hierarchical sequence of directory and subdirectory names specifying the storage location of a file.

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Path Analysis

Analysis of a computer program to identify all possible paths through the program, to detect incomplete paths, or to discover portions of the program that are not on any path. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Path](#)
- [Path Testing](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Path Testing

Testing designed to execute all or selected **paths** through a computer program. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Branch Testing](#)
- [Path](#)
- [Path Analysis](#)
- [Testing](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Pathological Coupling

A type of **coupling** in which one software module affects or depends upon the internal implementation of another. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Content Coupling](#)
- [Control Coupling](#)
- [Coupling](#)
- [Data Coupling](#)
- [Hybrid Coupling](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Peer Review

A review of a software work product, following defined procedures, by peers of the producers of the product for the purpose of identifying **defects** and improvements. [[CMMi](#)]

Other Definitions

Peer Review [[ISO/IEC/IEEE 24765](#)]: Review of work products performed by peers during development of the work products to identify **defects** for removal.

See also

Glossary:

- [Inspection](#)

Standards:

- [CMMi](#)
- [ISO/IEC/IEEE 24765](#)

Performance

The degree to which a **system** or **component** accomplishes its designated functions within given constraints, such as speed, accuracy, or memory usage. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Level of Performance](#)

- [Performance Indicator](#)
- [Performance Testing](#)
- [Process Performance](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Performance Indicator

An assessment [indicator](#) that supports the judgment of the [process](#) performance of a specific process. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Indicator](#)
- [Performance](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Performance Testing

[Testing](#) conducted to evaluate the compliance of a [system](#) or [component](#) with specified [performance](#) requirements. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Functional Testing](#)
- [Performance](#)
- [Testing](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Pilot Project

A project designed to test a preliminary version of an information processing system under actual but limited operating conditions and which will then be used to test the definitive version of the system. [[ISO/IEC 2382](#)]

See also

Standards:

- [ISO/IEC 2382](#)

Portability

The capability of the software product to be transferred from one environment to another. [[ISO/IEC 9126-1](#)]

Other Definitions

Portability [[ISO/IEC/IEEE 24765](#)]: The ease with which a system or component can be transferred from one hardware or software environment to another.

Portability [[ISO/IEC 2382](#)]: The capability of a program to be executed on various types of data processing systems without converting the program to a different language and with little or no modification.

Notes

- [ISO/IEC 9126-1](#)

See also

- [ISO/IEC 9126-1](#)

Portability Compliance

The capability of the **software product** to adhere to standards or conventions relating to **portability**. [[ISO/IEC 9126-1](#)]

See also

Glossary:

- [Portability](#)

Standards:

- [ISO/IEC 9126-1](#)

Practice

An **activity** that contributes to the purpose or outcomes of a **process** or enhances the capability of a process. [[ISO/IEC 15504](#)]

Other Definitions

Practice [[ISO/IEC/IEEE 24765](#)]: Requirements employed to prescribe a disciplined uniform approach to the software development process.

Practice [[IEEE 1490](#)]: A specific type of professional or management activity that contributes to the execution of a process and that may employ one or more techniques and tools.

See also

Glossary:

- [Key Practices](#)

Standards:

- [IEEE 1490](#)
- [ISO/IEC 15504](#)
- [ISO/IEC/IEEE 24765](#)

Precision

The degree of exactness or discrimination with which a quantity is stated. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Accuracy](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Predictive Metric

A [metric](#) applied during [development](#) and used to predict the [values](#) of a software [quality factor](#). [[IEEE 1061](#)]

See also

Glossary:

- [Metric](#)

Standards:

- [IEEE 1061](#)

Procedure

Ordered series of [steps](#) that specify how to perform a [task](#). [[ISO/IEC 26514](#)]

Other Definitions

Procedure [[ISO/IEC 19770](#)]: Specified way to carry out an activity or **process**.

Procedure [[ISO/IEC/IEEE 24765](#)]: A portion of a computer program that is named and that performs a specific **action**.

Procedure [[ISO/IEC/IEEE 24765](#)]: A **routine** that does not return a value.

See also

Glossary:

- [Action](#)
- [Step](#)
- [Process](#)

Standards:

- [ISO/IEC 19770](#)
- [ISO/IEC 26514](#)
- [ISO/IEC/IEEE 24765](#)

Process

System of activities, which use resources to transform inputs into outputs. [[ISO/IEC" 25000](#)]

Other Definitions

Process [[ISO/IEC 15504-9](#), [ISO/IEC 15939](#)]: Set of interrelated activities that transform inputs into outputs.

Process [[ISO/IEC 2382](#)]: Predetermined course of events defined by its purpose or by its effect, achieved under given conditions.

Process (verb) [[ISO/IEC/IEEE 24765](#)]: To perform operations on data.

Process [[ISO/IEC 15414](#)]: A collection of steps taking place in a prescribed manner and leading to an objective.

Process [[ISO/IEC 2382](#)]: In data processing, the predetermined course of events that occur during the execution of all or part of a program.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC 2382](#)
- [ISO/IEC 15504](#)
- [ISO/IEC 15939](#)
- [ISO/IEC 25000](#)

- [ISO/IEC/IEEE 24765](#)

Process Assessment

A disciplined evaluation of an organizational unit's processes against a [Process Assessment Model](#). [[ISO/IEC 15504](#)]

See also

Glossary:

- [Process](#)
- [Process Assessment Model](#)

Standards:

- [ISO/IEC 15504](#)

Process Assessment Model

A model suitable for the purpose of [assessing process](#) capability, based on one or more [process](#) reference models. [[ISO/IEC 15504](#)]

See also

Glossary:

- [Process](#)
- [Process Assessment](#)

Standards:

- [ISO/IEC 15504](#)

Process Capability

A characterization of the ability of a [process](#) to meet current or projected business goals. [[ISO/IEC 15504](#)]

See also

Glossary:

- [Process](#)
- [Process Capability Determination](#)

Standards:

- [ISO/IEC 15504](#)

Process Capability Determination

A systematic assessment and analysis of selected processes within an organization against a target capability, carried out with the aim of identifying the strengths, weaknesses and risks associated with deploying the processes to meet a particular specified requirement. [[ISO/IEC 15504](#)]

See also

Glossary:

- [Process](#)
- [Process Capability](#)

Standards:

- [ISO/IEC 15504](#)

Process Capability Level

A point on the six-point ordinal scale (of process capability) that represents the capability of the process; each level builds on the capability of the level below. [[ISO/IEC 15504](#)]

See also

Glossary:

- [Process](#)
- [Process Capability](#)

Standards:

- [ISO/IEC 15504](#)

Process Context

The set of factors, documented in the assessment input, that influence the judgment, comprehension and comparability of process attribute ratings. [[ISO/IEC 15504](#)]

See also

Glossary:

- [Process](#)

Standards:

- [ISO/IEC 15504](#)

Process Improvement

Actions taken to change an organization's processes so that they more effectively and/or efficiently meet the organization's business goals. [[ISO/IEC 15504](#)]

See also

Glossary:

- [Process](#)

Standards:

- [ISO/IEC 15504](#)

Process Improvement Objective

Set of target characteristics established to guide the effort to improve an existing process in a specific, measurable way, either in terms of resultant product or service characteristics, such as quality, performance, and conformance to standards, or in the way in which the process is executed, such as elimination of redundant process steps, combination of process steps, and improvement of cycle time. [[ISO/IEC 15504](#)]

See also

Glossary:

- [Process](#)
- [Process Improvement](#)

Standards:

- [ISO/IEC 15504](#)

Process Improvement Program

The strategies, policies, goals, responsibilities and activities concerned with the achievement of specified improvement goals. [[ISO/IEC 15504](#)]

Notes

- [ISO/IEC 15504](#)

See also

Glossary:

- [Process](#)
- [Process Improvement](#)

Standards:

- [ISO/IEC 15504](#)

Process Improvement Project

A subset of the [Process Improvement Program](#) that forms a coherent set of actions to achieve a specific improvement. [[ISO/IEC 15504](#)]

See also

Glossary:

- [Process](#)
- [Process Improvement Program](#)

Standards:

- [ISO/IEC 15504](#)

Process Metric

A [metric](#) used to measure characteristics of the methods, techniques, and tools employed in developing, implementing, and maintaining the software system. [[IEEE 1061](#)]

See also

Glossary:

- [Process](#)
- [Metric](#)

Standards:

- [IEEE 1061](#)

Process Outcome

An observable result of a [process](#). [[ISO/IEC 15504](#)]

Other Definitions

Process Outcome [[ISO/IEC 12207](#), [ISO/IEC 15288](#)]: Observable result of the successful achievement of the process purpose.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Process](#)

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC 15504](#)
- [ISO/IEC/IEEE 24765](#)

Process Performance

The extent to which the execution of a [process](#) achieves its purpose. [[ISO/IEC 15504](#)]

See also

Glossary:

- [Performance](#)
- [Performance Indicator](#)
- [Process](#)

Standards:

- [ISO/IEC 15504](#)

Process Purpose

High-level objective of performing the [process](#) and the likely [outcomes](#) of effective implementation of the [process](#). [[ISO/IEC 15504](#), [ISO/IEC 15288](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Process](#)

Standards:

- [ISO/IEC 15288](#)
- [ISO/IEC 15504](#)
- [ISO/IEC/IEEE 24765](#)

Product

An artifact that is produced, is quantifiable, and can be either an end item in itself or a component item. [[IEEE 1490](#)]

Other Definitions

Product [[ISO/IEC 26514](#)]: Complete set of software and documentation.

Product [[IEEE 1074](#)]: Output of the software development activities (e.g., document, code, or model).

Product [[ISO/IEC 15939](#)]: Result of a process.

Software Product [[ISO/IEC 9126](#), [ISO/IEC 12207](#), [ISO/IEC 15939](#)]: Set of computer programs, procedures, and associated documentation and data.

Notes

- In ISO 9000 there are four agreed generic product categories:
- * hardware (e.g., engine mechanical part);
- * software (e.g., computer program);
- * services (e.g., transport); and
- * processed materials (e.g., lubricant).

:Hardware and processed materials are generally tangible products, while software or services are generally intangible. Most products comprise elements belonging to different generic product categories. Whether the product is then called hardware, processed material, software, or service depends on the dominant element. [[ISO/IEC/IEEE 24765](#)]

- [ISO/IEC 9126](#)

See also

Glossary:

- [Work Product](#)

Standards:

- [IEEE 1074](#)
- [IEEE 1490](#)
- [ISO/IEC 9126](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15939](#)
- [ISO/IEC 15939](#)
- [ISO/IEC 26514](#)

Product Line

Group of products or services sharing a common, managed set of features that satisfy specific needs of a selected market or mission. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Product](#)

- [Software Product](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Product Metric

A [metric](#) used to measure the characteristics of any intermediate or final [product](#) of the software development [process](#). [[IEEE 1061](#)]

See also

Glossary:

- [Product](#)
- [Metric](#)
- [Software Product](#)

Standards:

- [IEEE 1061](#)

Productivity

The capability of the [software product](#) to enable users to expend appropriate amounts of resources in relation to the effectiveness achieved in a specified context of use. [[ISO/IEC 9126-1](#)]

Notes

- [ISO/IEC 9126-1](#)

See also

- [ISO/IEC 9126-1](#)

Programmer Manual

A [document](#) that provides the information necessary to develop or modify software for a given computer system. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Document](#)
- [Installation Manual](#)
- [Maintenance Manual](#)
- [Operator Manual](#)
- [User Manual](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Project

Endeavor with defined start and finish dates undertaken to create a **product** or service in accordance with specified resources and **requirements**. [[ISO/IEC 15288](#), [ISO/IEC 15939](#)]

Other Definitions

Project [[ISO/IEC 2382](#)]: An undertaking with pre-specified objectives, magnitude and duration.

Project [[IEEE 1490](#)]: A temporary endeavor undertaken to create a unique product, service, or result.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [IEEE 1490](#)
- [ISO/IEC 2382](#)
- [ISO/IEC 15288](#)
- [ISO/IEC 15939](#)
- [ISO/IEC/IEEE 24765](#)

Project Management

The application of knowledge, skills, tools, and techniques to project activities to meet the project requirements. [[IEEE 1490](#)]

Other Definitions

Project Management [[ISO/IEC 2382](#)]: The activities concerned with project planning and project control.

See also

Glossary:

- [Project](#)

Standards:

- [IEEE 1490](#)
- [ISO/IEC 2382](#)

Project Phase

A collection of logically related project activities, usually culminating in the completion of a major deliverable. [[IEEE 1490](#)]

Notes

- [IEEE 1490](#)

See also

Glossary:

- [Project](#)

Standards:

- [IEEE 1490](#)

Prototype

Model or preliminary implementation of a piece of software suitable for the evaluation of system design, performance or production potential, or for the better understanding of the software requirements. [[ISO/IEC 15910](#)]

Other Definitions

Prototype [[ISO/IEC/IEEE 24765](#)]: A preliminary type, form, or instance of a system that serves as a model for later stages or for the final, complete version of the system.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Project Phase](#)

Standards:

- [ISO/IEC 15910](#)
- [ISO/IEC/IEEE 24765](#)

Qualification

Process of demonstrating whether an entity is capable of fulfilling specified requirements. [[ISO/IEC 12207](#), [ISO/IEC 15288](#)]

Other Definitions

Qualification [[ISO/IEC/IEEE 24765](#)]: The process of determining whether a system or component is suitable for operational use.

See also

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC/IEEE 24765](#)

Qualification Testing

Testing, conducted by the **developer** and witnessed by the **acquirer** (as appropriate), to demonstrate that a **software product** meets its specifications and is ready for use in its target environment or integration with its containing system. [[ISO/IEC 12207](#)]

Other Definitions

Qualification Testing [[IEEE 829](#)]: **Testing** conducted to determine whether a system or component is suitable for operational use.

See also

Glossary:

- [Acceptance Testing](#)
- [Development Testing](#)
- [Operational Testing](#)
- [Testing](#)

Standards:

- [IEEE 829](#)
- [ISO/IEC 12207](#)

Quality

The totality of characteristics of an entity that bear on its ability to satisfy stated and **implied needs**. [[ISO 8402](#), [ISO/IEC 9126-1](#)]

Other Definitions

Quality [[IEEE 829](#)]: The degree to which a **system, component**, or **process** meets specified requirements.

Quality [[ISO/IEC/IEEE 24765](#)]: Ability of a **product,service, system, component**, or **process** to meet customer or user needs, expectations, or **requirements**.

Quality [[IEEE 1490](#)]: The degree to which a set of inherent characteristics fulfils requirements.

Quality [[IEEE 829](#)]: The degree to which a [system](#), [component](#), or [process](#) meets customer or user needs or expectations.

Notes

- [implied needs](#)
- [ISO 8402](#)
- [ISO/IEC 14598](#)
- [software product](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Quality Assurance](#)
- [Software Quality](#)

Standards:

- [IEEE 829](#)
- [IEEE 1490](#)
- [ISO 8402](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 14598](#)
- [ISO/IEC/IEEE 24765](#)

Quality Assurance

The planned and systematic activities implemented within the quality system, and demonstrated as needed, to provide adequate confidence that an entity will fulfil [requirements](#) for [quality](#). [[ISO/IEC 12207](#)]

Other Definitions

Quality Assurance [[IEEE 610.12](#), [ISO/IEC/IEEE 24765](#)]: A planned and systematic pattern of all actions necessary to provide adequate confidence that an item or [product](#) conforms to established technical [requirements](#).

Quality Assurance [[IEEE 610.12](#), [ISO/IEC/IEEE 24765](#)]: A set of activities designed to evaluate the process by which [products](#) are developed or manufactured.

Quality Assurance [[ISO/IEC 15288](#)]: Part of [quality management](#) focused on providing confidence that quality requirements will be fulfilled.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Quality](#)
- [Quality Control](#)
- [Quality Management](#)

Standards:

- [IEEE 610.12](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC/IEEE 24765](#)

Quality Control

A set of [activities](#) designed to evaluate the [quality](#) of developed or manufactured [products](#). [[IEEE 610.12](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Quality](#)
- [Quality Assurance](#)

Standards:

- [IEEE 610.12](#)
- [ISO/IEC/IEEE 24765](#)

Quality Evaluation

Systematic examination of the extent to which an entity is capable of fulfilling specified requirements. [[ISO 8402](#), [ISO/IEC 9126-1](#), [ISO/IEC 14598](#)]

Notes

- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Quality](#)

Standards:

- [ISO 8402](#)
- [ISO/IEC 9126-1](#)

- [ISO/IEC 14598](#)

Quality Factor

A management-oriented **attribute** of software that contributes to its **quality**. [[IEEE 1061](#)]

See also

Glossary:

- [Direct Metric](#)

Standards:

- [IEEE 1061](#)

Quality Management

Coordinated activities to direct and control an organization with regard to **quality**. [[ISO/IEC 19759](#)]

See also

Glossary:

- [Quality](#)

Standards:

- [ISO/IEC 19759](#)

Quality Measure Element

Base measure or **derived measure** that is used for constructing software **quality measures**. [[ISO/IEC 25000](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Quality](#)

Standards:

- [ISO/IEC 25000](#)
- [ISO/IEC 25021](#)
- [ISO/IEC/IEEE 24765](#)

Quality Metric

a quantitative measure of the degree to which an item possesses a given quality attribute. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Quality Metric [[ISO/IEC/IEEE 24765](#)]: A function whose inputs are software data and whose output is a single numerical value that can be interpreted as the degree to which the software possesses a given quality attribute.

See also

Glossary:

- [Quality](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Quality Model

Defined set of characteristics, and of relationships between them, which provides a framework for specifying quality requirements and evaluating quality. [[ISO/IEC 25000](#)]

Other Definitions

Quality Model [[ISO/IEC 9126-1](#), [ISO/IEC 14598-1](#)]: The set of characteristics and the relationships between them which provide the basis for specifying quality requirements and evaluating quality.

See also

Glossary:

- [Quality](#)

Standards:

- [ISO/IEC 9126](#)
- [ISO/IEC 14598](#)
- [ISO/IEC 25000](#)

Quality in Use

The capability of the **software product** to enable specified users to achieve specified goals with **effectiveness, productivity, safety** and satisfaction in specified contexts of use. [[ISO/IEC 9126-1](#), [ISO/IEC/IEEE 24765](#), [ISO/IEC 25000](#)]

Notes

- [ISO/IEC 9126-1](#)
- [usability](#)
- [ISO 9241-11](#)
- [ISO/IEC 14598](#)
- [usability](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 14598-1](#)
- [safety](#)
- [ISO/IEC 9126-1](#)
- [ISO 9241-11](#)
- [ISO/IEC 9126](#)
- [understandability](#)
- [learnability](#)
- [operability](#)
- [attractiveness](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Internal Quality](#)
- [External Quality](#)

Standards:

- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-4](#)
- [ISO/IEC 25000](#)
- [ISO/IEC/IEEE 24765](#)

Rating

The action of mapping the measured **value** to the appropriate **rating level**. Used to determine the rating level associated with the software for a specific quality characteristic. [[ISO/IEC 9126-1](#), [ISO/IEC 14598-1](#), [ISO/IEC 25000](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Rating Level](#)

Standards:

- [ISO/IEC 9126](#)
- [ISO/IEC 14598](#)
- [ISO/IEC 25000](#)
- [ISO/IEC/IEEE 24765](#)

Rating Level

A scale point on an ordinal [scale](#) which is used to categorise a [measurement](#) scale. [[ISO/IEC 9126-1](#), [ISO/IEC 14598](#), [ISO/IEC 25000](#)]

Notes

- [implied needs](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Rating](#)
- [Scale](#)

Standards:

- [ISO/IEC 9126](#)
- [ISO/IEC 14598](#)
- [ISO/IEC 25000](#)

Readability

The ease with which a system's source code can be read and understood, especially at the detailed, statement level. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Recoverability

The capability of the [software product](#) to re-establish a specified [level of performance](#) and recover the data directly affected in the case of a [failure](#). [[ISO/IEC 9126-1](#)]

Notes

- [ISO/IEC 9126-1](#)
- [Availability](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Availability](#)

Standards:

- [ISO/IEC 9126-1](#)

Recovery

The restoration of a system, program, database, or other system resource to a state in which it can perform required functions. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Reengineering

The examination and alteration of software to reconstitute it in a new form, including the subsequent implementation of the new form. [[ISO/IEC 19759](#)]

See also

Glossary:

- [Process](#)

Standards:

- [ISO/IEC 19759](#)

Regression Testing

Selective retesting of a system or component to verify that modifications have not caused unintended effects and that the system or component still complies with its specified requirements. [[ISO/IEC 90003](#)]

Other Definitions

Regression Testing [[ISO/IEC 90003](#)]: Testing required to determine that a change to a system component has not adversely affected functionality, reliability or performance and has not

introduced additional defects.

See also

Glossary:

- [Testing](#)

Standards:

- [ISO/IEC 90003](#)

Release

Collection of new and/or changed configuration items which are tested and introduced into the live environment together. [[ISO/IEC 20000](#)]

Other Definitions

Release [[ISO/IEC/IEEE 24765](#)]: A software version that is made formally available to a wider community.

Release [[IEEE 829](#), [ISO/IEC 12207](#)]: Particular version of a configuration item that is made available for a specific purpose.

Release [[IEEE 829](#)]: The formal notification and distribution of an approved version.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Process](#)

Standards:

- [IEEE 829](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 20000](#)
- [ISO/IEC/IEEE 24765](#)

Reliability

The capability of the **software product** to maintain a specified **level of performance** in cases of software **faults** or of infringement of its specified interface. [[ISO/IEC 9126-1](#)]

Other Definitions

Reliability [[ISO/IEC/IEEE 24765](#)]: The ability of a **system** or **component** to perform its required functions under stated conditions for a specified period of time.

Software Reliability [[ISO/IEC/IEEE 24765](#)]: The probability [8: The probability is a function of the inputs to and use of the system as well as a function of the existence of faults in the software. The inputs to the system determine whether existing faults, if any, are encountered.] that software will not cause the **failure** of a system for a specified time under specified conditions.

Notes

- [ISO/IEC 9126-1](#)
- [Fault Tolerance](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 2382-14:1997](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-1](#)

See also

Glossary:

- [Fault](#)
- [Fault Tolerance](#)

Standards:

- [ISO/IEC 9126-1](#)

Reliability Compliance

The capability of the software product to adhere to standards, conventions or regulations relating to **reliability**. [[ISO/IEC 9126-1](#)]

See also

Glossary:

- [Reliability](#)

Standards:

- [ISO/IEC 9126-1](#)

Repeatability of Results of Measurements

Closeness of the agreement between the results of successive **measurements** of the same **measurand** carried out under the same conditions of measurement. [[ISO/IEC 14143](#)]

Notes

- [ISO/IEC 99](#)

See also

Glossary:

- [Measurement](#)
- [Reproducibility of Results of Measurements](#)

Standards:

- [ISO/IEC 99](#)
- [ISO/IEC 14143](#)

Replaceability

The capability of the software product to be used in place of another specified software product for the same purpose in the same environment. [[ISO/IEC 9126-1](#)]

Notes

- [ISO/IEC 9126-1](#)
- [interoperability](#)
- [ISO/IEC 9126-1](#)
- [installability](#)
- [adaptability](#)
- [ISO/IEC 9126-1](#)

See also

Standards:

- [ISO/IEC 9126-1](#)

Reproducibility of Results of Measurements

Closeness of the agreement between the results of measurements of the same measurand carried out under changed conditions of measurement. [[ISO/IEC 14143](#)]

Notes

- [ISO/IEC 99](#)

See also

Glossary:

- [Measurement](#)
- [Repeatability of Results of Measurements](#)

Standards:

- [ISO/IEC 99](#)
- [ISO/IEC 14143](#)

Request For Change

Form or screen used to record details of a request for a change to any configuration item within a service or infrastructure. [[ISO/IEC 20000](#)]

See also

Standards:

- [ISO/IEC 20000](#)

Request For Information

A type of procurement document whereby the buyer requests a potential seller to provide various pieces of information related to a product or service or seller capability. [[IEEE 1490](#)]

See also

Standards:

- [IEEE 1490](#)

Request For Proposal

A document used by the [acquirer](#) as a means to announce intention to potential bidders to acquire a specified [system](#), [product](#), or service. [[ISO/IEC 15288](#)]

Other Definitions

Request for Proposal [[IEEE 1362](#)]: A request for services, research, or a product prepared by a customer and delivered to prospective developers with the expectation that prospective developers will respond with their proposed cost, schedule, and development approach.

Request for Proposal [[IEEE 1490](#)]: A type of procurement document used to request proposals from prospective sellers of products or services. In some application areas, it may have a narrower or more specific meaning.

Request for Proposal [[ISO/IEC/IEEE 24765](#)]: A collection of formal documents that includes a description of the desired form of response from a potential supplier, the relevant statement of work for the supplier, and required provisions in the supplier agreement.

See also

Standards:

- [IEEE 1362](#)
- [IEEE 1490](#)
- [ISO/IEC 15288](#)
- [ISO/IEC/IEEE 24765](#)

Requirement

A condition or capability that must be met or possessed by a system, system component, product, or service to satisfy an agreement, standard, specification, or other formally imposed documents. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Requirement [[ISO/IEC/IEEE 24765](#)]: A condition or capability needed by a user to solve a problem or achieve an objective.

Requirement [[IEEE 1490](#)]: A condition or capability that must be met or possessed by a system, product, service, result, or component to satisfy a contract, standard, specification, or other formally imposed document. Requirements include the quantified and documented needs, wants, and expectations of the sponsor, customer, and other stakeholders.

Software Requirement [[ISO/IEC/IEEE 24765](#)]: A software capability needed by a user to solve a problem to achieve an objective.

Software Requirement [[ISO/IEC/IEEE 24765](#)]: A software capability that must be met or possessed by a system or system component to satisfy a contract, standard, specification, or other formally imposed document.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Functional Requirement](#)
- [Nonfunctional Requirement](#)
- [Nontechnical Requirement](#)
- [Optional Requirement](#)
- [Technical Requirement](#)

Standards:

- [IEEE 1490](#)
- [ISO/IEC/IEEE 24765](#)

Requirements Analysis

The process of studying user needs to arrive at a definition of system, hardware, or software requirements. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Requirements Analysis [[ISO/IEC/IEEE 24765](#)]: The process of studying and refining system, hardware, or software requirements.

Requirements Analysis [[ISO/IEC 2382](#)]: A systematic investigation of user requirements to arrive at a definition of a system.

Requirements Analysis [[ISO/IEC/IEEE 24765](#)]: Determination of product- or service-specific performance and functional characteristics based on analyses of customer needs, expectations, and constraints; operational concept; projected utilization environments for people, products, services, and processes; and measures of effectiveness

See also

Glossary:

- [Requirement](#)

Standards:

- [ISO/IEC 2382](#)
- [ISO/IEC/IEEE 24765](#)

Requirements Derivation

The changing or translation of a requirement through analysis into a form that is suitable for low-level analysis or design. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Requirement](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Requirements Document

Document containing any combination of **requirements** or regulations to be met by a **COTS** software **product**. [[ISO/IEC 25051](#)]

Example

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Document](#)
- [Requirement](#)

Standards:

- [ISO/IEC 25051](#)
- [ISO/IEC/IEEE 24765](#)

Requirements Engineering

The science and discipline concerned with analyzing and documenting [requirements](#). [[ISO/IEC/IEEE 24765](#)]

Notes

- [requirements analysis](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Requirement](#)
- [Requirements Analysis](#)
- [Requirements Specification](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Requirements Partitioning

The separation or decomposing of a top-level [requirement](#) or design into successively lower-level detailed requirements or design. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Requirements Review

A process or meeting during which the requirements for a system, hardware item, or software item are presented to project personnel, managers, users, customers, or other interested parties for comment or approval. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Requirement](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Requirements Specification

A document that specifies the [requirements](#) for a system or component. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Requirement](#)
- [Requirements Document](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Requirements Traceability

Discernible association between a [requirement](#) and related requirements, implementations, and verifications. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Requirements Traceability [[ISO/IEC/IEEE 24765](#)]: the identification and documentation of the derivation path (upward) and allocation/ flow-down path

(downward) of requirements in the requirements hierarchy.

See also

Glossary:

- [Requirement](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Requirements Traceability Matrix

A table that links requirements to their origin and traces them throughout the project life cycle. [[IEEE 1490](#)]

See also

Glossary:

- [Requirement](#)
- [Requirements Traceability](#)

Standards:

- [IEEE 1490](#)

Resource

Skilled human resources (specific disciplines either individually or in crews or teams), equipment, services, supplies, commodities, materiel, budgets, or funds. [[IEEE 1490](#)]

Other Definitions

Resource [[ISO/IEC 12207](#), [ISO/IEC 15288](#)]: Asset that is utilized or consumed during the execution of a process.

Resource [[ISO/IEC 15414](#)]: A role (with respect to that action) in which the enterprise object fulfilling the role is essential to the action, requires allocation, or may become unavailable.

Resource [[ISO/IEC 15414](#)]: An enterprise object which is essential to some behavior and which requires allocation or may become unavailable.

Example

- [ISO/IEC/IEEE 24765](#)

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC 15414](#)
- [ISO/IEC/IEEE 24765](#)

Resource Utilisation

The capability of the software product to use appropriate amounts and types of resources when the software performs its function under stated conditions. [[ISO/IEC 9126-1](#)]

Notes

- [ISO/IEC 9126-1](#)

See also

- [ISO/IEC 9126-1](#)

Result

An output from performing project management processes and activities. Results include outcomes (e.g., integrated systems, revised process, restructured organization, tests, trained personnel, etc.) and documents (e.g., policies, plans, studies, procedures, specifications, reports, etc.). [[IEEE 1490](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Deliverable](#)
- [Product](#)

Standards:

- [IEEE 1490](#)
- [ISO/IEC/IEEE 24765](#)

Retirement

Withdrawal of active support by the operation and maintenance organization, partial or total replacement by a new system, or installation of an upgraded system. [[ISO/IEC 12207](#), [ISO/IEC 15288](#)]

Other Definitions

Retirement [[ISO/IEC/IEEE 24765](#)]: Removal of support from an operational system or component.

Retirement [[ISO/IEC/IEEE 24765](#)]: Permanent removal of a system or component from its operational environment.

See also

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC/IEEE 24765](#)

Reverse Engineering

Determining what existing software will do and how it is constructed (to make intelligent changes). [[ISO/IEC/IEEE 24765](#)]

Notes

Reverse Engineering [[ISO/IEC/IEEE 24765](#)]: Software engineering approach that derives a system's design or requirements from its code.

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Risk

An uncertain event or condition that, if it occurs, has a positive or negative effect on a project's objectives. [[IEEE 1490](#)]

Other Definitions

Risk [[IEEE 829](#)]: The combination of the probability of an abnormal event or failure and the consequence(s) of that event or failure to a system's components, operators, users, or environment.

Risk [[ISO/IEC 15026](#)]: A function of the probability of occurrence of a given threat and the potential adverse consequences of that threat's occurrence.

Risk [[IEEE 829](#)]: The combination of the probability of occurrence and the consequences of a given future undesirable event.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Risk Acceptance](#)
- [Risk Analysis](#)

Standards:

- [IEEE 829](#)
- [IEEE 1490](#)
- [ISO/IEC/IEEE 24765](#)

Risk Acceptance

Acknowledgment of a risk factor's existence along with a decision to accept the consequences if the corresponding problem occurs. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Risk Acceptance [[IEEE 1490](#)]: A risk response planning technique that indicates that the project team has decided not to change the project management plan to deal with a risk, or is unable to identify any other suitable response strategy.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Risk](#)

Standards:

- [IEEE 1490](#)
- [ISO/IEC/IEEE 24765](#)

Risk Analysis

The process of examining identified risk factors for probability of occurrence, potential loss, and potential risk-handling strategies. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Risk](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Robustness

The degree to which a system or component can function correctly in the presence of invalid inputs or stressful environmental conditions. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Fault Tolerance](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Role

The participation of an **entity** in a relationship. [[ISO/IEC 15474-1](#)]

Other Definitions

Role [[IEEE 1490](#)]: A defined function to be performed by a project team member, such as **testing**, filing, inspecting, coding.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Actor](#)

Standards:

- [IEEE 1490](#)
- [ISO/IEC 15474](#)
- [ISO/IEC/IEEE 24765](#)

Routine

A subprogram that is called by other programs and subprograms. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Risk [[ISO/IEC/IEEE 24765](#)]: A function or procedure invocable for a single purpose.

Risk [[ISO/IEC 2382](#)]: A program, or part of a program, that may have some general or frequent use.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Function](#)

Standards:

- [ISO/IEC 2382](#)
- [ISO/IEC/IEEE 24765](#)

Run

In software engineering, a single, usually continuous, execution of a computer program. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Safety

The capability of the software product to achieve acceptable levels of risk of harm to people, business, software, property or the environment in a specified context of use. [[ISO/IEC 9126-1](#)]

Other Definitions

Safety [[ISO/IEC/IEEE 24765](#), [ISO/IEC 15026](#)]: The expectation that a system does not, under defined conditions, lead to a state in which human life, health, property, or the environment is endangered.

Notes

- [functionality](#)
- [security](#)
- [reliability](#)
- [usability](#)
- [maintainability](#)
- [ISO/IEC 9126-1](#)

See also

Standards:

- [ISO/IEC 9126-1](#)
- [ISO/IEC/IEEE 24765](#)
- [ISO/IEC 15026](#)

Satisfaction

The capability of the [software product](#) to satisfy users in a specified context of use. [[ISO/IEC 9126-1](#)]

Notes

- [ISO/IEC 9126-1](#)

See also

- [ISO/IEC 9126-1](#)

Scale

Ordered set of **values**, continuous or discrete, or a set of categories to which the **attribute** is mapped. [[ISO/IEC 99](#), [ISO/IEC 15939](#), [ISO/IEC 25000](#)]

Other Definitions

Scale [[ISO/IEC/IEEE 24765](#)]: A set of values with defined properties.

Notes

- The type of scale depends on the nature of the relationship between values on the scale. Four types of scales are commonly defined:

:: Nominal: The measurement values are categorical. For example, the classification of defects by their type does not imply order among the categories.

:: Ordinal: The measurement values are rankings. For example, the assignment of defects to a severity level is a ranking.

:: Interval: The measurement values have equal distances corresponding to equal quantities of the attribute. For example, cyclomatic complexity has the minimum value of one, but each increment represents an additional path. The value of zero is not possible.

:: Ratio: The measurement values have equal distances corresponding to equal quantities of the attribute where the value of zero corresponds to none of the attribute. For example, the size of a software component in terms of LOC is a ratio scale because the value of zero corresponds to no lines of code and each additional increments represents equal amounts of code.

: These are just examples of the types of scales. Roberts [9: F. Roberts. "Measurement Theory with Applications to Decision Making, Utility, and the Social Sciences". Addison-Wesley, 1979] defines more types of scales. [[ISO/IEC 15939](#)]

- [ISO/IEC/IEEE 24765](#)

Example

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC 99](#)
- [ISO/IEC 15939](#)
- [ISO/IEC/IEEE 24765](#)

Security

The capability of the **software product** to protect information and data so that unauthorised persons or systems cannot read or modify them and authorised persons or systems are not denied access to them. [[ISO/IEC 12207](#), [ISO/IEC 9126-1](#)]

Other Definitions

Security [[ISO/IEC 15026](#)]: The protection of system items from accidental or malicious access, use, modification, destruction, or disclosure.

Security [[ISO/IEC 15288](#)]: All aspects related to defining, achieving, and maintaining

confidentiality, integrity, availability, non-repudiation, accountability, authenticity, and reliability of a system.

Notes

- [ISO/IEC 9126-1](#)
- [Safety](#)
- [quality in use](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Safety](#)

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 15026](#)
- [ISO/IEC 15288](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC/IEEE 24765](#)

Service

Performance of activities, work, or duties associated with a **product**. [[ISO/IEC 12207](#), [ISO/IEC 15939](#)]

Other Definitions

Software Service [[ISO/IEC 12207](#), [ISO/IEC 15939](#)]: **Performance** of activities, work, or duties connected with a **software product**, such as its development, **maintenance**, and operation.

See also

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 15939](#)

Service Level Agreement

Written agreement between a service provider and a customer that documents services and agreed service levels. [[ISO/IEC 20000](#)]

See also

Standards:

- [ISO/IEC 20000](#)

Simplicity

The degree to which a [system](#) or [component](#) has a [design](#) and [implementation](#) that is straightforward and easy to understand. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Simplicity [[ISO/IEC/IEEE 24765](#)]: Software [attributes](#) that provide implementation of functions in the most understandable manner.

See also

Glossary:

- [Complexity](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Software

All or part of the programs, procedures, rules, and associated documentation of an information processing system. [[ISO/IEC 2382](#), [ISO/IEC 9126-1](#)]

Other Definitions

Software [[IEEE 829](#)]: Computer programs, procedures, and possibly associated documentation and data pertaining to the operation of a computer system.

Software [[ISO/IEC 26514](#)]: Program or set of programs used to run a computer.

Example

- [ISO/IEC/IEEE 24765](#)

Notes

- [ISO/IEC 9126-1](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Software Product](#)

Standards:

- [IEEE 829](#)
- [ISO/IEC 2382](#)

- [ISO/IEC 9126](#)

Software Asset Management

Effective management, control and protection of software assets within an organization. [[ISO/IEC 19770](#)]

See also

Standards:

- [ISO/IEC 19770](#)

Software Development Process

The process by which user needs are translated into a [software product](#). [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Software Life Cycle](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Software Engineering

The systematic application of scientific and technological knowledge, methods, and experience to the design, implementation, testing, and documentation of software. [[ISO/IEC 2382](#)]

Other Definitions

Software Engineering [[ISO/IEC/IEEE 24765](#)]: the application of a systematic, disciplined, quantifiable approach to the development, operation, and maintenance of software; that is, the application of engineering to software.

See also

Standards:

- [ISO/IEC 2382](#)
- [ISO/IEC/IEEE 24765](#)

Software Item

Identifiable part of a [software product](#). [[ISO/IEC 90003](#)]

Other Definitions

Software Item [[ISO/IEC/IEEE 24765](#)]: An aggregation of software, such as a computer program or database, that satisfies an end use function and is designated for specification, qualification testing, interfacing, configuration management, or other purposes.

Software Item [[ISO/IEC 12207](#)]: Source code, object code, control code, control data, or a collection of these items.

See also

Glossary:

- [Software Configuration Item](#)

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 90003](#)
- [ISO/IEC/IEEE 24765](#)

Software Life Cycle

The period of time that begins when a [software product](#) is conceived and ends when the software is no longer available for use. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Software Life Cycle [[IEEE 1074](#)]: The project-specific sequence of activities that is created by mapping the activities of this standard onto a

selected software life cycle model (SLCM).

Software Life Cycle [[IEEE 1362](#)]: The system or product cycle initiated by a user need or a perceived customer need and terminated by discontinued use of the product.

See also

Glossary:

- [Software Development Process](#)

Standards:

- [IEEE 1074](#)
- [IEEE 1362](#)
- [ISO/IEC/IEEE 24765](#)

Software Product Evaluation

Technical operation that consists of producing an assessment of one or more characteristics of a **software product** according to a specified procedure. [[ISO/IEC 25000](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC 25000](#)
- [ISO/IEC/IEEE 24765](#)

Software Quality

Capability of a **software product** to satisfy stated and **implied needs** when used under specified conditions. [[ISO/IEC 25000](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Software Quality Characteristic](#)
- [Software Quality Evaluation](#)

Standards:

- [ISO/IEC 25000](#)
- [ISO/IEC/IEEE 24765](#)

Software Quality Characteristic

Category of software quality attributes that bears on **software quality**. [[ISO/IEC 25000](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Software Quality](#)

Standards:

- [ISO/IEC 25000](#)
- [ISO/IEC/IEEE 24765](#)

Software Quality Evaluation

Systematic examination of the extent to which a [software product](#) is capable of satisfying stated and [implied needs](#). [[ISO/IEC 25000](#)]

See also

Glossary:

- [Software Product Evaluation](#)
- [Software Quality](#)

Standards:

- [ISO/IEC 25000](#)

Software Quality Measure

Measure of [internal software quality](#), [external software quality](#) or [software quality in use](#). [IEEE 1490](#)]

Notes

- [ISO/IEC 25010](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [External Quality](#)
- [Internal Quality](#)
- [Measure](#)
- [Quality in Use](#)

Standards:

- [ISO/IEC 25000](#)
- [ISO/IEC/IEEE 24765](#)

Software Repository

A software library providing permanent, archival storage for software and related documentation. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Software Unit

Separately compilable piece of code. [[ISO/IEC 12207](#)]

Other Definitions

Software Unit [[ISO/IEC 12207](#)]: The lowest element in one or more software components.

See also

Standards:

- [ISO/IEC 12207](#)

Source Code

Computer instructions and data definitions expressed in a form suitable for input to an assembler, compiler, or other translator. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Product](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Specification

A document that specifies, in a complete, precise, verifiable manner, the [requirements](#), design, behavior, or other characteristics of a [system](#), [component](#), [product](#), result, or service and, often, the procedures for determining whether these provisions have been satisfied. [[IEEE 1490](#)]

Other Definitions

Specification [[ISO/IEC 2382](#)]: A detailed formulation, in document form, which provides a definitive description of a [system](#) for the purpose of developing or validating the system.

Specification [[IEEE 1220](#)]: A document that fully describes a design element or its interfaces in terms of [requirements](#) (functional, performance, constraints, and design characteristics) and the qualification conditions and procedures for each requirement.

See also

Glossary:

- [Requirement](#)

Standards:

- [IEEE 1220](#)
- [IEEE 1490](#)
- [ISO/IEC 2382](#)

Stability

The capability of the software product to avoid unexpected effects from modifications of the software. [[ISO/IEC 9126-1](#)]

See also

- [ISO/IEC 9126-1](#)

Stage

Period within the life cycle of an entity that relates to the state of its description or realization. [[ISO/IEC 12207](#), [ISO/IEC 15288](#)]

Notes

- Stages relate to major progress and achievement milestones of the system through its life cycle. Stages may

be overlapping. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)

Stakeholder

Individual or organisation that sponsors [measurement](#), provides [data](#), is a user of the measurement results or otherwise participates in the [measurement process](#). [[ISO/IEC 15939](#)]

Other Definitions

Stakeholder [[ISO/IEC 12207](#), [ISO/IEC 15288](#), [ISO/IEC 15939](#)]: Individual or organization having a right, share, claim, or interest in a system or in its possession of characteristics that meet their needs and expectations.

Stakeholder [[IEEE 1490](#)]: Person or organization (e.g. customer, sponsor, performing organization, or the public) that is actively involved in the project, or whose

interests may be positively or negatively affected by execution or completion of the project. A stakeholder may also exert influence over the project and its deliverables.

Examples

- [ISO/IEC/IEEE 24765](#)

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [IEEE 1490](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC 15939](#)

Standard

Set of mandatory requirements established by consensus and maintained by a recognized body to prescribe a disciplined uniform approach or specify a **product**, that is, mandatory conventions and practices. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Standard [[IEEE 1490](#)]: A document that provides, for common and repeated use, rules, guidelines or characteristics for activities or their results, aimed at the achievement of the optimum degree of order in a given context.

See also

Standards:

- [IEEE 1490](#)
- [ISO/IEC/IEEE 24765](#)

Standard Process

The set of definitions of the basic **processes** that guide all processes in an organization. [[ISO/IEC 15504](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Process](#)

Standards:

- [ISO/IEC 15504](#)
- [ISO/IEC/IEEE 24765](#)

Statement

In a programming language, a meaningful expression that defines data, specifies program actions, or directs the assembler or compiler. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Statement Testing](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Statement Testing

[Testing](#) designed to execute each statement of a computer program. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Branch Testing](#)
- [Path Testing](#)
- [Statement](#)
- [Testing](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Statement of Work

Document used by the [acquirer](#) to describe and specify the tasks to be performed under the [contract](#). [[ISO/IEC 12207](#)]

Other Definitions

Statement of Work [[IEEE 1490](#)]: A narrative description of products, services, or results to be

supplied.

See also

Standards:

- [IEEE 1490](#)
- [ISO/IEC 12207](#)

Static Analysis

The process of evaluating a **system** or **component** based on its form, structure, content, or documentation. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Dynamic Analysis](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Statistical Process Control

Statistically based analysis of a **process** and measures of **process performance**, which identify common and special causes of variation in process performance and maintain process performance within limits. [[ISO/IEC/IEEE 24765](#)]

Notes

Statistical Process Control is an effective method of monitoring a process through the use of control charts. In general, if a process exceeds the limits, we assume that it's out of control and the project team should search for special causes to deal with it. There are many kinds of charts, such as the \bar{x} chart and r-chart, etc.

The c-chart

The c-chart plots the number of **defects** in a **process**. If C_i denotes the number of defects obtained in the i th observation, the c-chart plots the data points at the height $C_1, C_2 \dots C_n$. The c-chart also has a center line (CL) at height \bar{C} (the average of C_i and the following 3σ lines:

$$\text{Upper Control Limit: } UCL = \bar{C} + 3\sqrt{\bar{C}}$$

$$\text{Lower Control Limit: } LCL = \bar{C} - 3\sqrt{\bar{C}}$$

If LCL is negative, it is set to zero. The c-chart assumes the Poisson distribution of defects and is thus approximative.

Use of SPC in software engineering is still under debate. One major issue is that formal SPC requires data to be independent variables from homogeneous sources of variation. As exposed in [Software Engineering Metrics: What Do They Measure And How Do We Know](#), software

engineering data is often affected by many variations sources. Furthermore, software engineering is domain-specific (requirements may vary from one domain to another) and limits may vary.

See also

Glossary:

- [Process](#)
- [Process Performance](#)

Papers:

[Monitoring Software Quality Evolution for Defects](#)

[Software Engineering Metrics: What Do They Measure And How Do We Know](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Step

One element (numbered list item) in a [procedure](#) that tells a [user](#) to perform an [action](#) (or actions). [[ISO/IEC 26514](#)]

Other Definitions

Step [[ISO/IEC 15414](#)]: An abstraction of an [action](#), used in a [process](#), that may leave unspecified objects that participate in that action.

Notes

- [actions](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Action](#)
- [Procedure](#)
- [Process](#)

Standards:

- [ISO/IEC 15414](#)
- [ISO/IEC 26514](#)
- [ISO/IEC/IEEE 24765](#)

Stress Testing

[Testing](#) conducted to evaluate a [system](#) or [component](#) at or beyond the limits of its specified

requirements. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Testing](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Structural Testing

Testing that takes into account the internal mechanism of a system or component. Syn: glass-box testing, white-box testing. [[ISO/IEC/IEEE 24765](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Functional Testing](#)
- [Testing](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Stub

A skeletal or special-purpose implementation of a software **module**, used to develop or **test** a module that calls or is otherwise dependent on it. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Stub [[ISO/IEC/IEEE 24765](#)]: A computer program statement substituting for the body of a software module that is or will be defined elsewhere.

Stub [[ISO/IEC/IEEE 24765](#)]: Scaffolding code written for the purpose of exercising higher-level code before the lower-level routines that will ultimately be used are available.

See also

Glossary:

- [Mock Object](#)
- [Testing](#)

Standards:

- [IEEE 1362](#)
- [ISO/IEC 9126](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15939](#)

Suitability

The capability of the software product to provide an appropriate set of functions for specified tasks and user objectives. [[ISO/IEC 9126-1](#)]

Notes

- [ISO/IEC 9126-1](#)
- [ISO 9241-10](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-1](#)

See also

Standards:

- [ISO/IEC 9126-1](#)
- [ISO 9241-10](#)

Supplier

Organisation that enters into an agreement with the [acquirer](#) for the supply of a [system](#), [software product](#) or [software service](#) under the terms of that agreement. [[ISO/IEC 9126](#), [ISO/IEC 12207](#), [ISO/IEC 15939](#)]

Notes

- [ISO/IEC 15939](#)
- [acquirer](#)
- [ISO/IEC 15939](#)

See also

Glossary:

- [Acquirer](#)

Standards:

- [ISO/IEC 9126](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15939](#)

Support

The set of activities necessary to ensure that an operational system or component fulfills its original **requirements** and any subsequent modifications to those requirements. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Software Support [[ISO 9127](#)]: The act of maintaining the software and its associated documentation in a functional state.

Examples

- [ISO/IEC/IEEE 24765](#)

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO 9127](#)
- [ISO/IEC/IEEE 24765](#)

Support Manual

A **document** that provides the information necessary to service and maintain an operational **system** or **component** throughout its life cycle. [[ISO/IEC/IEEE 24765](#)]

Notes

- [Maintenance Manual](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Document](#)
- [Installation Manual](#)
- [Maintenance Manual](#)
- [Operator Manual](#)
- [User Manual](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

System

Integrated composite that consists of one or more of the **processes**, hardware, software, facilities and people, that provides a capability to satisfy a stated need or objective. [[ISO/IEC 9126](#), [ISO/IEC 12207](#), [ISO/IEC 15939](#)]

Other Definitions

Software System [[IEEE 1362](#)]: A software-intensive system for which software is the only component to be developed or modified.

See also

Standards:

- [IEEE 1362](#)
- [ISO/IEC 9126](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15939](#)

System Testing

Testing conducted on a complete, integrated system to evaluate the system's compliance with its specified requirements. [[IEEE 829](#)]

See also

Glossary:

- [Integration Test](#)
- [Testing](#)
- [Unit Test](#)

Standards:

- [IEEE 829](#)

Task

The **activities** required to achieve a goal. [[ISO/IEC 9126](#)]

Other Definitions

Task [[ISO/IEC 12207](#), [ISO/IEC 15288](#)]: Required, recommended, or permissible **action**, intended to contribute to the achievement of one or more outcomes of a **process**.

Task [[ISO/IEC/IEEE 24765](#)]: In software design, a [\[\[Software Component|software component](#) that can operate in parallel with other software components.

Task [[ISO/IEC/IEEE 24765](#)]: A concurrent object with its own thread of control.

Task [[ISO/IEC/IEEE 24765](#)]: A sequence of instructions treated as a basic unit of work by the supervisory program of an operating system.

Task [[IEEE 829](#)]: Smallest unit of work subject to management accountability; a well-defined work assignment for one or more project members.

Notes

- [activities](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Activity](#)
- [Procedure](#)
- [Process](#)

Standards:

- [IEEE 829](#)
- [ISO/IEC 9126](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC/IEEE 24765](#)

Technical Requirement

Requirements relating to the technology and environment, for the **development, maintenance, support** and execution of the software. [[ISO/IEC/IEEE 24765](#)]

Examples

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Nontechnical Requirement](#)
- [Requirement](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Technique

Methods and skills required to carry out a specific **activity**. [[ISO/IEC 25001](#), [ISO/IEC 12207](#), [ISO/IEC 15939](#)]

Other Definitions

Technique [[ISO/IEC/IEEE 24765](#)]: Technical or managerial **procedure** that aids in the evaluation and improvement of the **software development process**.

Technique [[IEEE 1490](#)]: A defined systematic **procedure** employed by a human resource to perform an **activity** to produce a **product** or result or deliver a **service**, and that may employ one or more tools.

See also

Standards:

- [IEEE 1490](#)
- [ISO/IEC 25001](#)
- [ISO/IEC/IEEE 24765](#)

Test

An **activity** in which a **system** or **component** is executed under specified conditions, the results are observed or recorded, and an evaluation is made of some aspect of the system or component. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Test [[IEEE 829](#)]: A set of one or more **test cases** and procedures.

See also

Glossary:

- [Test Case](#)
- [Testing](#)

Standards:

- [IEEE 1362](#)
- [ISO/IEC 9126](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15939](#)

Test Case

A set of inputs, execution preconditions, and expected outcomes developed for a particular objective to exercise a particular program path or to verify compliance with a specific **requirement**. [[IEEE 1012](#), [SIGIST](#)]

Other Definitions

Test Case [[IEEE 610.12](#)]: A documented instruction for the tester that specifies how a function or a combination of functions shall or should be tested. A test case includes detailed information on the following issues:

- the test objective;
- the functions to be tested;
- the testing environment and other conditions;
- the test data;
- the procedure;
- the expected behaviour of the system.

See also

Glossary:

- [Requirement](#)
- [Test Case Suite](#)
- [Testing](#)

Standards:

- [IEEE 1012](#)
- [IEEE 610.12](#)
- [SIGIST](#)

Test Case Suite

A collection of one or more [test cases](#) for the software under test. [[SIGIST](#)]

See also

- [SIGIST](#)

Test Coverage

Extent to which the [test cases](#) test the [requirements](#) for the [system](#) or [software product](#). [[ISO/IEC 12207](#)]

Other Definitions

Test Coverage [[ISO/IEC/IEEE 24765](#)]: The degree to which a given [test](#) or set of tests addresses all specified [requirements](#) for a given [system](#) or [component](#).

See also

Glossary:

- [Branch Coverage](#)
- [Code Coverage](#)
- [Requirement](#)
- [Test](#)
- [Testing](#)

- [Test Case](#)

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC/IEEE 24765](#)

Test Documentation

Collection of the [documentation](#) inherent to the [testing](#) activities. [[ISO/IEC 25051](#)]

Other Definitions

Test Documentation [[ISO/IEC/IEEE 24765](#)]: [Documentation](#) describing plans for, or results of, the [testing](#) of a [system](#) or [component](#).

See also

Glossary:

- [Documentation](#)
- [Testing](#)

Standards:

- [ISO/IEC 25051](#)
- [ISO/IEC/IEEE 24765](#)

Test Environment

Hardware and software configuration necessary to conduct the [test case](#). [[ISO/IEC 25051](#)]

See also

Glossary:

- [Test Case](#)
- [Testing](#)

Standards:

- [ISO/IEC 25051](#)

Test Objective

Identified set of software features to be measured under specified conditions by comparing actual behavior with the required behavior. [[ISO/IEC 25051](#), [ISO/IEC 25062](#)]

See also

Glossary:

- [Testing](#)

Standards:

- [ISO/IEC 25051](#)
- [ISO/IEC 25062](#)

Test Plan

A **document** describing the scope, approach, resources, and schedule of intended **test** activities. [[IEEE 1012](#), [ISO/IEC 12207](#), [ISO/IEC 15939](#)]

Other Definitions

Test Plan [[IEEE 1012](#)]: A document that describes the technical and management approach to be followed for testing a system or component.

Test Plan [[ISO/IEC 2382](#)]: A plan that establishes detailed requirements, criteria, general methodology, responsibilities, and general planning for test and evaluation of a system.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Testing](#)

Standards:

- [IEEE 1012](#)
- [ISO/IEC 2382](#)

Test Procedure

Detailed instructions for the setup, execution, and evaluation of results for a given **test case**. [[IEEE 1012](#)]

Other Definitions

Test Procedure [[IEEE 1012](#)]: **Documentation** that specifies a sequence of actions for the execution of a **test**.

See also

Glossary:

- [Testing](#)

Standards:

- [IEEE 1012](#)

Testability

The capability of the **software product** to enable modified software to be validated. [[ISO/IEC 9126-1](#)]

Other Definitions

Testability [[ISO/IEC 12207](#)]: Extent to which an objective and feasible **test** can be designed to determine whether a requirement is met.

Testability [[IEEE 1233](#)]: The degree to which a **requirement** is stated in terms that permit establishment of test criteria and performance of tests to determine whether those criteria have been met.

Testability [[ISO/IEC/IEEE 24765](#)]:

1. The degree to which a system can be unit tested and system tested.
2. The effort required to test software.
3. The degree to which a system or component facilitates the establishment of test criteria and the performance of tests to determine whether those criteria have been met.

See also

Glossary:

- [Branch Coverage](#)
- [Code Coverage](#)
- [Test Coverage](#)
- [Testing](#)

Standards:

- [IEEE 1233](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 12207](#)
- [ISO/IEC/IEEE 24765](#)

Testing

Activity in which a **system** or **component** is executed under specified conditions, the results are observed or recorded, and an evaluation is made of some aspect of the system or component. [[IEEE 829](#)]

Other Definitions

Software Testing [[ISO/IEC 19759](#)]: The dynamic verification of the behavior of a program on a finite set of **test cases**, suitably selected from the usually infinite executions domain, against the expected behavior.

See also

Glossary:

- [Acceptance Testing](#)
- [Branch Testing](#)
- [Development Testing](#)
- [Interface Testing](#)
- [Interoperability Testing](#)
- [Functional Testing](#)
- [Operational Testing](#)
- [Path Testing](#)
- [Performance Testing](#)
- [Regression Testing](#)
- [Qualification Testing](#)
- [Statement Testing](#)
- [Stress Testing](#)
- [Structural Testing](#)
- [System Testing](#)
- [Testing Description](#)

Standards:

- [IEEE 829](#)
- [ISO/IEC 19759](#)

Testing Description

Description of the test execution conditions (i.e. test procedure). [[ISO/IEC 25051](#), [ISO/IEC 25062](#)]

See also

Glossary:

- [Testing](#)

Standards:

- [ISO/IEC 25051](#)
- [ISO/IEC 25062](#)

Time Behaviour

The capability of the software product to provide appropriate response and processing times and throughput rates when performing its function, under stated conditions. [[ISO/IEC 9126-1](#)]

See also

- [ISO/IEC 9126-1](#)

Tool

A **software product** that provides support for software and system life cycle processes. [[ISO/IEC 15474](#)]

Other Definitions

Tool [[IEEE 1490](#)]: Something tangible, such as a template or software program, used in performing an activity to produce a product or result.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [IEEE 1490](#)
- [ISO/IEC 15474](#)
- [ISO/IEC/IEEE 24765](#)

Total Quality Management

A holistic approach to **quality** improvement in all life-cycle phases. [[ISO/IEC/IEEE 24765](#)]

See also

Standards:

- [ISO/IEC/IEEE 24765](#)

Traceability

The degree to which a relationship can be established between two or more products of the development process, especially products having a predecessor-successor or master-subordinate relationship to one another. [[IEEE 1233](#)]

Other Definitions

Traceability [[IEEE 1362](#)]: The identification and documentation of derivation paths (upward) and allocation or flowdown paths (downward) of work products in the work product hierarchy.

Traceability [[ISO/IEC/IEEE 24765](#)]: The degree to which each element in a software development product establishes its reason for existing.

Traceability [[ISO/IEC/IEEE 24765](#)]: Discernible association among two or more logical entities, such as requirements, system elements, verifications, or tasks.

Notes

- [requirements](#)
- [design](#)
- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [IEEE 1233](#)
- [IEEE 1362](#)
- [ISO/IEC/IEEE 24765](#)

Traceable

Having [components](#) whose origin can be determined. [[ISO/IEC 12207](#)]

See also

Glossary:

- [Traceability](#)

Standards:

- [ISO/IEC 12207](#)

Trunk

The software's main line of development; the main starting point of most branches. [[ISO/IEC/IEEE 24765](#)]

See also

Glossary:

- [Branch](#)
- [Configuration Management](#)

Standards:

- [ISO/IEC/IEEE 24765](#)

Understandability

The capability of the [software product](#) to enable the user to understand whether the software is suitable, and how it can be used for particular tasks and conditions of use. [[ISO/IEC 9126-1](#)]

Other Definitions

Understandability [[ISO/IEC/IEEE 24765](#)]: The ease with which a system can be comprehended at both the system-organizational and detailed-statement levels.

Notes

- [ISO/IEC 9126-1](#)
- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC 9126-1](#)
- [ISO/IEC/IEEE 24765](#)

Unit Test

Testing of individual [routines](#) and modules by the [developer](#) or an independent tester. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

Unit Test [[ISO/IEC 2382](#)]: A [test](#) of individual programs or modules in order to ensure that there are no analysis or programming errors.

Unit Test [[ISO/IEC/IEEE 24765](#)]: A [test](#) of individual hardware or software units or groups of related units.

See also

Glossary:

- [Test](#)
- [Testing](#)

Standards:

- [ISO/IEC 2382](#)
- [ISO/IEC/IEEE 24765](#)

Unit of Measurement

Particular quantity, defined and adopted by convention, with which other quantities of the same kind are compared in order to express their magnitude relative to that quantity. [[ISO/IEC 99](#), [ISO/IEC 15939](#), [ISO/IEC 25000](#)]

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Measurement](#)

Standards:

- [ISO/IEC 99](#)
- [ISO/IEC 15939](#)
- [ISO/IEC 25000](#)
- [ISO/IEC/IEEE 24765](#)

Usability

The capability of the [software product](#) to be understood, learned, used and attractive to the user, when used under specified conditions. [[ISO/IEC 9126-1](#)]

Other Definitions

Usability [[ISO/IEC/IEEE 24765](#)]: The ease with which a user can learn to operate, prepare inputs for, and interpret outputs of a system or component.

Usability [[ISO/IEC 25062](#)]: The extent to which a product can be used by specified users to achieve specified goals with effectiveness, efficiency and satisfaction in a specified context of use.

Notes

- [functionality](#)
- [reliability](#)
- [efficiency](#)
- [ISO/IEC 9126](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Understandability](#)

Standards:

- [ISO/IEC 9126](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 25062](#)
- [ISO/IEC/IEEE 24765](#)

Usability Compliance

The capability of the software product to adhere to standards, conventions, style guides or regulations relating to usability. [[ISO/IEC 9126-1](#)]

See also

- [ISO/IEC 9126-1](#)

User

Individual or organisation that uses the **system** to perform a specific function. [[ISO/IEC 12207](#), [ISO/IEC 15939](#)]

Other Definitions

User [[ISO/IEC 9126](#)]: An individual that uses the **software product** to perform a specific function.

User [[ISO/IEC 26514](#)]: Person who performs one or more **tasks** with software; a member of a specific audience.

User [[ISO/IEC 25062](#)]: Person who interacts with the **product**.

User [[IEEE 1362](#)]: Individual or organization who uses a software-intensive system in daily work activities or recreational pursuits.

User [[ISO/IEC 15288](#), [ISO/IEC 15939](#)]: Individual or group that benefits from a **system** during its utilization.

User [[ISO/IEC 14143](#), [ISO/IEC 29881](#)]: Any person or thing that communicates or interacts with the software at any time.

Notes

- operators
- developers
- maintainers
- [ISO/IEC 9126-1](#)
- acquirer
- maintainer
- operator
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Developer](#)

Standards:

- [IEEE 1362](#)
- [ISO/IEC 9126](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 14143](#)

- [ISO/IEC 15288](#)
- [ISO/IEC 15939](#)
- [ISO/IEC 25062](#)
- [ISO/IEC 26514](#)
- [ISO/IEC 29881](#)
- [ISO/IEC/IEEE 24765](#)

User Documentation

Documentation for **users** of a system, including a system description and procedures for using the system to obtain desired results. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

User Documentation [[ISO/IEC 26514](#)]: Information to describe, explain, or instruct how to use software.

See also

Glossary:

- [Documentation](#)
- [User](#)

Standards:

- [ISO/IEC 26514](#)
- [ISO/IEC/IEEE 24765](#)

User Manual

A **document** that presents the information necessary to employ a **system** or **component** to obtain desired results. [[ISO/IEC/IEEE 24765](#)]

Other Definitions

User Manual [[ISO/IEC 2382](#)]: A **document** that describes how to use a functional unit, and that may include description of the rights and responsibilities of the **user**, the owner, and the **supplier** of the unit.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Document](#)
- [Installation Manual](#)
- [Maintenance Manual](#)

- [Operator Manual](#)
- [Support Manual](#)
- [User Documentation](#)

Standards:

- [ISO/IEC 2382](#)
- [ISO/IEC/IEEE 24765](#)

Validation

Determination of the correctness of the products of software development with respect to the user needs and requirements. [[SIGIST](#)]

Other Definitions

Validation [[ISO 8402](#), [ISO/IEC 9126-1](#)]: Confirmation by examination and provision of objective evidence that the particular requirements for a specific intended use are fulfilled.

Validation [[ISO/IEC 15288](#)]: Confirmation, through the provision of objective evidence, that the requirements for a specific intended use or application have been fulfilled.

Validation [[IEEE 1012](#)]: The process of providing evidence that the software and its associated products satisfy system requirements allocated to software at the end of each life cycle activity, solve the right problem, and satisfy intended use and user needs.

Validation [[ISO/IEC 12207](#)]: In a life cycle context, the set of activities ensuring and gaining confidence that a system is able to accomplish its intended use, goals and objectives.

Validation [[IEEE 1233](#)]: The process of evaluating a system or component during or at the end of the development process to determine whether a system or component satisfies specified requirements.

Validation [[IEEE 1490](#)]: The assurance that a product, service, or system meets the needs of the customer and other identified stakeholders. It often involves acceptance and suitability with external customers.

Notes

- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC/IEEE 24765](#)

See also

Glossary:

- [Verification](#)

Standards:

- [IEEE 1012](#)
- [IEEE 1233](#)

- [IEEE 1490](#)
- [ISO 8402](#)
- [ISO/IEC 9126](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC/IEEE 24765](#)
- [SIGIST](#)

Value

Number or category assigned to an **attribute** of an entity by making a **measurement**. [[ISO/IEC 25000](#)]

Other Definitions

Value [[ISO/IEC 15939](#)]: Numerical or categorical result assigned to a **base measure**, **derived measure**, or **indicator**. [[ISO/IEC 15939](#)]

See also

Glossary:

- [Base Measure](#)
- [Derived Measure](#)
- [Indicator](#)
- [Measurement](#)

Standards:

- [ISO/IEC 15939](#)
- [ISO/IEC 25000](#)

Verification

Confirmation, through the provision of objective evidence, that specified **requirements** have been fulfilled. [[ISO/IEC 12207](#), [ISO/IEC 15288](#), [ISO/IEC 25000](#)]

Other Definitions

Verification [[IEEE 1012](#), [SIGIST](#)]: The process of evaluating a **system** or **component** to determine whether the **products** of a given development **phase** satisfy the conditions imposed at the start of that phase.

Verification [[ISO 8402](#), [ISO/IEC 9126](#)]: Confirmation by examination and provision of objective evidence that specified **requirements** have been fulfilled.

Verification [[ISO/IEC/IEEE 24765](#)]: Formal proof of program correctness.

Verification [[IEEE 1490](#)]: The evaluation of whether or not a **product**, **service**, or **system** complies with a regulation, **requirement**, specification, or imposed condition. It is often an internal process.

Verification [[IEEE 829](#)]: Process of providing objective evidence that the software and its associated products comply with requirements (e.g., for correctness, completeness, consistency, and accuracy) for all life cycle activities during each life cycle process (acquisition, supply, development, operation, and maintenance), satisfy standards, practices, and conventions during life cycle processes, and successfully complete each life cycle activity and satisfy all the criteria for initiating succeeding life cycle activities (e.g., building the software correctly).

Notes

- [ISO/IEC 9126](#)

See also

Glossary:

- [Validation](#)

Standards:

- [IEEE 829](#)
- [IEEE 1012](#)
- [IEEE 1490](#)
- [ISO 8402](#)
- [ISO/IEC 9126](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC 25000](#)
- [ISO/IEC/IEEE 24765](#)
- [SIGIST](#)

Version

Identified instance of an item. [[ISO/IEC 12207](#)]

Other Definitions

Version [[ISO/IEC/IEEE 24765](#)]: An initial release or re- release of a computer **software configuration item**, associated with a complete compilation or recompilation of the computer software configuration item.

Version [[ISO/IEC/IEEE 24765](#)]: An initial release or complete re- release of a **document**, as opposed to a revision resulting from issuing change pages to a previous release.

Version [[ISO/IEC/IEEE 24765](#)]: An operational **software product** that differs from similar products in terms of capability, environmental requirements, and configuration.

Version [[ISO/IEC/IEEE 24765](#)]: An identifiable instance of a specific file or release of a complete system.

Notes

- [ISO/IEC/IEEE 24765](#)

See also

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC/IEEE 24765](#)

Work Breakdown Structure

A deliverable-oriented hierarchical decomposition of the work to be executed by the project team to accomplish the project objectives and create the required deliverables. It organizes and defines the total scope of the project. [[IEEE 1490](#)]

See also

Standards:

- [IEEE 1490](#)

Work Product

An artifact associated with the execution of a [process](#). [[ISO/IEC 15504](#)]

Other Definitions

Work Product [[IEEE 1058](#)]: A tangible item produced during the process of developing or modifying software.

See also

Glossary:

- [Product](#)

Standards:

- [IEEE 1058](#)


Chapter 7. Standards

CMMi

CMMi stands for **Capability Maturity Model Integration**.

CMMi is a process developed by the Carnegie Mellon Software Engineering Institute.

Structure

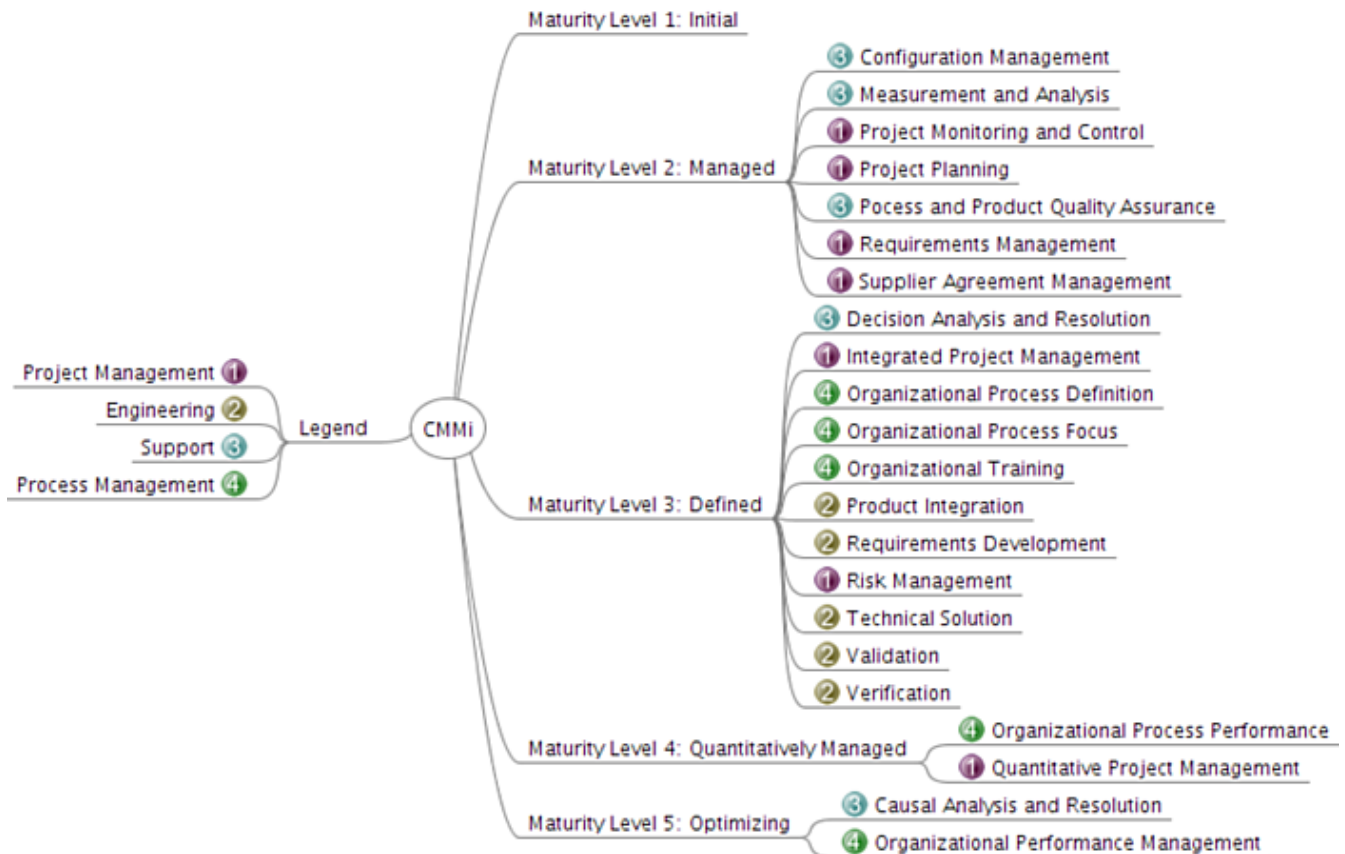

See also

Standards:

- [Team Software Process](#)

External Links:

- www.sei.cmu.edu/cmmi/

DOD-STD-2167A

Military Standard - Defense System Software Development

DOD-STD-2167A.

See also

- <http://en.wikipedia.org/wiki/DOD-STD-2167A>

IEC 61508

International Standard IEC 61508

Functional safety of electrical / electronic / programmable electronic safety related systems

Year: 1998, 2000, 2002, 2010

Contents

Part 1: General requirements

Part 2: Requirements for electrical/electronic/programmable electronic safety-related systems

Part 3: Software Requirements

Part 4: Definitions and abbreviations

Part 5: Examples of methods for the determination of safety integrity levels

Part 6: Guidelines on the application of IEC 61508-2 and IEC 61508-3

Part 7: Overview on techniques and measures

See also

- [IEC 61508-3](#)
- [IEC 61508-7](#)

IEC 61508-3

International Standard IEC 61508-3

Functional safety of electrical / electronic / programmable electronic safety related systems

Part 3: Software requirements

Year: 1998

See also

- [IEC 61508](#)
- [IEC 61508-7](#)

IEC 61508-7

International Standard IEC 61508-7

Functional safety of electrical / electronic / programmable electronic safety related systems

Part 7: Overview on techniques and measures

Year: 2000

See also

- [IEC 61508](#)
- [IEC 61508-3](#)

IEEE 1012

International Standard IEEE 1012

IEEE Standard for Software Verification and Validation

Year: 1986

This standard has been superseded.

Access

Online IEEE Catalog: <http://standards.ieee.org/findstds/standard/1012-1998.html>

IEEE 1058

International Standard IEEE 1058

IEEE Standard for Software Project Management Plans

Year: 1998

Access

Online IEEE Catalog: <http://standards.ieee.org/findstds/standard/1058-1998.html>

IEEE 1061

International Standard IEEE 1061

Standard for a Software Quality Metrics Methodology

Year: 1998

Access

Online IEEE Catalog: <http://standards.ieee.org/findstds/standard/1061-1998.html>

IEEE 1074

International Standard IEEE 1074

IEEE Standard for Developing Software Life Cycle Processes

Year: 1997

This standard has been superseded.

Access

Online IEEE Catalog: <http://standards.ieee.org/findstds/standard/1074-1997.html>

IEEE 1220

International Standard IEEE 1220-2005

1220-2005 - IEEE Standard for Application and Management of the Systems Engineering Process

Year: 2005

Access

Online IEEE Catalog: <http://standards.ieee.org/findstds/standard/1220-2005.html>

IEEE 1233

International Standard IEEE 1233

IEEE Guide for Developing System Requirements Specifications

Year: 1996

Access

Online IEEE Catalog: <http://standards.ieee.org/findstds/standard/1233-1996.html>

IEEE 1320

International Standard IEEE 1320.2

IEEE Standard for Conceptual Modeling Language - Syntax and Semantics for IDEF1X97 (IDEFobject)

Years: 1998

Access

Online IEEE Catalog:

- <http://standards.ieee.org/findstds/standard/1320.2-1998.html>

IEEE 1362

International Standard IEEE 1362

IEEE Guide for Information Technology - System Definition - Concept of Operations (ConOps) Document

Year: 1998

Access

Online IEEE Catalog: <http://standards.ieee.org/findstds/standard/1362-1998.html>

IEEE 1490

International Standard IEEE 1490

IEEE Guide Adoption of PMI Standard - A Guide to the Project Management Body of Knowledge

Year: 2003

This standard has been withdrawn.

Access

Online IEEE Catalog: <http://standards.ieee.org/findstds/standard/1490-2003.html>

IEEE 610.12

International Standard IEEE 610.12

Standard Glossary of Software Engineering Terminology

Year: 1990

Access

Online IEEE Catalog: <http://standards.ieee.org/findstds/standard/610.12-1990.html>

IEEE 829

International Standard IEEE 829

IEEE Standard for Software Test Documentation

Year: 1983.

This standard has been superseded.

Access

Online IEEE catalog:

- <http://standards.ieee.org/findstds/standard/829-1983.html>

IEEE 830

International Standard IEEE 830

IEEE Recommended Practice for Software Requirements Specifications

Year: 1998.

Access

Online IEEE catalog:

- <http://standards.ieee.org/findstds/standard/830-1998.html>

IEEE 982

International Standard IEEE 982

IEEE Standard Dictionary of Measures to Produce Reliable Software

Year: 1988.

Access

Online IEEE catalog:

- <http://standards.ieee.org/findstds/standard/982.1-1988.html>

ISO 5806

International Standard ISO 5806

Information processing—Specification of single-hit decision tables

Year: 1984

Access

Online ISO Catalog: http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=11954

ISO 8402

Quality management and quality assurance - Vocabulary

Year: 1994

ISO 9001

International Standard ISO 9001.

Quality systems - Model for quality assurance in design, development, production, installation and servicing

Year: 1994, 2000, 2008.

Access

Online ISO catalog: http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=46486

ISO 9127

International Standard ISO 9127

Information processing systems—User documentation and cover information for consumer software packages

Year: 1988.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=16723

ISO 9241

International Standard ISO 9241

Ergonomic requirements for office work with visual display terminals (VDTs)

Years: 1992-2011.

Contents / Access

The following parts link to the online ISO catalog:

- [Part 1: General introduction](#)
- [Part 2: Guidance on task requirements](#)
- [Part 4: Keyboard requirements](#)
- [Part 5: Workstation layout and postural requirements](#)
- [Part 6: Guidance on the work environment](#)
- [Part 9: Requirements for non-keyboard input devices](#)
- [Part 11: Guidance on usability](#)

- Part 12: Presentation of information
- Part 13: User guidance
- Part 14: Menu dialogues
- Part 15: Command dialogues
- Part 16: Direct manipulation dialogues
- Part 17: Form filling dialogues
- Part 20: Accessibility guidelines for information/communication technology (ICT) equipment and services
- Part 100: Introduction to standards related to software ergonomics
- Part 110: Dialogue principles
- Part 129: Guidance on software individualization
- Part 151: Guidance on World Wide Web user interfaces
- Part 171: Guidance on software accessibility
- Part 210: Human-centred design for interactive systems
- Part 300: Introduction to electronic visual display requirements
- Part 302: Terminology for electronic visual displays
- Part 303: Requirements for electronic visual displays
- Part 304: User performance test methods for electronic visual displays
- Part 305: Optical laboratory test methods for electronic visual displays
- Part 306: Field assessment methods for electronic visual displays
- Part 307: Analysis and compliance test methods for electronic visual displays
- Part 308: Surface-conduction electron-emitter displays (SED)
- Part 309: Organic light-emitting diode (OLED) displays
- Part 310: Visibility, aesthetics and ergonomics of pixel defects
- Part 400: Principles and requirements for physical input devices
- Part 410: Design criteria for physical input devices
- Part 420: Selection of physical input devices
- Part 910: Framework for tactile and haptic interaction
- Part 920: Guidance on tactile and haptic interactions

See also

- [ISO 9241-10](#)
- [ISO 9241-11](#)

ISO 9241-10

International Standard ISO 9241-10

Ergonomic requirements for office work with visual display terminals (VDTs)

Part 10: Dialogue principles

Year: 1996.

This standard is withdrawn, and revised by ISO 9241-110:2006

Access

Online ISO Catalog: http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=16882

See also

- [ISO 9241](#)

ISO 9241-11

International Standard ISO 9241-11

Ergonomic requirements for office work with visual display terminals (VDTs)

Part 11: Guidance on usability

Year: 1998.

Contents

Extract from www.ansi.org:

ISO 9241-11 defines usability and explains how to identify the information which is necessary to take into account when specifying or evaluating usability of a visual display terminal in terms of measures of user performance and satisfaction. Guidance is given on how to describe the context of use of the product (hardware, software or service) and the relevant measures of usability in an explicit way. The guidance is given in the form of general principles and techniques, rather than in the form of requirements to use specific methods.

The guidance in ISO 9241-11 can be used in procurement, design, development, evaluation, and communication of information about usability. ISO 9241-11 includes guidance on how the usability of a product can be specified and evaluated. It applies both to products intended for general application and products being acquired for or being developed within a specific organization.

ISO 9241-11 also explains how measures of user performance and satisfaction can be used to measure how any component of a work system affects the whole work system in use. The guidance includes procedures for measuring usability but does not detail all the activities to be undertaken. Specification of detailed user-based methods of measurement is beyond the scope of ISO 9241-11, but further information can be found in Annex B and the bibliography in Annex E.

ISO 9241-11 applies to office work with visual display terminals. It can also apply in other situations where a user is interacting with a product to achieve goals. ISO 9241 parts 12 to 17 provide conditional recommendations which are applicable in specific contexts of use. The guidance in this Part of ISO 9241 can be used in conjunction with ISO 9241 Parts 12 to 17 in order to help identify the applicability of individual recommendations.

ISO 9241-11 focuses on usability and does not provide comprehensive coverage of all objectives of ergonomic design referred to in ISO 6385. However, design for usability will contribute positively to ergonomic objectives, such as the reduction of possible adverse effects of use on human health, safety and performance.

ISO 9241-11 does not cover the processes of system development. Human-centred design processes for interactive systems are described in ISO 13407.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=16883

See also

- [ISO 9241](#)

ISO/IEC 12119

Information technology - Software packages - Quality requirements and testing

Year: 1994

ISO/IEC 12207

International Standard ISO/IEC 12207

Information technology—Software lifecycle processes

Year: 1995, 2008.

Access

Online ISO/IEC Catalog: http://www.iso.org/iso/catalogue_detail.htm?csnumber=43447

ISO/IEC 14143

International Standard ISO/IEC 14143

Information technology—Software measurement—Functional size measurement

Contents

- [Part 1: Definition of concepts](#)
 - Part 2: Conformity evaluation of software size measurement methods to ISO/IEC 14143-1:1998
- [Part 3: Verification of functional size measurement methods](#)
 - Part 4: Reference model
 - Part 5: Determination of functional domains for use with functional size measurement
 - Part 6: Guide for use of ISO/IEC 14143 series and related International Standards

See also

Standards:

- [ISO/IEC 14143-1](#)
- [ISO/IEC 14143-3](#)

ISO/IEC 14143-1

International Standard ISO/IEC 14143-1

Information technology—Software measurement—Functional size measurement

Part 1: Definition of concepts

Years: 1998, 2007.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=38931

See also

Standards:

- [ISO/IEC 14143](#)
- [ISO/IEC 14143-3](#)

ISO/IEC 14143-3

International Standard ISO/IEC 14143-1

Information technology—Software measurement—Functional size measurement

Part 3: Verification of functional size measurement methods

Year: 2003.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=31918

See also

Standards:

- [ISO/IEC 14143](#)
- [ISO/IEC 14143-1](#)

ISO/IEC 14598

International Standard ISO/IEC 14598.

Information technology—Software product evaluation

Contents / Access

Online ISO/IEC catalog:

- [Part 1: General overview](#)
- [Part 2: Planning and management](#)
- [Part 3: Process for developers](#)
- [Part 4: Process for acquirers](#)
- [Part 5: Process for evaluators](#)
- [Part 6: Documentation of evaluation modules](#)

See also

- [ISO/IEC 14598-1](#)
- [ISO/IEC 14598-2](#)
- [ISO/IEC 14598-3](#)
- [ISO/IEC 14598-4](#)
- [ISO/IEC 14598-5](#)
- [ISO/IEC 14598-6](#)

ISO/IEC 14598-1

International Standard ISO/IEC 14598-1

Information technology - Software product evaluation

Part 1: General overview

Year: 1999

This standard is revised by the [ISO/IEC 25040:2011](#) standard.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=24902

See also

- [ISO/IEC 14598](#)
- [ISO/IEC 14598-2](#)
- [ISO/IEC 14598-3](#)
- [ISO/IEC 14598-4](#)
- [ISO/IEC 14598-5](#)
- [ISO/IEC 14598-6](#)

ISO/IEC 14598-2

International Standard ISO/IEC 14598-2

Information technology - Software product evaluation

Part 2: Planning and management

Year: 2000.

This standard is revised by the [ISO/IEC 25001:2007](#) standard.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=24903

See also

- [ISO/IEC 14598](#)
- [ISO/IEC 14598-1](#)
- [ISO/IEC 14598-3](#)
- [ISO/IEC 14598-4](#)
- [ISO/IEC 14598-5](#)
- [ISO/IEC 14598-6](#)

ISO/IEC 14598-3

International Standard ISO/IEC 14598-3

Information technology - Software product evaluation

Part 3: Process for developers

Year: 2000.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=24904

See also

- [ISO/IEC 14598](#)
- [ISO/IEC 14598-1](#)
- [ISO/IEC 14598-2](#)
- [ISO/IEC 14598-4](#)
- [ISO/IEC 14598-5](#)
- [ISO/IEC 14598-6](#)

ISO/IEC 14598-4

International Standard ISO/IEC 14598-4

Information technology - Software product evaluation

Part 4: Process for acquirers

Year: 1999.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=24905

See also

- [ISO/IEC 14598](#)
- [ISO/IEC 14598-1](#)
- [ISO/IEC 14598-2](#)
- [ISO/IEC 14598-3](#)
- [ISO/IEC 14598-5](#)
- [ISO/IEC 14598-6](#)

ISO/IEC 14598-5

International Standard ISO/IEC 14598-5

Information technology - Software product evaluation

Part 5: Process for evaluators

Year: 1998

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=24906

See also

- [ISO/IEC 14598](#)
- [ISO/IEC 14598-1](#)
- [ISO/IEC 14598-2](#)
- [ISO/IEC 14598-3](#)
- [ISO/IEC 14598-4](#)
- [ISO/IEC 14598-6](#)

ISO/IEC 14598-6

International Standard ISO/IEC 14598-6

Information technology - Software product evaluation

Part 6: Documentation of evaluation modules

Year: 2001.

This standard is revised by the ISO/IEC DIS 25041 standard.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=24907

See also

- [ISO/IEC 14598](#)
- [ISO/IEC 14598-1](#)
- [ISO/IEC 14598-2](#)
- [ISO/IEC 14598-3](#)
- [ISO/IEC 14598-4](#)
- [ISO/IEC 14598-5](#)

ISO/IEC 14756

International Standard ISO/IEC 14756

Information technology—Measurement and rating of performance of computer-based software systems

Year: 1999

Access

Online IEEE Catalog: http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=25492

ISO/IEC 14764

International Standard ISO/IEC 14764

Software Engineering—Software Life Cycle Processes—Maintenance

Years: 1999, 2006.

Access

Online IEEE Catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=39064

ISO/IEC 15026

International Standard ISO/IEC 15026

Information technology—System and software integrity levels

Year: 1998, 2010, 2011.

Access

Online ISO Catalog:

- [Part 1: Concepts and vocabulary](#)
- [Part 2: Assurance case](#)

See also

- [ISO/IEC 15026-1](#)
- [ISO/IEC 15026-2](#)

ISO/IEC 15026-1

International Standard ISO/IEC 15026-1

Systems and software engineering—Systems and software assurance—Part 1: Concepts and vocabulary

Year: 2010.

See also

- [ISO/IEC 15026](#)
- [ISO/IEC 15026-2](#)

ISO/IEC 15026-2

International Standard ISO/IEC 15026-2

Systems and software engineering—Systems and software assurance—Part 2: Assurance case

Year: 2011.

See also

- [ISO/IEC 15026](#)

- [ISO/IEC 15026-1](#)

ISO/IEC 15288

International Standard ISO/IEC 15288.

Systems and software engineering—System life cycle processes

Years: 2002.

Access

Online ISO catalog:

- http://www.iso.org/iso/catalogue_detail?csnumber=43564

See also

Standards:

- [ISO/IEC 12207](#)

External Links:

- <http://www.15288.com>

ISO/IEC 15289

International Standard ISO/IEC 15289.

Systems and software engineering—Content of systems and software life cycle process information products (Documentation)

Year: 2006.

This standard is revised by the [ISO/IEC/IEEE 15289](#) standard.

Access

Online ISO catalog:

- http://www.iso.org/iso/catalogue_detail?csnumber=43790

See also

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC/IEEE 15289](#)

ISO/IEC 15414

International Standard ISO/IEC 15414

Information technology—Open distributed processing—Reference model—Enterprise language

Years: 2002, 2006.

Access

Online IEEE Catalog: http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=43767

ISO/IEC 15474

International Standard ISO/IEC 15474

Information technology—CDIF framework

Contents

- [Part 1: Overview](#)
- [Part 2: Modelling and extensibility](#)

See also

- [ISO/IEC 15474-1](#)
- [ISO/IEC 15474-2](#)

ISO/IEC 15474-1

International Standard 15474-1

Information technology—CDIF framework

Part 1: Overview

Year: 2002.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=27825

See also

Standards:

- [ISO/IEC 15474](#)
- [ISO/IEC 15474-2](#)

ISO/IEC 15474-2

International Standard 15474-2

Information technology—CDIF framework

Part 2: Modelling and extensibility

Year: 2002.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=29029

See also

Standards:

- [ISO/IEC 15474](#)
- [ISO/IEC 15474-1](#)

ISO/IEC 15504

International Standard ISO/IEC 15504.

Information technology - Software Process Assessment

Also known as SPICE—Software Process Improvement and Capability dEtermination.

Years: 1998, 2003, 2004, 2008.

Contents

- [Part 1: Concepts and vocabulary](#)
- [Part 2: Performing an assessment](#)
- [Part 3: Guidance on performing an assessment](#)
- [Part 4: Guidance on use for process improvement and process capability determination](#)
- [Part 5: An exemplar Process Assessment Model](#)
- [Part 6: An exemplar system life cycle process assessment model](#)
- [Part 7: Assessment of organizational maturity](#)

See also

Standards:

- [ISO/IEC 15504-1](#)
- [ISO/IEC 15504-2](#)
- [ISO/IEC 15504-3](#)
- [ISO/IEC 15504-4](#)

- [ISO/IEC 15504-5](#)
- [ISO/IEC 15504-6](#)
- [ISO/IEC 15504-7](#)

External Links:

- <http://www.spiceusergroup.org>

ISO/IEC 15504-1

International Standard ISO/IEC 15504.

Information technology - Software Process Assessment

Part 1: Concepts and vocabulary

Year: 1998, 2004.

This standard revises the ISO/IEC TR 15504-1:1998 and ISO/IEC TR 15504-9:1998 standards.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=38932

See also

Standards:

- [ISO/IEC 15504](#)
- [ISO/IEC 15504-2](#)
- [ISO/IEC 15504-3](#)
- [ISO/IEC 15504-4](#)
- [ISO/IEC 15504-5](#)
- [ISO/IEC 15504-6](#)
- [ISO/IEC 15504-7](#)

ISO/IEC 15504-2

International Standard ISO/IEC 15504.

Information technology - Software Process Assessment

Part 2: Performing an assessment

Year: 1998, 2003.

This standard revises the ISO/IEC TR 15504-2:1998 and ISO/IEC TR 15504-3:1998 standards.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=37458

See also

Standards:

- [ISO/IEC 15504](#)
- [ISO/IEC 15504-1](#)
- [ISO/IEC 15504-3](#)
- [ISO/IEC 15504-4](#)
- [ISO/IEC 15504-5](#)
- [ISO/IEC 15504-6](#)
- [ISO/IEC 15504-7](#)

ISO/IEC 15504-3

International Standard ISO/IEC 15504.

Information technology - Software Process Assessment

Part 3: Guidance on performing an assessment

Year: 1998, 2004.

This standard revises the ISO/IEC TR 15504-4:1998 and ISO/IEC TR 15504-6:1998 standards.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=37454

See also

Standards:

- [ISO/IEC 15504](#)
- [ISO/IEC 15504-1](#)
- [ISO/IEC 15504-2](#)
- [ISO/IEC 15504-4](#)
- [ISO/IEC 15504-5](#)
- [ISO/IEC 15504-6](#)
- [ISO/IEC 15504-7](#)

ISO/IEC 15504-4

International Standard ISO/IEC 15504.

Information technology - Software Process Assessment

Part 4: Guidance on use for process improvement and process capability determination

Year: 1998, 2004.

This standard revises the ISO/IEC TR 15504-7:1998 and ISO/IEC TR 15504-8:1998 standards.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=37462

See also

Standards:

- [ISO/IEC 15504](#)
- [ISO/IEC 15504-1](#)
- [ISO/IEC 15504-2](#)
- [ISO/IEC 15504-3](#)
- [ISO/IEC 15504-5](#)
- [ISO/IEC 15504-6](#)
- [ISO/IEC 15504-7](#)

ISO/IEC 15504-5

International Standard ISO/IEC 15504.

Information technology - Software Process Assessment

Part 5: An exemplar Process Assessment Model

Year: 1998, 2006.

This standard revises the ISO/IEC TR 15504-5:1998 standard.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=37462

See also

Standards:

- [ISO/IEC 15504](#)
- [ISO/IEC 15504-1](#)
- [ISO/IEC 15504-2](#)
- [ISO/IEC 15504-3](#)

- [ISO/IEC 15504-4](#)
- [ISO/IEC 15504-6](#)
- [ISO/IEC 15504-7](#)

ISO/IEC 15504-6

International Standard ISO/IEC 15504.

Information technology - Software Process Assessment

Part 6: An exemplar system life cycle process assessment model

Year: 1998, 2008.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=43446

See also

Standards:

- [ISO/IEC 15504](#)
- [ISO/IEC 15504-1](#)
- [ISO/IEC 15504-2](#)
- [ISO/IEC 15504-3](#)
- [ISO/IEC 15504-4](#)
- [ISO/IEC 15504-5](#)
- [ISO/IEC 15504-7](#)

ISO/IEC 15504-7

International Standard ISO/IEC 15504.

Information technology - Software Process Assessment

Part 7: Assessment of organizational maturity

Year: 1998, 2008.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=50519

See also

Standards:

- [ISO/IEC 15504](#)
- [ISO/IEC 15504-1](#)
- [ISO/IEC 15504-2](#)
- [ISO/IEC 15504-3](#)
- [ISO/IEC 15504-4](#)
- [ISO/IEC 15504-5](#)
- [ISO/IEC 15504-6](#)

ISO/IEC 15846

International Standard ISO/IEC 15846

Information technology—Software life cycle processes—Configuration Management

Year: 1998.

This standard has been withdrawn.

Access

Online ISO Catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=30516

See also

Standards:

- [ISO/IEC 12207](#)

ISO/IEC 15910

International Standard ISO/IEC 15910.

Information technology—Software user documentation process

Year:1999.

This standard is revised by the ISO/IEC 26512:2011 standard.

Notes

Extract from www.techstreet.com:

This International Standard specifies the minimum process for creating all forms of user documentation for software which has a user interface. Such forms of documentation include printed documentation (e.g. user manuals and quick-reference cards), on-line documentation, help text and on-line documentation systems.

This International Standard conforms with ISO/IEC 12207:1995, Information technology Software life cycle processes, as an implementation of the user documentation part of 6.1: Documentation.

If effectively applied, this International Standard will support the development of documentation

which meets the needs of the users.

This International Standard is intended for use by anyone who produces or buys user documentation.

This International Standard is applicable to not only printed documentation, but also help screens, the help delivery system, and the on-line text and delivery system.

This International Standard is intended for use in a two-party situation and may be equally applied where the two parties are from the same organization. The situation may range from an informal agreement up to a legally binding contract. This International Standard may be used by a single party as self-imposed tasks.

ISO/IEC 15939

International Standard ISO/IEC 15939

Software engineering - Software measurement process

Year: 2002, 2007.

Access

Online ISO Catalog:

- [ISO/IEC 15939:2007](#)

See also

ISO/IEC 19759

International Standard ISO/IEC 19759

Software Engineering—Guide to the Software Engineering Body of Knowledge (SWEBOK)

Year: 2005.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=33897

See also

External Links:

- <http://www.computer.org/portal/web/swebok>

ISO/IEC 19770

International Standard ISO/IEC 19770

Contents

- [Part 1: Processes](#)
- [Part 2: Software identification tag](#)

See also

Standards:

- [ISO/IEC 19770-1](#)
- [ISO/IEC 19770-2](#)

External Links:

- <http://www.19770.org>

ISO/IEC 19770-1

International Standard ISO/IEC 19770-1

Information technology—Software asset management

Part 1: Processes

Year: 2006.

Access

Online ISO catalog:

- http://www.iso.org/iso/catalogue_detail?csnumber=33908

See also

- [ISO/IEC 19770](#)
- [ISO/IEC 19770-2](#)

ISO/IEC 19770-2

International Standard ISO/IEC 19770-2

Information technology—Software asset management

Part 2: Software identification tag

Year: 2009.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=53670

See also

- [ISO/IEC 19770](#)
- [ISO/IEC 19770-1](#)

ISO/IEC 20000

International Standard ISO/IEC 20000

Information technology—Service management

Contents/Access

This list links to the online ISO catalog:

- [Part 1: Specification](#)
- [Part 2: Code of practice](#)
- [Part 3: Guidance on scope definition and applicability of ISO/IEC 20000-1](#)
- [Part 4: Process reference model](#)
- [Part 5: Exemplar implementation plan for ISO/IEC 20000-1](#)

ISO/IEC 2382

International Standard ISO/IEC 2382

Information processing systems—Vocabulary

Contents

- [Part 1: Quality Model](#)
- [Part 2: Arithmetic and logic operations](#)
- [Part 3: Equipment technology](#)
- [Part 4: Organization of data](#)
- [Part 5: Representation of data](#)
- [Part 6: Preparation and handling of data](#)
- [Part 7: Computer programming](#)
- [Part 8: Security](#)
- [Part 9: Data communication](#)
- [Part 10: Operating techniques and facilities](#)
- [Part 12: Peripheral equipment](#)
- [Part 13: Computer graphics](#)
- [Part 14: Reliability, maintainability and availability](#)
- [Part 15: Programming languages](#)
- [Part 16: Information theory](#)
- [Part 17: Databases](#)
- [Part 18: Distributed data processing](#)

- Part 19: Analog computing
- Part 20: System development
- Part 21: Interfaces between process computer systems and technical processes
- Part 23: Text processing
- Part 24: Computer-integrated manufacturing
- Part 25: Local area networks
- Part 26: Open systems interconnection
- Part 27: Office automation
- Part 28: Artificial intelligence—Basic concepts and expert systems
- Part 29: Artificial intelligence—Speech recognition and synthesis
- Part 31: Artificial intelligence—Machine learning
- Part 32: Electronic Mail
- Part 34: Artificial intelligence—Neural networks
- Part 36: Learning, education and training

See also

- [ISO/IEC 2382-1](#)

ISO/IEC 2382-1

International Standard ISO/IEC 2382

Information technology - Vocabulary

Part 1: Fundamental terms

Year: 1993.

Access

Online ISO Catalog: http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=7229

See also

Standards:

- [ISO/IEC 2382](#)

ISO/IEC 25000

International Standard ISO/IEC 25000

Software Engineering—Software product Quality Requirements and Evaluation (SQuaRE)—Guide to SQuaRE.

year: 2005.

This series of standards revises the ISO/IEC 9126 and ISO/IEC 14598 series.

Access

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=35683

See also

- [ISO/IEC 9126](#)
- [ISO/IEC 14598](#)
- [ISO/IEC SQaRE](#)

ISO/IEC 25001

International Standard ISO/IEC 25001

Software engineering—Software product Quality Requirements and Evaluation (SQaRE)—Planning and management

year: 2007.

This standard revises the [ISO/IEC 14598-2](#).

Access

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=35724

See also

Standards:

- [ISO/IEC 9126](#)
- [ISO/IEC 14598](#)
- [ISO/IEC SQaRE](#)

ISO/IEC 25010

International Standard ISO/IEC 25010

Systems and software engineering—Systems and software Quality Requirements and Evaluation (SQaRE)—System and software quality models

year: 2011.

Access

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=35733

See also

- [ISO/IEC 9126](#)
- [ISO/IEC 25000](#)

ISO/IEC 25012

International Standard ISO/IEC 25012

Software engineering—Software product Quality Requirements and Evaluation (SQuaRE)—Data quality model

year: 2008.

Access

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=35736

See also

- [ISO/IEC 9126](#)
- [ISO/IEC 25010](#)
- [ISO/IEC SQuaRE](#)

ISO/IEC 25020

International Standard ISO/IEC 25020

Software engineering—Software product Quality Requirements and Evaluation (SQuaRE)—Measurement reference model and guide

Year: 2007.

Access

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=35744

See also

- [ISO/IEC 25010](#)
- [ISO/IEC 25030](#)
- [ISO/IEC 25040](#)
- [ISO/IEC SQuaRE](#)

ISO/IEC 25021

International Standard ISO/IEC 25021

Software engineering—Software product Quality Requirements and Evaluation (SQuaRE)—Quality measure elements

Year: 2007.

Access

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=35745

See also

- [ISO/IEC 9126](#)
- [ISO/IEC 25030](#)
- [ISO/IEC 25040](#)
- [ISO/IEC SQuaRE](#)

ISO/IEC 25030

International Standard ISO/IEC 25030

Software engineering—Software product Quality Requirements and Evaluation (SQuaRE)—Quality requirements

year: 2007.

Access

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=35765

See also

- [ISO/IEC 9126-1](#)
- [ISO/IEC 25010](#)
- [ISO/IEC SQuaRE](#)

ISO/IEC 25040

International Standard ISO/IEC 25040

Systems and software engineering—Systems and software Quality Requirements and Evaluation (SQuaRE)—Evaluation process

year: 2011.

This standard revises the [ISO/IEC 14598-1](#) standard.

Access

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=35765

See also

- [ISO/IEC 9126](#)
- [ISO/IEC 14598](#)
- [ISO/IEC SQuaRE](#)

ISO/IEC 25045

International Standard ISO/IEC 25045

Systems and software engineering—Systems and software Quality Requirements and Evaluation (SQuaRE)—Evaluation module for recoverability

Year: 2010.

Access

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=35683

See also

- [ISO/IEC SQuaRE](#)

ISO/IEC 25051

International Standard ISO/IEC 25000

Software engineering—Software product Quality Requirements and Evaluation (SQuaRE)—Requirements for quality of Commercial Off-The-Shelf (COTS) software product and instructions for testing

year: 2006, 2007.

This standard revises the [ISO/IEC 12119](#) standard.

Access

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=37457

See also

Glossary:

- [COTS](#)

Standards:

- [ISO/IEC 9126](#)
- [ISO/IEC 14598](#)
- [ISO/IEC SQuaRE](#)

ISO/IEC 25060

International Standard ISO/IEC 25060

Systems and software engineering—Systems and software product Quality Requirements and Evaluation (SQuaRE)—Common Industry Format (CIF) for usability: General framework for usability-related information

Year: 2010.

Access

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=35786

See also

- [ISO/IEC 9126](#)
- [ISO/IEC SQuaRE](#)

ISO/IEC 25062

International Standard ISO/IEC 25062

Software engineering—Software product Quality Requirements and Evaluation (SQuaRE)—Common Industry Format (CIF) for usability test reports

Year: 2006.

Access

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=43046

See also

- [ISO/IEC SQuaRE](#)

ISO/IEC 26514

International Standard ISO/IEC 26514

Systems and software engineering—Requirements for designers and developers of user documentation

Year: 2008

Access

Online IEEE Catalog: http://www.iso.org/iso/catalogue_detail?csnumber=43073

ISO/IEC 29881

International Standard ISO/IEC/IEEE 29881

Information Technology—Software and Systems Engineering

Year: 2008, 2010

Access

Online IEEE Catalog: http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=56418

ISO/IEC 90003

International Standard ISO/IEC 90003

Software engineering—Guidelines for the application of **ISO 9001:2000** to computer software

Year: 2004

Access

Online IEEE Catalog: http://www.iso.org/iso/catalogue_detail?csnumber=35867

ISO/IEC 9126

International Standard ISO/IEC 9126

Software engineering—Product quality


Years: 1991, 2001

This standard is revised by **ISO/IEC 25010:2011**.

Contents

- **Part 1: Quality Model**
- **Part 2: External metrics**
- **Part 3: Internal metrics**
- **Part 4: Quality in use metrics**

Structure

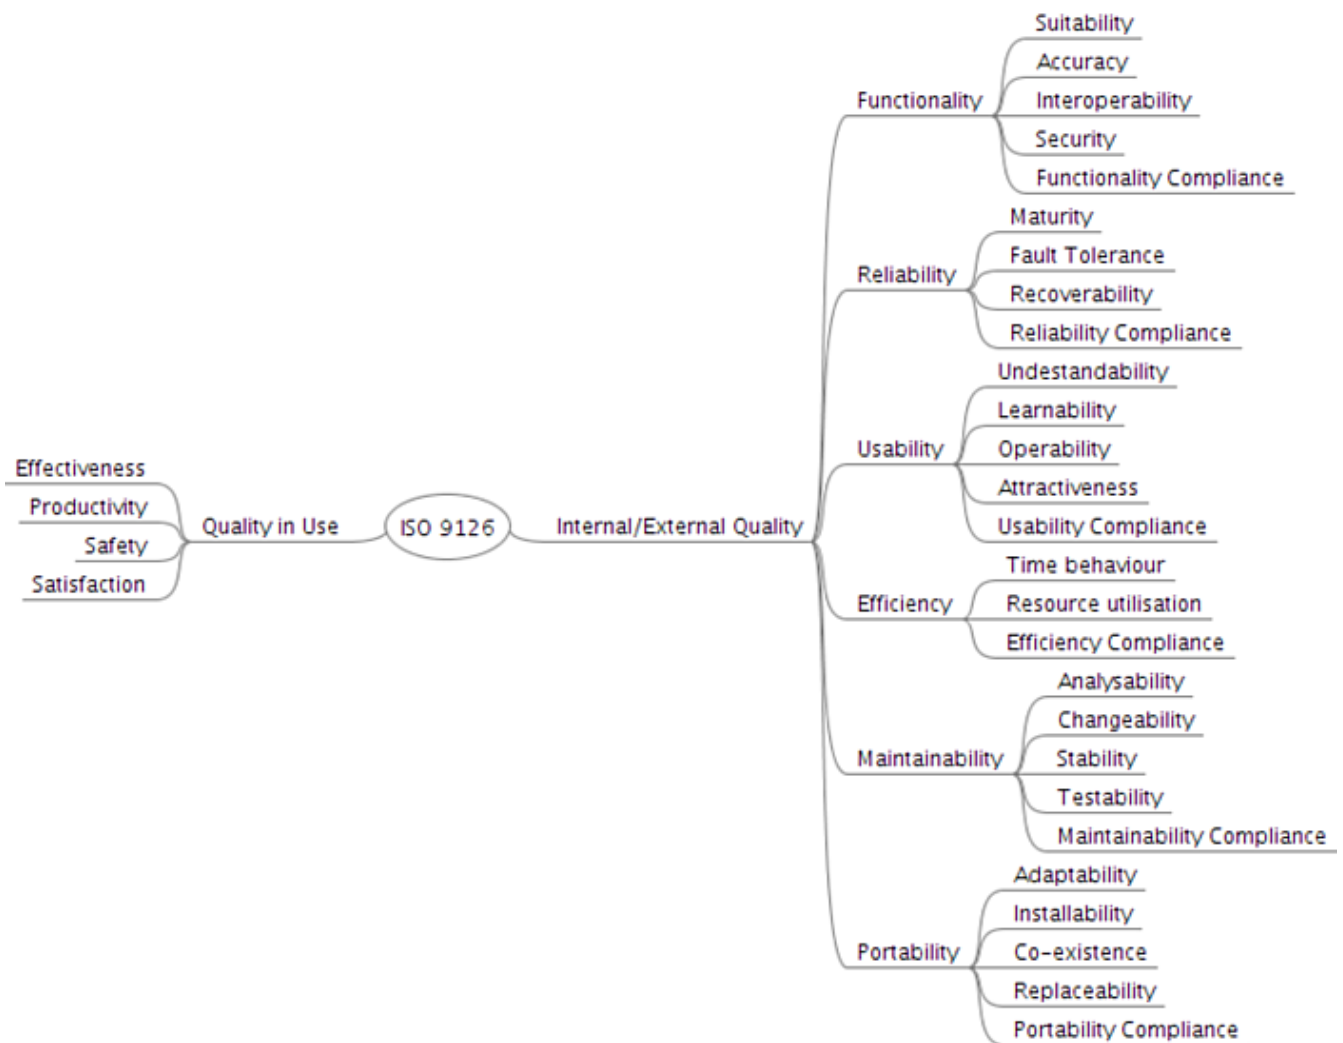

See also

- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-2](#)
- [ISO/IEC 9126-3](#)
- [ISO/IEC 9126-4](#)
- [ISO/IEC 25000](#)
- [ISO/IEC 25010](#)

ISO/IEC 9126-1

International Standard ISO/IEC 9126-1

Software engineering—Product quality

Part 1: Quality Model

Years: 1991, 2001.

This standard is revised by [ISO/IEC 25010:2011](#).

Access

Online ISO Catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_ics/catalogue_detail_ics.htm?csnumber=22749

See also

- [ISO 9001](#)
- [ISO/IEC 9126](#)
- [ISO/IEC 9126-2](#)
- [ISO/IEC 9126-3](#)
- [ISO/IEC 9126-4](#)
- [ISO/IEC 12207](#)
- [ISO/IEC 15504](#)
- [ISO/IEC 14598](#)

ISO/IEC 9126-2

International Standard ISO/IEC 9126-2

Software engineering—Product quality

Part 2: External metrics

Years: 1991, 2001.

This standard is revised by [ISO/IEC 25010:2011](#).

Access

Online ISO Catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=22750

See also

- [ISO/IEC 9126](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-3](#)
- [ISO/IEC 9126-4](#)

ISO/IEC 9126-3

International Standard ISO/IEC 9126-3

Software engineering—Product quality

Part 3: Internal metrics

Years: 1991, 2001.

This standard is revised by [ISO/IEC 25010:2011](#).

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=22891

See also

- [ISO/IEC 9126](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-2](#)
- [ISO/IEC 9126-4](#)

ISO/IEC 9126-4

International Standard ISO/IEC 9126-4

Software engineering—Product quality

Part 4: Quality in use metrics

Years: 1991, 2001, 2004.

This standard is revised by [ISO/IEC 25010:2011](#).

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=39752

See also

- [ISO/IEC 9126](#)
- [ISO/IEC 9126-1](#)
- [ISO/IEC 9126-2](#)
- [ISO/IEC 9126-3](#)

ISO/IEC 9294

International Standard ISO/IEC 9294

Information technology—Guidelines for the management of software documentation

Years: 1990, 2005.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=37460

See also

Glossary:

- [Document](#)
- [Documentation](#)

ISO/IEC 99

International Standard ISO/IEC 99

International vocabulary of metrology—Basic and general concepts and associated terms

Years: 1993, 2007.

See also

- [Joint Committee for Guides in Metrology](#)
- http://www.iso.org/sites/JCGM/VIM/JCGM_200e.html

ISO/IEC SQuaRE

International Standard ISO/IEC SQuaRE

Systems and software Quality Requirements and Evaluation (SQuaRE)

SQuaRE is a series of International Standards (25000-25099) edited by the ISO/IEC organisation and related to Systems and Software Quality.


It is composed of the following ISO/IEC standards:

- [ISO/IEC 25000—Guide to SQuaRE](#)
- [ISO/IEC 25001—Planning and management](#)
- [ISO/IEC 25010—System and software quality models](#)
- [ISO/IEC 25012—Data quality model](#)
- [ISO/IEC 25020—Measurement reference model and guide](#)
- [ISO/IEC 25021—Quality measure elements](#)
- [ISO/IEC 25030—Quality requirements](#)
- [ISO/IEC 25040—Evaluation process](#)
- [ISO/IEC 25045—Evaluation module for recoverability](#)
- [ISO/IEC 25051—Requirements for quality of Commercial Off-The-Shelf \(COTS\) software product and instructions for testing](#)
- [ISO/IEC 25060—Common Industry Format \(CIF\) for usability: General framework for usability-related information](#)

- [ISO/IEC 25062—Common Industry Format \(CIF\) for usability test reports](#)

They are meant to replace older standards addressing the same topics, mainly (but not only) [ISO/IEC 9126](#) and [ISO/IEC 14598](#).

Structure

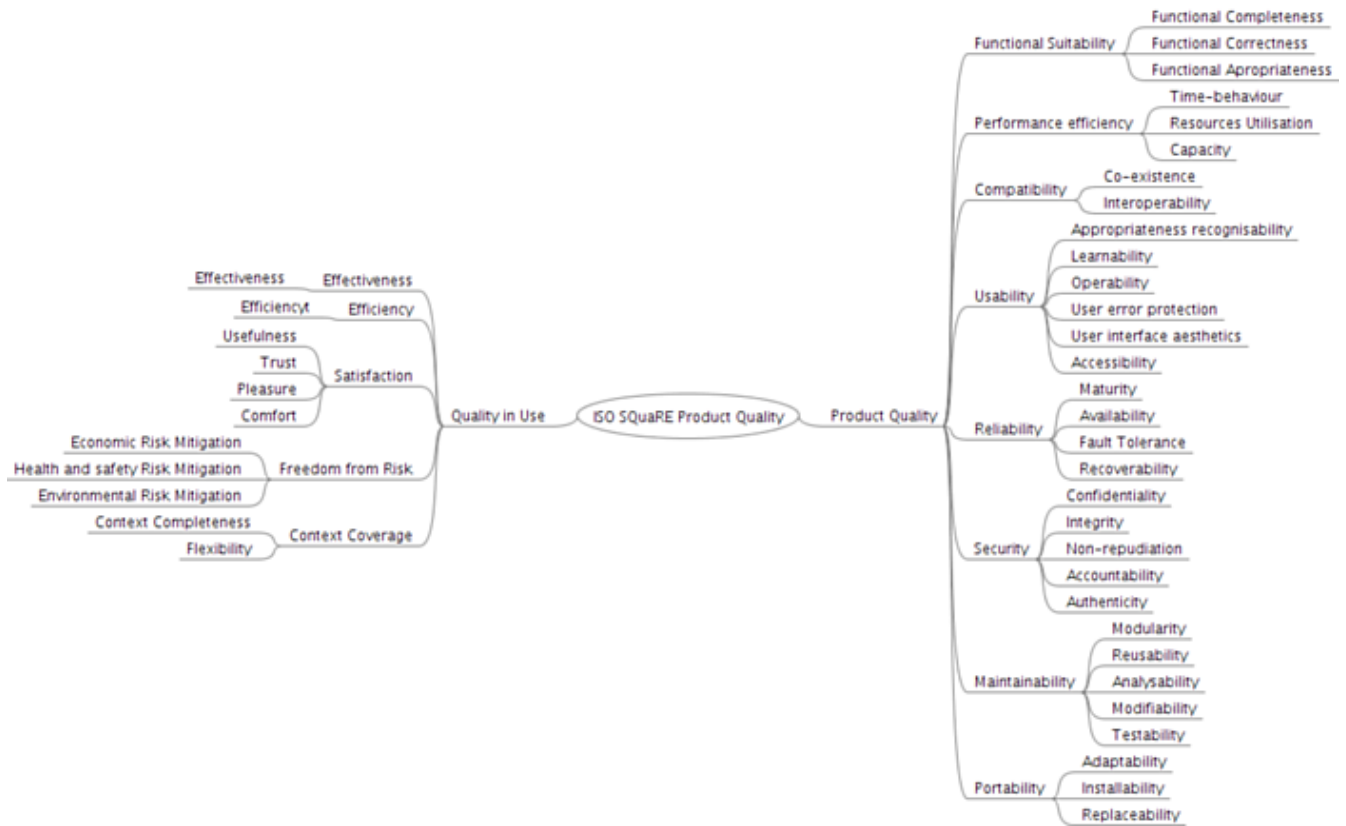

See also

- [ISO/IEC 9126](#)
- [ISO/IEC 14598](#)
- [ISO/IEC 25000](#)
- [ISO/IEC 25001](#)
- [ISO/IEC 25010](#)
- [ISO/IEC 25012](#)
- [ISO/IEC 25020](#)
- [ISO/IEC 25021](#)
- [ISO/IEC 25030](#)
- [ISO/IEC 25040](#)
- [ISO/IEC 25045](#)
- [ISO/IEC 25051](#)
- [ISO/IEC 25060](#)
- [ISO/IEC 25062](#)

ISO/IEC/IEEE 15289

International Standard ISO/IEC/IEEE 15289.

Systems and software engineering—Content of life-cycle information products (documentation)

Years: 2006, 2011.

This standard revises the [ISO/IEC 15289](#) standard.

Access

Online ISO catalog:

- http://www.iso.org/iso/iso_catalogue/catalogue_ics/catalogue_detail_ics.htm?csnumber=54388

See also

Standards:

- [ISO/IEC 12207](#)
- [ISO/IEC 15288](#)
- [ISO/IEC 15289](#)
- [ISO/IEC 20000](#)

ISO/IEC/IEEE 24765

International Standard ISO/IEC/IEEE 24765

Systems and software engineering—Vocabulary

First edition: 2010-12-15

Access

Online IEEE Catalog: http://www.iso.org/iso/catalogue_detail.htm?csnumber=50518

RTCA/EUROCAE

Software Considerations in Airborne Systems and Equipments Certification

Requirements and Technical Concepts for Aviation - RTCA SC167/DO-178B

European Organization for Civil Aviation Electronics - EUROCAE ED-12B

SIGIST

Glossary of terms used in Software testing

British Computer Society - Specialist Interest Group In Software Testing

Team Software Process

Team Software Process is a process developed by the Carnegie-Mellon Software Engineering Institute.

The Team Software Process (TSP) helps engineering teams develop and deliver high-quality software-intensive systems within planned cost and schedule commitments. TSP integrates software engineering, estimating, planning and tracking, quality management, and self-directed teaming concepts into a defined process and measurement framework. TSP was designed to be easily integrated with an organization's existing practices, and complements CMMI.

See also

- [CMMi](#)
- www.sei.cmu.edu/tsp/

Appendix A: Data Provider Frameworks

Current Frameworks

The following Data Provider frameworks support importing all kinds of data into Squire. Whether you choose one or the other depends on the ability of your script or executable to produce CSV or XML data. Note that these frameworks are recommended over the legacy frameworks described in [Legacy Frameworks](#), which are deprecated as of Squire 18.0.

csv_import Reference

```
=====
= csv_import =
=====
```

The `csv_import` framework allows you to create Data Providers that produce CSV files that the framework will translate into XML files that can be imported in your analysts results. This framework is useful if writing XML files directly from your script is not practical.

Using `csv_import`, you can import metrics, findings (including relaxed findings), textual information, and links between artefacts (including to and from source code artefacts).

This framework replaces all the legacy frameworks that wrote CSV files in previous versions.

Note that this framework can be called by your Data Provider simply by creating an `exec-tool` phase that calls the part of the framework located in the configuration folder:

```
<exec-tool name="csv_import">
  <param key="csv" value="{getOutputFile(output.csv)}" />
  <param key="separator" value=";" />
  <param key="delimiter" value="&quot;" />
</exec-tool>
```

For a full description of all the parameters that can be used, consult the section called "CSV Import" in the "Data Providers" chapter of this manual.

```
=====
= CSV format expected by the data provider =
=====
```

- Line to define an artefact (like a parent artefact for instance):
Artefact

- Line to add n metrics to an artefact:
Artefact;(MetricId;Value)*

- Line to add n infos to an artefact:
Artefact;(InfoId;Value)*
- Line to add a key to an artefact:
Artefact;Value
- Line to add a finding to an artefact:
Artefact;RuleId;Message;Location
- Line to add a relaxed finding to an artefact:
Artefact;RuleId;Message;Location;RelaxStatus;RelaxMessage
- Line to add a link between artefacts:
Artefact;LinkId;Artefact

where:

- MetricId is the id of the metric as declared in the Analysis Model
- InfoId is the id of the information to import
- Value is the value of the metric or the information or the key to import (a key is a UUID used to reference an artefact)
- RuleId is the id of the rule violated as declared in the Analysis Model
- Message is the message of the finding, which is displayed after the rule description
- Location is the location of the finding (a line number for findings attached source code artefacts, a url for findings attached to any other kind of artefact)
- RelaxStatus is one of DEROGATION, FALSE_POSITIVE or LEGACY and defines the relaxation stat of the imported finding
- RelaxMessage is the justification message for the relaxation state of the finding
- LinkId is the id of the link to create between artefacts, as declared in the Analysis Model

```
=====
= Manipulating Artefacts =
=====
```

The following functions are available to locate and manipulate source code artefacts in the project:

- `${artefact(type,path)}` ==> Identify an artefact by its type and full path
- `${artefact(type,path,uid)}` ==> Identify an artefact by its type and full path and assign it the unique identifier uid
- `${uid(value)}` ==> Identify an artefact by its unique identifier (value)
- `${file(path)}` ==> Tries to find a source code file matching the "path" in the project
- `${function(fpath,line)}` ==> Tries to find a source code function at line "line" in file matching the "fpath" in the project
- `${function(fpath,name)}` ==> Tries to find a source code function whose name matches "name" in the file matching the "fpath" in the project
- `${class(fpath,line)}` ==> Tries to find a source code class at line "line" in the file matching the "fpath" in the project
- `${class(fpath,name)}` ==> Tries to find a source code class whose name matches "name" in the file matching the "fpath" in the project


```
=====
= Input Files =
=====
```

The data provider accepts the following files:

Metrics file accepts:

- Artefact definition line
- Metrics line

Findings file accepts:

- Artefact definition line
- Findings line

Keys file accepts:

- Artefact definition line
- Keys line

Information file accepts:

- Artefact definition line
- Information line

Links file accepts:

- Artefact definition line
- Links line

It is also possible to mix every kind of line in a single csv file, as long as each line is prefixed with the kind of data it contains.

In this case, the first column must contain one of:

DEFINE (or D): when the line is used to define an artefact

METRIC (or M): to add a metric

INFO (or I): to add an information

KEY (or K): to add a key

FINDING (or F): to add a finding, relaxed or not

LINK (or L): to add link between artefacts

The following is an example of a csv file containing mixed lines:

```
D;${artefact(CR_FOLDER,/CRsCl)}
M;${artefact(CR,/CRsCl/cr2727,2727)};NB;2
M;${artefact(CR,/CRsCl/cr1010,1010)};NB;4
I;${uid(1010)};NBI;Bad weather
K;${artefact(CR,/CRsCl/cr2727,2727)};#CR2727
I;${artefact(CR,/CRsCl/cr2727,2727)};NBI;Nice Weather
F;${artefact(CR,/CRsCl/cr2727,2727)};BAD;Malformed
M;${uid(2727)};NB_EXT;3
I;${uid(2727)};NBI_EXT;Another Info
F;${uid(2727)};BAD_EXT;Badlyformed
F;${uid(2727)};BAD_EXT1;Badlyformed1;;FALSE_POSITIVE;Everything is in the title]]>
F;${function(machine.c,41)};R_GOTO;"No goto; neither togo;";41
F;${function(machine.c,42)};R_GOTO;No Goto;42;LEGACY;Was done a long time ago
L;${uid(1010)};CR2CR;${uid(2727)}
L;${uid(2727)};CR2CR;${uid(1010)}
```

```
=====  
= xml =  
=====
```

The xml framework is an implementation of a data provider that allows to import an xml file, potentially after an xsl transformation. The transformed XML file is expected to follow the syntax expected by other data providers (see input-data.xml specification).

This framework can be extended like the other frameworks, by creating a folder for your data provider in your configuration/tools folder and creating a form.xml. Following are three examples of the possible uses of this framework.

Example 1 - User enters an xml path and an xsl path, the xml is transformed using the xsl and then imported

```
=====
<?xml version="1.0" encoding="UTF-8"?>
<tags baseName="xml">
  <tag type="text" key="xml" />
  <tag type="text" key="xslt" />

  <exec-phase id="add-data">
    <exec name="java" failOnError="true" failOnStdErr="true">
      <arg value="{javaClasspath(groovy,xml-resolver-1.2.jar)}"/>
      <arg value="groovy.lang.GroovyShell" />
      <arg value="xml.groovy" />
      <arg value="{outputDirectory}" />
      <arg tag="xml"/>
      <arg tag="xsl" />
    </exec>
  </exec-phase>
</tags>
```

Example 2 - The user enter an xml path, the xsl file is predefined (input-data.xsl) and present in the same directory as form.xml

```
=====
<?xml version="1.0" encoding="UTF-8"?>
<tags baseName="xml">
  <tag type="text" key="xml" />

  <exec-phase id="add-data">
    <exec name="java" failOnError="true" failOnStdErr="true">
      <arg value="{javaClasspath(groovy,xml-resolver-1.2.jar)}"/>
      <arg value="groovy.lang.GroovyShell" />
      <arg value="xml.groovy" />
      <arg value="{outputDirectory}" />
      <arg tag="xml" />
      <arg value="{getToolConfigDir(input-data.xsl)}" />
    </exec>
  </exec-phase>
</tags>
```

```

</exec>
</exec-phase>
</tags>

```

Example 3 - The user enter an xml path of a file already in the expected format

=====

```

<?xml version="1.0" encoding="UTF-8"?>
<tags baseName="xml">
  <tag type="text" key="xml" />

  <exec-phase id="add-data">
    <exec name="java" failOnError="true" failOnStdErr="true">
      <arg value="\${javaClasspath(groovy,xml-resolver-1.2.jar)}"/>
      <arg value="groovy.lang.GroovyShell" />
      <arg value="xml.groovy" />
      <arg value="\${outputDirectory}" />
      <arg tag="xml" />
    </exec>
  </exec-phase>
</tags>

```

Legacy Frameworks

	Import Metrics	Import Textual Information	Import Findings	Import Links	Create Artefacts	Parse Subfolders
CSV	✓	✓	✗	✗	✓	✓
csv_findings	✗	✗	✓	✗	✗	✗
CSVPerl	✓	✓	✗	✗	✓	✓
Generic	✓	✓	✓	✓	✓	✗
GenericPerl	✓	✓	✓	✓	✓	✓
FindingsPerl	✗	✗	✓	✗	✗	✓
ExcelMetrics	✓	✓	✓	✗	✓	✓

✓ Supported

✓ Your Perl script needs to handle subfolder parsing

✗ Not Supported

Legacy Data Provider frameworks and their capabilities

1. Csv

The Csv framework is used to import metrics or textual information and attach them to artefacts of type Application or File. While parsing one or more input CSV files, if it finds the same metric for the same artefact several times, it will only use the last occurrence of the metric and ignore the previous ones. Note that the type of artefacts you can attach metrics to is limited to Application and File artefacts. If you are working with File artefacts, you can let the Data Provider create the artefacts by itself if they do not exist already. Refer to the [full Csv Reference](#) for more information.

2. csv_findings

The csv_findings framework is used to import findings in a project and attach them to artefacts of type Application, File or Function. It takes a single CSV file as input and is the only framework that allows you to import relaxed findings directly. Refer to the [full csv_findings](#)

[Reference](#) for more information.

3. CsvPerl

The CsvPerl framework offers the same functionality as Csv, but instead of dealing with the raw input files directly, it allows you to run a perl script to modify them and produce a CSV file with the expected input format for the Csv framework. Refer to the [full CsvPerl Reference](#) for more information.

4. FindingsPerl

The FindingsPerl framework is used to import findings and attach them to existing artefacts. Optionally, if an artefact cannot be found in your project, the finding can be attached to the root node of the project instead. When launching a Data Provider based on the FindingsPerl framework, a perl script is run first. This perl script is used to generate a CSV file with the expected format which will then be parsed by the framework. Refer to the [full FindingsPerl Reference](#) for more information.

5. Generic

The Generic framework is the most flexible Data Provider framework, since it allows attaching metrics, findings, textual information and links to artefacts. If the artefacts do not exist in your project, they will be created automatically. It takes one or more CSV files as input (one per type of information you want to import) and works with any type of artefact. Refer to the [full Generic Reference](#) for more information.

6. GenericPerl

The GenericPerl framework is an extension of the Generic framework that starts by running a perl script in order to generate the metrics, findings, information and links files. It is useful if you have an input file whose format needs to be converted to match the one expected by the Generic framework, or if you need to retrieve and modify information exported from a web service on your network. Refer to the [full GenericPerl Reference](#) for more information.

7. ExcelMetrics

The ExcelMetrics framework is used to extract information from one or more Microsoft Excel files (.xls or .xlsx). A detailed configuration file allows defining how the Excel document should be read and what information should be extracted. This framework allows importing metrics, findings and textual information to existing artefacts or artefacts that will be created by the Data Provider. Refer to the [full ExcelMetrics Reference](#) for more information.

After you choose the framework to extend, you should follow these steps to make your custom Data Provider known to Squire:

1. Create a new configuration *tools* folder to save your work in your custom configuration folder: *MyConfiguration/configuration/tools*.
2. Create a new folder for your data provider inside the new *tools* folder: **CustomDP**. This folder needs to contain the following files:
 - **form.xml** defines the input parameters for the Data Provider, and the base framework to use, as described in [Defining Data Provider Parameters](#)
 - **form_en.properties** contains the strings displayed in the web interface for this Data Provider, as described in [Localising your Data Provider](#)
 - **config.tcl** contains the parameters for your custom Data Provider that are specific to the selected framework
 - **CustomDP.pl** is the perl script that is executed automatically if your custom Data Provider uses one of the *Perl frameworks.
3. Edit Squire Server's configuration file to register your new configuration path, as described in the Installation and Administration Guide.

4. Log into the web interface as a Squire administrator and reload the configuration.

Your new Data Provider is now known to Squire and can be triggered in analyses. Note that you may have to modify your Squire configuration to make your wizard aware of the new Data Provider and your model aware of the new metrics it provides. Refer to the relevant sections of the Configuration Guide for more information.

Csv Reference

```
=====  
= Csv =  
=====
```

The Csv framework is used to import metrics or textual information and attach them to artefacts of type Application, File or Function. While parsing one or more input CSV files, if it finds the same metric for the same artefact several times, it will only use the last occurrence of the metric and ignore the previous ones. Note that the type of artefacts you can attach metrics to is limited to Application, File and Function artefacts. If you are working with File artefacts, you can let the Data Provider create the artefacts by itself if they do not exist already.

```
=====  
= form.xml =  
=====
```

You can customise form.xml to either:

- specify the path to a single CSV file to import
- specify a pattern to import all csv files matching this pattern in a directory

In order to import a single CSV file:

```
=====  
<?xml version="1.0" encoding="UTF-8"?>  
<tags baseName="Csv" needSources="true">  
  <tag type="text" key="csv" defaultValue="/path/to/mydata.csv" />  
</tags>
```

Notes:

- The csv key is mandatory.
- Since Csv-based data providers commonly rely on artefacts created by Squire Sources, you can set the needSources attribute to force users to specify at least one repository connector when creating a project.

In order to import all files matching a pattern in a folder:

```
=====  
<?xml version="1.0" encoding="UTF-8"?>  
<tags baseName="Csv" needSources="true">  
  <!-- Root directory containing Csv files to import-->  
  <tag type="text" key="dir" defaultValue="/path/to/mydata" />  
  <!-- Pattern that needs to be matched by a file name in order to import it-->  
  <tag type="text" key="ext" defaultValue="*.csv" />
```

```
<!-- search for files in sub-folders -->
<tag type="booleanChoice" defaultValue="true" key="sub" />
</tags>
```

Notes:

- The dir and ext keys are mandatory
- The sub key is optional (and its value set to false if not specified)

```
=====
= config.tcl =
=====
```

Sample config.tcl file:

```
=====
```

```
# The separator used in the input CSV file
# Usually \t or ;
set Separator "\t"
```

```
# The delimiter used in the input CSV file
# This is normally left empty, except when you know that some of the values in the CSV
file
# contain the separator itself, for example:
# "A text containing ; the separator";no problem;end
# In this case, you need to set the delimiter to \" in order for the data provider to
find 3 values instead of 4.
# To include the delimiter itself in a value, you need to escape it by duplicating it,
for example:
# "A text containing \" the delimiter";no problemo;end
# Default: none
set Delimiter \"
```

```
# ArtefactLevel is one of:
#     Application: to import data at application level
#     File: to import data at file level. In this case ArtefactKey has to be set
#           to the value of the header (key) of the column containing the file path
#           in the input CSV file.
#     Function : to import data at function level, in this case:
#           ArtefactKey has to be set to the value of the header (key) of the
column containing the path of the file
#           FunctionKey has to be set to the value of the header (key) of the
column containing the name and signature of the function
# Note that the values are case-sensitive.
set ArtefactLevel File
set ArtefactKey File
```

```
# Should the File paths be case-insensitive?
# true or false (default)
# This is used when searching for a matching artefact in already-existing artefacts.
set PathsAreCaseInsensitive "false"
```

```

# Should file artefacts declared in the input CSV file be created automatically?
# true (default) or false
set CreateMissingFile "true"

# FileOrganisation defines the layout of the input CSV file and is one of:
#   header::column: values are referenced from the column header
#   header::line: NOT AVAILABLE
#   alternate::line: lines are a sequence of {Key Value}
#   alternate::column: columns are a sequence of {Key Value}
# There are more examples of possible CSV layouts later in this document
set FileOrganisation header::column

# Metric2Key contains a case-sensitive list of paired metric IDs:
#   {MeasureID KeyName [Format]}
# where:
#   - MeasureID is the id of the measure as defined in your analysis model
#   - KeyName, depending on the FileOrganisation, is either the name of the column or
#     the name
#     in the cell preceding the value to import as found in the input CSV file
#   - Format is the optional format of the data, the only accepted format
#     is "text" to attach textual information to an artefact, for normal metrics omit
#     this field
set Metric2Key {
  {BRANCHES Branchs}
  {VERSIONS Versions}
  {CREATED Created}
  {IDENTICAL Identical}
  {ADDED Added}
  {REMOV Removed}
  {MODIF Modified}
  {COMMENT Comment text}
}

```

```

=====
= Sample CSV Input Files =
=====

```

Example 1:

```
=====
```

```

FileOrganisation : header::column
ArtefactLevel   : File
ArtefactKey     : Path

```

```

Path   Branchs Versions
./foo.c 15      105
./bar.c 12      58

```

Example 2:

```
=====
```

```

FileOrganisation : alternate::line

```

```
ArtefactLevel : File
ArtefactKey   : Path
```

```
Path  ./foo.c Branchs 15 Versions 105
Path  ./bar.c Branchs 12 Versions 58
```

Example 3:

```
=====
```

```
FileOrganisation : header::column
ArtefactLevel    : Application
```

```
ChangeRequest  Corrected  Open
27              15         11
```

Example 4:

```
=====
```

```
FileOrganisation : alternate::column
ArtefactLevel    : Application
```

```
ChangeRequest  15
Corrected      11
```

Example 5:

```
=====
```

```
FileOrganisation : alternate::column
ArtefactLevel    : File
ArtefactKey      : Path
```

```
Path  ./foo.c
Branchs 15
Versions 105
Path  ./bar.c
Branchs 12
Versions 58
```

Example 6:

```
=====
```

```
FileOrganisation : header::column
ArtefactLevel    : Function
ArtefactKey      : Path
FunctionKey      : Name
```

```
Path  Name      Decisions Tested
./foo.c end_game(int*,int*) 15    3
./bar.c bar(char) 12      6
```

Working With Paths:

```
=====
```

- Path separators are unified: you do not need to worry about handling differences between Windows and Linux

- With the option `PathsAreCaseInsensitive`, case is ignored when searching for files in the Squire internal data
- Paths known by Squire are relative paths starting at the root of what was specified in the repository connector during the analysis. This relative path is the one used to match with a path in a csv file.

Here is a valid example of file matching:

1. You provide `C:\A\B\C\D` as the root folder in a repository connector
2. `C:\A\B\C\D` contains `E\e.c` then Squire will know `E/e.c` as a file
3. You provide a csv file produced on linux and containing `/tmp/X/Y/E/e.c` as path, then Squire will be able to match it with the known file.

Squire uses the longest possible match.

In case of conflict, no file is found and a message is sent to the log.

csv_findings Reference

```
=====
= csv_findings =
=====
```

The `csv_findings` data provider is used to import findings (rule violations) and attach them to artefacts of type `Application`, `File` or `Function`.

The format of the csv file given as parameter has to be:

```
FILE;FUNCTION;RULE_ID;MESSAGE;LINE;COL;STATUS;STATUS_MESSAGE;TOOL
```

where:

```
=====
```

`FILE` : is the full path of the file where the finding is located

`FUNCTION` : is the name of the function where the finding is located

`RULE_ID` : is the Squire ID of the rule which is violated

`MESSAGE` : is the specific message of the violation

`LINE`: is the line number where the violation occurs

`COL`: (optional, leave empty if not provided) is the column number where the violation occurs

`STATUS`: (optional, leave empty if not provided) is the status of the relaxation if the violation has to be relaxed (`DEROGATION`, `FALSE_POSITIVE`, `LEGACY`)

`STATUS_MSG`: (optional, leave empty if not provided) is the message for the relaxation when relaxed

`TOOL`: is the tool providing the violation

The header line is read and ignored (it has to be there)

The separator (semicolon by default) can be changed in the `config.tcl` file (see below)

The delimiter (no delimiter by default) can be changed in the `config.tcl` (see below)

```
=====
```

```

= config.tcl =
=====

Sample config.tcl file:
=====
# The separator used in the input CSV file
# Usually ; or \t
set Separator \;

# The delimiter used in the CSV input file
# This is normally left empty, except when you know that some of the values in the CSV
file
# contain the separator itself, for example:
# "A text containing ; the separator";no problem;end
# In this case, you need to set the delimiter to \" in order for the data provider to
find 3 values instead of 4.
# To include the delimiter itself in a value, you need to escape it by duplicating it,
for example:
# "A text containing "" the delimiter";no problemo;end
# Default: none
set Delimiter \"

# You can add some patterns to avoid new findings when some strings in the finding
message changes
# i.e. Unreachable code Default switch clause is unreachable. switch-expression at
line 608 (column 12).
# In this case we do not want the line number to be part of the signagture of the
finding,
# to achieve this user will add a pattern as shown below (patterns are TCL regex
patterns):
lappend InconstantFindingsPatterns {at line [0-9]+}

```

CsvPerl Reference

```

=====
= CsvPerl =
=====

```

The CsvPerl framework offers the same functionality as Csv, but instead of dealing with the raw input files directly, it allows you to run a perl script to modify them and produce a CSV file with the expected input format for the Csv framework.

```

=====
= form.xml =
=====

```

In your form.xml, specify the input parameters you need for your Data Provider.

Our example will use two parameters: a path to a CSV file and another text parameter:

```
<?xml version="1.0" encoding="UTF-8"?>
<tags baseName="CsvPerl" needSources="true">
  <tag type="text" key="csv" defaultValue="/path/to/csv" />
  <tag type="text" key="param" defaultValue="MyValue" />
</tags>
```

- Since Csv-based data providers commonly rely on artefacts created by Squan Sources, you can set the needSources attribute to force users to specify at least one repository connector when creating a project.

```
=====
= config.tcl =
=====
```

Refer to the description of config.tcl for the Csv framework.

For CsvPerl one more option is possible:

```
# The variable NeedSources is used to request the perl script to be executed once for
each
# repository node of the project. In that case an additional parameter is sent to the
# perl script (see below for its position)
#set ::NeedSources 1
```

```
=====
= Sample CSV Input Files =
=====
```

Refer to the examples for the Csv framework.

```
=====
= Perl Script =
=====
```

The perl script will receive as arguments:

- all parameters defined in form.xml (as `-${key} $value`)
- the input directory to process (only if `::NeedSources` is set to 1 in the config.tcl file)
- the location of the output directory where temporary files can be generated
- the full path of the csv file to be generated

For the form.xml we created earlier in this document, the command line will be:
perl <configuration_folder>/tools/CustomDP/CustomDP.pl -csv /path/to/csv -param MyValue <output_folder> <output_folder>/CustomDP.csv

Example of perl script:

```

=====
#!/usr/bin/perl
use strict;
use warnings;
$|=1 ;

($csvKey, $csvValue, $paramKey, $paramValue, $output_folder, $output_csv) = @ARGV;

    # Parse input CSV file
    # ...

    # Write results to CSV
    open(CSVFILE, ">" . ${output_csv}) || die "perl: can not write: $!\n";
    binmode(CSVFILE, ":utf8");
    print CSVFILE "ChangeRequest;15";
    close CSVFILE;

exit 0;

```

Generic Reference

```

=====
= Generic =
=====

```

The Generic framework is the most flexible Data Provider framework, since it allows attaching metrics, findings, textual information and links to artefacts. If the artefacts do not exist in your project, they will be created automatically. It takes one or more CSV files as input (one per type of information you want to import) and works with any type of artefact.

```

=====
= form.xml =
=====

```

In form.xml, allow users to specify the path to a CSV file for each type of data you want to import.

You can set needSources to true or false, depending on whether or not you want to require the use of a repository connector when your custom Data Provider is used.

Example of form.xml file:

```

=====
<?xml version="1.0" encoding="UTF-8"?>
<tags baseName="Generic" needSources="false">
    <!-- Path to CSV file containing Metrics data -->
    <tag type="text" key="csv" defaultValue="mydata.csv" />
    <!-- Path to CSV file containing Findings data: -->

```

```

<tag type="text" key="fdg" defaultValue="mydata_fdg.csv" />
<!-- Path to CSV file containing Information data: -->
<tag type="text" key="inf" defaultValue="mydata_inf.csv" />
<!-- Path to CSV file containing Links data: -->
<tag type="text" key="lnk" defaultValue="mydata_lnk.csv" />
</tags>

```

Note: All tags are optional. You only need to specify the tag element for the type of data you want to import with your custom Data Provider.

```

=====
= config.tcl =
=====

```

Sample config.tcl file:

```

=====
# The separator used in the input csv files
# Usually \t or ; or ,
# In our example below, a space is used.
set Separator " "

# The delimiter used in the input CSV file
# This is normally left empty, except when you know that some of the values in the CSV
file
# contain the separator itself, for example:
# "A text containing ; the separator";no problem;end
# In this case, you need to set the delimiter to \" in order for the data provider to
find 3 values instead of 4.
# To include the delimiter itself in a value, you need to escape it by duplicating it,
for example:
# "A text containing "" the delimiter";no problemo;end
# Default: none
set Delimiter \"

# The path separator in an artefact's path
# in the input CSV file.
# Note that artefact is spellt with an "i"
# and not an "e" in this option.
set ArtifactPathSeparator "/"

# If the data provider needs to specify a different toolName (optional)
set SpecifyToolName 1

# Metric2Key contains a case-sensitive list of paired metric IDs:
#   {MeasureID KeyName [Format]}
# where:
#   - MeasureID is the id of the measure as defined in your analysis model
#   - KeyName is the name in the cell preceding the value to import as found in the
input CSV file
#   - Format is the optional format of the data, the only accepted format

```

```

#      is "text" to attach textual information to an artefact. Note that the same
result can also
#      be achieved with Info2Key (see below). For normal metrics omit this field.
set Metric2Key {
    {CHANGES Changed}
}

# Finding2Key contains a case-sensitive list of paired rule IDs:
#      {FindingID KeyName}
# where:
# - FindingID is the id of the rule as defined in your analysis model
# - KeyName is the name in the finding name in the input CSV file
set Finding2Key {
    {R_NOTLINKED NotLinked}
}

# Info2Key contains a case-sensitive list of paired info IDs:
#      {InfoID KeyName}
# where:
# - InfoID is the id of the textual information as defined in your analysis model
# - KeyName is the name of the information name in the input CSV file
set Info2Key
    {SPECIAL_LABEL Label}
}

# Ignore findings for artefacts that are not part of the project (orphan findings)
# When set to 1, the findings are ignored
# When set to 0, the findings are imported and attached to the APPLICATION node
# (default: 1)
set IgnoreIfArtefactNotFound 1

# If data in csv concerns source code artefacts (File, Class or Function), the way to
# match file paths can be case-insensitive
# true or false (default)
# This is used when searching for a matching artefact in already-existing artefacts.
set PathsAreCaseInsensitive "false"

# For findings of a type that is not in your ruleset, set a default rule ID.
# The value for this parameter must be a valid rule ID from your analysis model.
# (default: empty)
set UnknownRuleId UNKNOWN_RULE

# Save the total count of orphan findings as a metric at application level
# Specify the ID of the metric to use in your analysis model
# to store the information
# (default: empty)
set OrphanArteCountId NB_ORPHANS

# Save the total count of unknown rules as a metric at application level
# Specify the ID of the metric to use in your analysis model
# to store the information

```

```
# (default: empty)
set OrphanRulesCountId NB_UNKNOWN_RULES

# Save the list of unknown rule IDs as textual information at application level
# Specify the ID of the metric to use in your analysis model
# to store the information
# (default: empty)
set OrphanRulesListId UNKNOWN_RULES_INFO
```

```
=====
= CSV File Format =
=====
```

All the examples listed below assume the use of the following config.tcl:

```
set Separator ","
set ArtifactPathSeparator "/"
set Metric2Key {
    {CHANGES Changed}
}
set Finding2Key {
    {R_NOTLINKED NotLinked}
}
set Info2Key
    {SPECIAL_LABEL Label}
}
```

How to reference an artefact:

```
=====
==> artefact_type artefact_path
Example:
REQ_MODULES,Requirements
REQ_MODULE,Requirements/Module
REQUIREMENT,Requirements/Module/My_Req
```

References the following artefact

```
Application
    Requirements (type: REQ_MODULES)
        Module (type: REQ_MODULE)
            My_Req (type: REQUIREMENT)
```

Note: For source code artefacts there are 3 special artefact kinds:

```
==> FILE file_path
==> CLASS file_path (Name|Line)
==> FUNCTION file_path (Name|Line)
```

Examples:

```
FUNCTION src/file.c 23
references the function which contains line 23 in the source file src/file.c, if no
function found the line whole line of the csv file is ignored.
```

FUNCTION src/file.c foo()
references a function named foo in source file src/file.c. If more than one function foo is defined in this file, then the signature of the function (which is optional) is used to find the best match.

Layout for Metrics File:

```
=====  
=> artefact_type artefact_path (Key Value)*
```

When the parent artefact type is not given it defaults to <artefact_type>_FOLDER.

Example:

```
REQ_MODULE,Requirements/Module  
REQUIREMENT,Requirements/Module/My_Req,Changed,1
```

will produce the following artefact tree:

```
Application  
  Requirements (type: REQ_MODULE_FOLDER)  
    Module (type: REQ_MODULE)  
      My_Req : (type: REQUIREMENT) with 1 metric CHANGES = 1
```

Note: the key "Changed" is mapped to the metric "CHANGES", as specified by the Metric2Key parameter, so that it matches what is expected by the model.

Layout for Findings File:

```
=====  
=> artefact_type artefact_path key message
```

When the parent artefact type is not given it defaults to <artefact_type>_FOLDER.

Example:

```
REQ_MODULE,Requirements/Module  
REQUIREMENT,Requirements/Module/My_Req,NotLinked,A Requirement should always been  
Linked
```

will produce the following artefact tree:

```
Application  
  Requirements (type: REQ_MODULE_FOLDER)  
    Module (type: REQ_MODULE)  
      My_Req (type: REQUIREMENT) with 1 finding R_NOTLINKED whose description  
is "A Requirement should always been linked"
```

Note: the key "NotLinked" is mapped to the finding "R_NOTLINKED", as specified by the Finding2Key parameter, so that it matches what is expected by the model.

Layout for Textual Information File:

```
=====  
=> artefact_type artefact_path label value
```


When the parent artefact type is not given it defaults to <artefact_type>_FOLDER.

Example:

```
REQ_MODULE,Requirements/Module
```

```
REQUIREMENT,Requirements/Module/My_Req,Label,This is the label of the req
```

will produce the following artefact tree:

Application

 Requirements (type: REQ_MODULE_FOLDER)

 Module (type: REQ_MODULE)

 My_Req (type: REQUIREMENT) with 1 information of type SPECIAL_LABEL

whose content is "This is the label of the req"

Note: the label "Label" is mapped to the finding "SPECIAL_LABEL", as specified by the Info2Key parameter, so that it matches what is expected by the model.

Layout for Links File:

=====

```
==> artefact_type artefact_path dest_artefact_type dest_artefact_path link_type
```

When the parent artefact type is not given it defaults to <artefact_type>_FOLDER

Example:

```
REQ_MODULE Requirements/Module
```

```
TEST_MODULE Tests/Module
```

```
REQUIREMENT Requirements/Module/My_Req TEST Tests/Module/My_test TESTED_BY
```

will produce the following artefact tree:

Application

 Requirements (type: REQ_MODULE_FOLDER)

 Module (type: REQ_MODULE)

 My_Req (type: REQUIREMENT) ----->

 Tests (type: TEST_MODULE_FOLDER) |

 Module (type: TEST_MODULE) |

 My_Test (type: TEST) <-----+ link (type: TESTED_BY)

The TESTED_BY relationship is created with My_Req as source of the link and My_test as the destination

CSV file organisation when SpecifyToolName is set to 1

=====

When the variable SpecifyToolName is set to 1 (or true) a column has to be added at the beginning of each line in each csv file. This column can be empty or filled with a different toolName.

Example:

```
,REQ_MODULE,Requirements/Module
```

```
MyReqChecker,REQUIREMENT,Requirements/Module/My_Req Label,This is the label of the req
```

The finding of type Label will be set as reported by the tool "MyReqChecker".

GenericPerl Reference

```
=====  
= GenericPerl =  
=====
```

The GenericPerl framework is an extension of the Generic framework that starts by running a perl script in order to generate the metrics, findings, information and links files. It is useful if you have an input file whose format needs to be converted to match the one expected by the Generic framework, or if you need to retrieve and modify information exported from a web service on your network.

```
=====  
= form.xml =  
=====
```

In your form.xml, specify the input parameters you need for your Data Provider. Our example will use two parameters: a path to a CSV file and another text parameter:

```
<?xml version="1.0" encoding="UTF-8"?>  
<tags baseName="CsvPerl" needSources="false">  
  <tag type="text" key="csv" defaultValue="/path/to/csv" />  
  <tag type="text" key="param" defaultValue="MyValue" />  
</tags>
```

```
=====  
= config.tcl =  
=====
```

Refer to the description of config.tcl for the Generic framework for the basic options.

Additionally, the following options are available for the GenericPerl framework, in order to know which type of information your custom Data Provider should try to import.

```
# If the data provider needs to specify a different toolName (optional)  
#set SpecifyToolName 1
```

```
# Set to 1 to import metrics csv file, 0 otherwise
```

```
# ImportMetrics  
# When set to 1, your custom Data Provider (CustomDP) will try to import  
# metrics from a file called CustomDP.mtr.csv that your perl script  
# should generate according to the expected format described in the  
# documentation of the Generic framework.  
set ImportMetrics 1
```

```
# ImportInfos
# When set to 1, your custom Data Provider (CustomDP) will try to import
# textual information from a file called CustomDP.inf.csv that your perl script
# should generate according to the expected format described in the
# documentation of the Generic framework.
set ImportInfos 0

# ImportFindings
# When set to 1, your custom Data Provider (CustomDP) will try to import
# findings from a file called CustomDP.fdg.csv that your perl script
# should generate according to the expected format described in the
# documentation of the Generic framework.
set ImportFindings 1

# ImportLinks
# When set to 1, your custom Data Provider (CustomDP) will try to import
# artefact links from a file called CustomDP.lnk.csv that your perl script
# should generate according to the expected format described in the
# documentation of the Generic framework.
set ImportLinks 0

# Ignore findings for artefacts that are not part of the project (orphan findings)
# When set to 1, the findings are ignored
# When set to 0, the findings are imported and attached to the APPLICATION node
# (default: 1)
set IgnoreIfArtefactNotFound 1

# For findings of a type that is not in your ruleset, set a default rule ID.
# The value for this parameter must be a valid rule ID from your analysis model.
# (default: empty)
set UnknownRuleId UNKNOWN_RULE

# Save the total count of orphan findings as a metric at application level
# Specify the ID of the metric to use in your analysis model
# to store the information
# (default: empty)
set OrphanArteCountId NB_ORPHANS

# Save the total count of unknown rules as a metric at application level
# Specify the ID of the metric to use in your analysis model
# to store the information
# (default: empty)
set OrphanRulesCountId NB_UNKNOWN_RULES

# Save the list of unknown rule IDs as textual information at application level
# Specify the ID of the metric to use in your analysis model
# to store the information
# (default: empty)
set OrphanRulesListId UNKNOWN_RULES_INFO
```

```
=====
= CSV File Format =
=====
```

Refer to the examples in the Generic framework.

```
=====
= Perl Script =
=====
```

The perl script will receive as arguments:

- all parameters defined in form.xml (as `-${key} $value`)
- the location of the output directory where temporary files can be generated
- the full path of the metric csv file to be generated (if `ImportMetrics` is set to 1 in `config.tcl`)
- the full path of the findings csv file to be generated (if `ImportFindings` is set to 1 in `config.tcl`)
- the full path of the textual information csv file to be generated (if `ImportInfos` is set to 1 in `config.tcl`)
- the fullpath of the links csv file to be generated (if `ImportLinks` is set to 1 in `config.tcl`)
- the full path to the output directory used by this data provider in the previous analysis

For the `form.xml` and `config.tcl` we created earlier in this document, the command line will be:

```
perl <configuration_folder>/tools/CustomDP/CustomDP.pl -csv /path/to/csv -param
MyValue <output_folder> <output_folder>/CustomDP.mtr.csv
<output_folder>/CustomDP.fdg.csv <previous_output_folder>
```

The following perl functions are made available in the perl environment so you can use them in your script:

- `get_tag_value(key)` (returns the value for `$key` parameter from your `form.xml`)
- `get_output_metric()`
- `get_output_finding()`
- `get_output_info()`
- `get_output_link()`
- `get_output_dir()`
- `get_input_dir()` (returns the folder containing sources if `needSources` is set to 1)
- `get_previous_dir()`

Example of perl script:

```
=====
#!/usr/bin/perl
use strict;
use warnings;
$|=1 ;

# Parse input CSV file
```

```

my $csvFile = get_tag_value("csv");
my $param = get_tag_value("param");
# ...

# Write metrics to CSV
open(METRICS_FILE, ">" . get_output_metric()) || die "perl: can not write: $!\n";
binmode(METRICS_FILE, ":utf8");
print METRICS_FILE "REQUIREMENTS;Requirements/All_Requirements;NB_REQ;15";
close METRICS_FILE;

# Write findings to CSV
open(FINDINGS_FILE, ">" . get_output_findings()) || die "perl: can not write:
$!\n";
binmode(FINDINGS_FILE, ":utf8");
print FINDINGS_FILE "REQUIREMENTS;Requirements/All_Requirements;R_LOW_REQS;\nThe
minimum number of requirement should be at least 25.\n";
close FINDINGS_FILE;

exit 0;

```

FindingsPerl Reference

```

=====
= FindingsPerl =
=====

```

The FindingsPerl framework is used to import findings and attach them to existing artefacts. Optionally, if an artefact cannot be found in your project, the finding can be attached to the root node of the project instead. When launching a Data Provider based on the FindingsPerl framework, a perl script is run first. This perl script is used to generate a CSV file with the expected format which will then be parsed by the framework.

```

=====
= form.xml =
=====

```

In your form.xml, specify the input parameters you need for your Data Provider. Our example will use two parameters: a path to a CSV file and another text parameter:

```

<?xml version="1.0" encoding="UTF-8"?>
<tags baseName="CsvPerl" needSources="true">
  <tag type="text" key="csv" defaultValue="/path/to/csv" />
  <tag type="text" key="param" defaultValue="MyValue" />
</tags>

```

- Since FindingsPerl-based data providers commonly rely on artefacts created by Squan

Sources, you can set the needSources attribute to force users to specify at least one repository connector when creating a project.

```
=====
= config.tcl =
=====
```

Sample config.tcl file:

```
=====
```

```
# The separator to be used in the generated CSV file
# Usually \t or ;
set Separator ";"
```

```
# The delimiter used in the input CSV file
# This is normally left empty, except when you know that some of the values in the CSV
file
# contain the separator itself, for example:
# "A text containing ; the separator";no problem;end
# In this case, you need to set the delimiter to \" in order for the data provider to
find 3 values instead of 4.
# To include the delimiter itself in a value, you need to escape it by duplicating it,
for example:
# "A text containing \" the delimiter";no problemo;end
# Default: none
set Delimiter \"
```

```
# Should the perl script executed once for each repository node of the project ?
# 1 or 0 (default)
# If true an additional parameter is sent to the
# perl script (see below for its position)
set ::NeedSources 0
```

```
# Should the violated rules definitions be generated?
# true or false (default)
# This creates a ruleset file with rules that are not already
# part of your analysis model so you can review it and add
# the rules manually if needed.
set generateRulesDefinitions false
```

```
# Should the File paths be case-insensitive?
# true or false (default)
# This is used when searching for a matching artefact in already-existing artefacts.
set PathsAreCaseInsensitive false
```

```
# Should file artefacts declared in the input CSV file be created automatically?
# true (default) or false
set CreateMissingFile true
```

```
# Ignore findings for artefacts that are not part of the project (orphan findings)
```

```

# When set to 0, the findings are imported and attached to the APPLICATION node
instead of the real artefact
# When set to 1, the findings are not imported at all
# (default: 0)
set IgnoreIfArtefactNotFound 0

# For findings of a type that is not in your ruleset, set a default rule ID.
# The value for this parameter must be a valid rule ID from your analysis model.
# (default: empty)
set UnknownRuleId UNKNOWN_RULE

# Save the total count of orphan findings as a metric at application level
# Specify the ID of the metric to use in your analysis model
# to store the information
# (default: empty)
set OrphanArteCountId NB_ORPHANS

# Save the total count of unknown rules as a metric at application level
# Specify the ID of the metric to use in your analysis model
# to store the information
# (default: empty)
set OrphanRulesCountId NB_UNKNOWN_RULES

# Save the list of unknown rule IDs as textual information at application level
# Specify the ID of the metric to use in your analysis model
# to store the information
# (default: empty)
set OrphanRulesListId UNKNOWN_RULES_INFO

# The tool version to specify in the generated rules definitions
# The default value is ""
# Note that the toolName is the name of the folder you created
# for your custom Data Provider
set ToolVersion ""

# FileOrganisation defines the layout of the CSV file that is produced by your perl
script:
#   header::column: values are referenced from the column header
#   header::line: NOT AVAILABLE
#   alternate::line: NOT AVAILABLE
#   alternate::column: NOT AVAILABLE
set FileOrganisation header::column

# In order to attach a finding to an artefact of type FILE:
# - Tool (optional) if present it overrides the name of the tool providing the
finding
# - Path has to be the path of the file
# - Type has to be set to FILE
# - Line can be either empty or the line in the file where the finding is located
# Rule is the rule identifier, can be used as is or translated using Rule2Key
# Descr is the description message, which can be empty

```

```

#
# In order to attach a finding to an artefact of type FUNCTION:
# - Tool (optional) if present it overrides the name of the tool providing the
finding
# - Path has to be the path of the file containing the function
# - Type has to be FUNCTION
# - If line is an integer, the system will try to find an artefact function
#   at the given line of the file
# - If no Line or Line is not an integer, Name is used to find an artefact in
#   the given file having name and signature as found in this column.
# (Line and Name are optional columns)

# Rule2Key contains a case-sensitive list of paired rule IDs:
#   {RuleID KeyName}
# where:
# - RuleID is the id of the rule as defined in your analysis model
# - KeyName is the rule ID as written by your perl script in the produced CSV file
# Note: Rules that are not mapped keep their original name. The list of unmapped rules
is in the log file generated by your Data Provider.
set Rule2Key {
    { ExtractedRuleID_1 MappedRuleId_1 }
    { ExtractedRuleID_2 MappedRuleId_2 }
}

```

```

=====
= CSV File Format =
=====

```

According to the options defined earlier in config.tcl, a valid csv file would be:

```

Path;Type;Line;Name;Rule;Descr
/src/project/module1/f1.c;FILE;12;;R1;Rule R1 is violated because variable v1
/src/project/module1/f1.c;FUNCTION;202;;R4;Rule R4 is violated because function f1
/src/project/module2/f2.c;FUNCTION;42;;R1;Rule R1 is violated because variable v2
/src/project/module2/f2.c;FUNCTION;;skip_line(int);R1;Rule R1 is violated because
variable v2

```

Working With Paths:
=====

- Path separators are unified: you do not need to worry about handling differences between Windows and Linux
- With the option PathsAreCaseInsensitive, case is ignored when searching for files in the Squire internal data
- Paths known by Squire are relative paths starting at the root of what was specified in the repository connector during the analysis. This relative path is the one used to match with a path in a csv file.

Here is a valid example of file matching:

1. You provide C:\A\B\C\D as the root folder in a repository connector

2. C:\A\B\C\D contains E\e.c then Squore will know E/e.c as a file

3. You provide a csv file produced on linux and containing /tmp/X/Y/E/e.c as path, then Squore will be able to match it with the known file.

Squore uses the longest possible match.

In case of conflict, no file is found and a message is sent to the log.

```
=====  
= Perl Script =  
=====
```

The perl script will receive as arguments:

- all parameters defined in form.xml (as `-${key} $value`)
- the input directory to process (only if `::NeedSources` is set to 1)
- the location of the output directory where temporary files can be generated
- the full path of the findings csv file to be generated

For the form.xml and config.tcl we created earlier in this document, the command line will be:

```
perl <configuration_folder>/tools/CustomDP/CustomDP.pl -csv /path/to/csv -param  
MyValue <output_folder> <output_folder>/CustomDP.fdg.csv  
<output_folder>/CustomDP.fdg.csv
```

Example of perl script:

```
=====
```

```
#!/usr/bin/perl  
use strict;  
use warnings;  
$|=1 ;
```

```
($csvKey, $csvValue, $paramKey, $paramValue, $output_folder, $output_csv) = @ARGV;
```

```
    # Parse input CSV file  
    # ...
```

```
    # Write results to CSV  
    open(CSVFILE, ">" . ${output_csv}) || die "perl: can not write: $!\n";  
    binmode(CSVFILE, ":utf8");  
    print CSVFILE "Path;Type;Line;Name;Rule;Descr";  
    print CSVFILE "/src/project/module1/f1.c;FILE;12;;;R1;Rule R1 is violated because  
variable v1";  
    close CSVFILE;
```

```
exit 0;
```

ExcelMetrics Reference

```
=====
= ExcelMetrics =
=====
```

The ExcelMetrics framework is used to extract information from one or more Microsoft Excel files (.xls or .xlsx). A detailed configuration file allows defining how the Excel document should be read and what information should be extracted. This framework allows importing metrics, findings and textual information to existing artefacts or artefacts that will be created by the Data Provider.

```
=====
= form.xml =
=====
```

You can customise form.xml to either:

- specify the path to a single Excel file to import
- specify a pattern to import all Excel files matching this pattern in a directory

In order to import a single Excel file:

```
=====
<?xml version="1.0" encoding="UTF-8"?>
<tags baseName="ExcelMetrics" needSources="false">
  <tag type="text" key="excel" defaultValue="/path/to/mydata.xlsx" />
</tags>
```

Notes:

- The excel key is mandatory.

In order to import all files matching a patter in a folder:

```
=====
<?xml version="1.0" encoding="UTF-8"?>
<tags baseName="ExcelMetrics" needSources="false">
  <!-- Root directory containing Excel files to import-->
  <tag type="text" key="dir" defaultValue="/path/to/mydata" />
  <!-- Pattern that needs to be matched by a file name in order to import it-->
  <tag type="text" key="ext" defaultValue="*.xlsx" />
  <!-- search for files in sub-folders -->
  <tag type="booleanChoice" defaultValue="true" key="sub" />
</tags>
```

Notes:

- The dir and ext keys are mandatory
- The sub key is optional (and its value set to false if not specified)

```
=====
= config.tcl =
=====
```

Sample config.tcl file:

=====

```
# The separator to be used in the generated csv file
# Usually \t or ; or ,
set Separator ";"
```

```
# The delimiter used in the input CSV file
# This is normally left empty, except when you know that some of the values in the CSV
file
# contain the separator itself, for example:
# "A text containing ; the separator";no problem;end
# In this case, you need to set the delimiter to \" in order for the data provider to
find 3 values instead of 4.
# To include the delimiter itself in a value, you need to escape it by duplicating it,
for example:
# "A text containing \" the delimiter";no problemo;end
# Default: none
set Delimiter \"
```

```
# The path separator in an artefact's path
# in the generated CSV file.
set ArtefactPathSeparator "/"
```

```
# Ignore findings for artefacts that are not part of the project (orphan findings)
# When set to 1, the findings are ignored
# When set to 0, the findings are imported and attached to the APPLICATION node
# (default: 1)
set IgnoreIfArtefactNotFound 1
```

```
# For findings of a type that is not in your ruleset, set a default rule ID.
# The value for this parameter must be a valid rule ID from your analysis model.
# (default: empty)
set UnknownRuleId UNKNOWN_RULE
```

```
# Save the total count of orphan findings as a metric at application level
# Specify the ID of the metric to use in your analysis model
# to store the information
# (default: empty)
set OrphanArteCountId NB_ORPHANS
```

```
# Save the total count of unknown rules as a metric at application level
# Specify the ID of the metric to use in your analysis model
# to store the information
# (default: empty)
set OrphanRulesCountId NB_UNKNOWN_RULES
```

```
# Save the list of unknown rule IDs as textual information at application level
# Specify the ID of the metric to use in your analysis model
# to store the information
# (default: empty)
set OrphanRulesListId UNKNOWN_RULES_INFO
```

```

# The list of the Excel sheets to read, each sheet has the number of the first line to
read
# A Perl regexp pattern can be used instead of the name of the sheet (the first sheet
matching
# the pattern will be considered)
set Sheets {{Baselines 5} {ChangeNotes 5}}

# #####
# # COMMON DEFINITIONS #
# #####
#
# - <value> is a list of column specifications whose values will be concatenated. When
no column name is present, the
#     text is taken as it appears. Optional sheet name can be added (with ! char
to separate from the column name)
#     Examples:
#     - {C:} the value will be the value in column C on the current row
#     - {C: B:} the value will be the concatenation of values found in column C
and B of the current row
#     - {Deliveries} the value will be Deliveries
#     - {BJ: " - " BL:} the value will be the concatenation of value found in
column BJ,
#         string " - " and the value found in column BL fo the current row
#     - {OtherSheet!C:} the value will be the value in column C from the sheet
OtherSheet on the current row
#
# - <condition> is a list of conditions. An empty condition is always true. A
condition is a column name followed by colon,
#     optionally followed by a perl regexp. Optional sheet name can be added
(with ! char to separate from the column name)
#     Examples:
#     - {B:} the value in column B must be empty on the current row
#     - {B:.+} the value in column B can not be empty on the current row
#     - {B:R_.+} the value in column B is a word starting by R_ on the current row
#     - {A: B:.+ C:R_.+} the value in column A must be empty and the value in column
B must contain something and
#         the column C contains a word starting with R_ on the current row
#     - {OtherSheet!B:.+} the value in column B from sheet OtherSheet on the current
row can not be empty.

# #####
# # ARTEFACTS #
# #####
# The variable is a list of artefact hierarchy specification:
# {ArtefactHierarchySpec1 ArtefactHierarchySpec2 ... ArtefactHierarchySpecN}
# where each ArtefactHierarchySpecx is a list of ArtefactSpec
#
# An ArtefactSpec is a list of items, each item being:
# <<(sheetName!)?artefactType> <conditions> <name> <parentType>? <parentName?>}
# where:

```

```

# - <(sheetName!)?artefactType>: allows specifying the type. Optional sheetName can
be added (with ! char to separate from the type) to limit
#
#           the artefact search in one specific sheet. When
Sheets are given with regexp, the same regexp has to be used
#
#           for the sheetName.
#
#           If the type is followed by a question mark (?),
this level of artefact is optional.
#
#           If the type is followed by a plus char (+), this
level is repeatable on the next row
# - <condition>: see COMMON DEFINITIONS
# - <value>: the name of the artefact to build, see COMMON DEFINITIONS
#
# - <parentType>: This element is optional. When present, it means that the current
element will be attached to a parent having this type
# - <parentValue>: This is a list like <value> to build the name of the artefact of
type <parentType>. If such artefact is not found,
#
#           the current artefact does not match
#
# Note: to add metrics at application level, specify an APPLICATION artefact which
will match only one line:
#     e.g. {APPLICATION {A:.+} {}} will recognize as application the line having
column A not empty.
set ArtefactsSpecs {
  {
    {DELIVERY {} {Deliveries}}
    {RELEASE {E:.+} {E:}}
    {SPRINT {O:SW_Software} {Q:}}
  }
  {
    {DELIVERY {} {Deliveries}}
    {RELEASE {O:SY_System} {Q:}}
  }
  {
    {WP {BL:.+ AF:.+} {BJ: " - " BL:} SPRINT {AF:}}
    {ChangeNotes!TASK {D:(added|changed|unchanged) T:imes} {W: AD:}}
  }
  {
    {WP {} {{Unplanned imes}} SPRINT {AF:}}
    {TASK {BL: D:(added|changed|unchanged) T:imes W:.+} {W: AD:}}
  }
}

# #####
# # METRICS #
# #####
# Specification of metrics to be retrieved
# This is a list where each element is:
# {<artefactTypeList> <metricId> <condition> <value> <format>}
# Where:
# - <artefactTypeList>: the list of artefact types for which the metric has to be
used

```

```

#           each element of the list is (sheetName!)?artefactType where
sheetName is used
#           to restrict search to only one sheet. sheetName is optional.
#   - <metricId>: the name of the MeasureId to be injected into Square, as defined
in your analysis model
#   - <conftion>: see COMMON DEFINITIONS above. This is the condition for the
metric to be generated.
#   - <value> : see COMMON DEFINITIONS above. This is the value for the metric (can
be built from multi column)
#   - <format> : optional, defaults to NUMBER
#           Possible format are:
#           * DATE_FR, DATE_EN for date stored as string
#           * DATE for cell formatted as date
#           * NUMBER_FR, NUMBER_EN for number stored as string
#           * NUMBER for cell formatted as number
#           * LINES for counting the number of text lines in a cell
#   - <formatPattern> : optional
#           Only used by the LINES format.
#           This is a pattern (can contain perl regexp) used to filter lines to
count
set MetricsSpecs {
  {{RELEASE SPRINT}} TIMESTAMP {} {A:} DATE_EN}
  {{RELEASE SPRINT}} DATE_ACTUAL_RELEASE {} {S:} DATE_EN}
  {{RELEASE SPRINT}} DATE_FINISH {} {T:} DATE_EN}
  {{RELEASE SPRINT}} DELIVERY_STATUS {} {U:}}
  {{WP}} WP_STATUS {} {BO:}}
  {{ChangeNotes!TASK}} IS_UNPLAN {} {BL:}}
  {{TASK WP}} DATE_LABEL {} {BP:} DATE_EN}
  {{TASK WP}} DATE_INTEG_PLAN {} {BD:} DATE_EN}
  {{TASK}} TASK_STATUS {} {AE:}}
  {{TASK}} TASK_TYPE {} {AB:}}
}

# #####
# # FINDINGS #
# #####
# This is a list where each element is:
# {<artefactTypeList> <findingId> <condition> <value> <localisation>}
# Where:
#   - <artefactTypeList>: the list of artefact type for which the metric has to be
used
#           each element of the list is (sheetName!)?artefactType where
sheetName is used
#           to restrict search to only one sheet. sheetName is optional.
#   - <findingId>: the name of the FindingId to be injected into Square, as defined
in your analysis model
#   - <conftion>: see COMMON DEFINITIONS above. This is the condition for the
finding to be triggered.
#   - <value>: see COMMON DEFINITIONS above. This is the value for the message of
the finding (can be built from multi column)
#   - <localisation>: this a <value> representing the localisation of the finding

```

```

(free text)
set FindingsSpecs {
    {{WP}} {BAD_WP} {BL:..+ AF:..+} {{This WP is not in a correct state } AF:..+} {A:}}
}

# #####
# # TEXTUAL INFORMATION #
# #####
# This is a list where each element is:
# {<artefactTypeList> <infoId> <condition> <value>}
# Where:
# - <artefactTypeList> the list of artefact types for which the info has to be
used
#           each element of the list is (sheetName!)?artefactType where
sheetName is used
#           to restrict search to only one sheet. sheetName is optional.
# - <infoId> : is the name of the Information to be attached to the artefact, as
defined in your analysis model
# - <condition> : see COMMON DEFINITIONS above. This is the condition for the info
to be generated.
# - <value> : see COMMON DEFINITIONS above. This is the value for the info (can be
built from multi column)
set InfosSpecs {
    {{TASK}} ASSIGN_TO {} {XB:}}
}

# #####
# # LABEL TRANSFORMATION #
# #####
# This is a list value specification for MeasureId or InfoId:
# <MeasureId|InfoId> { {<LABEL1> <value1>} ... {<LABELn> <valuen>}}
# Where:
# - <MeasureId|InfoId> : is either a MeasureId, an InfoId, or * if it is available
for every measureid/infoid
# - <LABELx> : is the label to match (can contain perl regexp)
# - <valuex> : is the value to replace the label by, it has to match the correct
format for the metrics (no format for infoid)
#
# Note: only metrics which are labels in the excel file or information which need to
be rewritten, need to be described here.
set Label2ValueSpec {
    {
        STATUS {
            {OPENED 0}
            {ANALYZED 1}
            {CLOSED 2}
            {.* -1}
        }
    }
    {
        * {

```

```
{FATAL 0}  
{ERROR 1}  
{WARNING 2}  
{{LEVEL:\s*0} 1}  
{{LEVEL:\s*1} 2}  
{{LEVEL:\s*[2-9]+} 3}  
}  
}  
}
```

Note that a sample Excel file with its associated config.tcl is available in `$SQUARE_HOME/addons/tools/ExcelMetrics` in order to further explain available configuration options.

Appendix B: Squore XML Schemas

input-data-2.xsd

[Download input-data-2.xsd](#)

form.xsd

[Download form.xsd](#)

properties-1.2.xsd

[Download properties-1.2.xsd](#)

config-1.3.xsd

[Download config-1.3.xsd](#)

analysis.xsd

[Download analysis.xsd](#)

decision.xsd

[Download decision.xsd](#)

description.xsd

[Download description.xsd](#)

exports.xsd

[Download exports.xsd](#)

highlights.xsd

[Download highlights.xsd](#)

properties.xsd

[Download properties.xsd](#)

tutorials.xsd

[Download tutorials.xsd](#)

wizards.xsd

[Download wizards.xsd](#)

Appendix C: Licences

Software Licence Agreement

Squoring Software

End-User License and Support Agreement

Please read this document carefully. This is a legal agreement by which Squoring Technologies SAS ("Squoring") permits use of its Software products ("Squoring Software"). The user ("Customer") accepts the terms of this Agreement by taking any or all of the following actions: (a) by signing an order form or purchase order referencing either this Agreement or a Technical and Financial proposal issued by Squoring (an "Order Form"), (b) by opening the package containing the Software, and/or (c) by installing the Software on a computer ("Target Hardware").

CUSTOMER CONSENTS TO BE LEGALLY BOUND BY THESE TERMS. IF CUSTOMER DOES NOT AGREE TO ALL OF THE TERMS OF THIS AGREEMENT, CUSTOMER MUST NOT USE THE SOFTWARE AND MUST RETURN IT, INCLUDING ANY PRINTED ASSOCIATED DOCUMENTATION, TO SQUORING WITHIN FOURTEEN (14) DAYS TO RECEIVE A FULL REFUND OF THE PURCHASE PRICE.

1) DEFINITION

(a) "Squoring Software" includes (i) the Software identified in an Order Form or delivered with this Agreement; (ii) any authorized copies thereof; (iii) all related documentation ("Documentation") delivered with or included in that software; and (iv) any update to that software that Customer may receive from Squoring.

(b) Squoring Software is based on a traditional 3-tier architecture consisting of:

- . a database and a data folder for storing project and user management data
- . an application server running the "Squore Server Software" and the "License Server Software"
- . a client front-end accessible through a Web Browser and a Command Line Interface to interact with the application server from a client machine

(c) Target hardware ("Target Hardware") is uniquely identified by the hardware specification and the operating system running on it.

2) LICENSE

Squoring grants to Customer, and Customer accepts from Squoring, a non-exclusive and non-transferable right and license to use the Squoring Software that is specified in the Order Form and/or that accompanies this Agreement, but only (i) in accordance with the related Documentation, (ii) subject to Customer's payment of applicable license fees and (iii) subject to the terms and conditions specified below.

Customer agrees that Customer does not have, and does not hereby acquire, any title or rights of ownership in any Squoring Software or, except for the license rights hereby granted, any right to use, copy, transfer or disclose all or any portion of any Squoring Software. The Squoring Software is protected by copyright laws and international treaties.

3) FEES

The fees for the license under this Agreement are set forth in the applicable Order Form or, if no Order Form exists, in the applicable Technical and Financial proposal issued by Squoring, or, if no proposal exists, then in accordance with Squoring current list prices.

4) USE

(a) Unless otherwise stated in a special agreement, all dissemination or commercial exploitation of Squoring Software results is strictly forbidden.

(b) The license granted by this Agreement is a license under which a maximum number of active users and projects specified in the Order Form may use the Squoring Software. An "Active User" is a physical user registered in the Squoring Software database. Active Users are not shared among several Squoring software databases. A user is active if any activity has been recorded by the Square Server Software in the past 6 months. Activities include remote project creation, viewing of analysis results, and e-mail notification.

(c) The management and regulation of Active Users is managed by the License Server Software hosted on the Target hardware designated by the Customer.

(d) Except for continuous integration purpose, it is strictly forbidden to share the same Squoring Software login between different physical users.

(e) Customer will ensure that at least one of its employees has completed the two days on-site training course "Administrating Squoring software" given by a Squoring Software certified trainer, and that such trained employee(s) are the people within Customer's organization who are responsible for interactions with Squoring on maintenance and support matters.

(f) Customer may make a reasonable number of back-up or archival copies of the Software. Customer will reproduce all confidentiality and proprietary notices on each of these copies and maintain an accurate record of the location of each of these copies.

(g) Customer will not:

- . Reverse compile, disassemble, or otherwise reverse engineer any Squoring Software, or allow anyone else to do so (except only to the extent such prohibition is contrary to applicable law).
- . Remove or destroy any proprietary markings or legends or any encrypted license keys or similar security devices placed upon or contained in any Squoring Software.
- . Modify or adapt the Squoring Software or create a derivative work based on or incorporate the Squoring Software into or with other software.
- . Unless otherwise stated in a special agreement, distribute, sublicense, share, display, or in any manner make the Squoring Software available to any third party, with or without compensation.
- . Use all or any part of the Squoring Software to create other software a principal purpose of which is to perform the same or similar functions as, or to replace any component of, the Squoring Software.

5. MAINTENANCE AND SUPPORT

(a) Depending on the type of licenses bought by the Customer, Squoring will provide support and maintenance services according to the following schedule:

i. In case of perpetual licenses bought by Customer

- . Maintenance fees will be charged in addition to the price of the purchase of the Squoring Software licenses. The annual initial amount of maintenance fees will be calculated on the basis of a 20% percentage of the net list price of the software licenses purchased by the Customer.
- . After one year, Maintenance and Support services will be renewed by tacit agreement of the parties, for annual periods. Before the anniversary date of each license for which Support Services are in effect, Squoring shall advise the Customer of the applicable Maintenance and Support Service fees for the coming year.
- . The termination of maintenance contract will be effective only by sending a registered letter with acknowledgement of receipt denouncing the contract at least 60 days before the end of the period of validity.

ii. In case of software licenses subscription

If the license to use the software is subject to a periodic subscription, the maintenance cost for these licenses is included in the subscription price. The maintenance is so provided during all the duration of the subscription, and stops automatically at the end of the subscription validity.

(b) Conditions. Maintenance and support services as defined hereafter in paragraph 5-(c) are applicable subject to the following conditions:

- . Squoring Software is covered by a valid maintenance contract for all acquired Squoring software licenses.
- . Squoring Software was not modified by the Customer.
- . The version of the installed Squoring Software corresponds to one of the two latest annual major updates distributed by Squoring Technologies.
- . Customer engages to comply with the normal use of the software, strictly comply with the instructions given by the Squoring Technologies and to respect all provisions in the present agreement.
- . Customer shall nominate from among its staff a technical coordinator and an alternate coordinator at the Customer Site(s), with up to date knowledge of Squoring licensed products usage and sufficient technical knowledge to interact with Squoring support staff. In case of change of the coordinators, the Customer will provide written notification to Squoring Technologies.

(c) Maintenance and support services include:

- . Assistance from support: the online support (hot line) is available during Squoring normal business hours from 9 am to 6 pm (Central European Time) to answer the questions of the technical coordinator when technical facts encountered in the use of the Squoring Software. Support will help to identify problems and provide, where appropriate, temporary fixing patches. Contact information for support is:
 - support site: <https://support.squoring.com>
 - email: support@squoring.com
- . Corrective maintenance: the corrective maintenance includes the development, to the extent commercially reasonable, of workarounds or program fixes for malfunctions submitted by Customer. Are considered as malfunctions recognized or reproducible defects resulting in distorted results compared to those defined in the software Manual and not coming from non-observance of the instructions of the said Manual.
- . Updates: updates include the delivery of successive versions of the software, being either due to bug fixes or to enhancements of performances or features (this delivery does not necessarily provide new additional features). Customer will destroy any prior version before installing a new update.
- . Rehost: any change of "Target hardware" implies a change of license keys and shall be subject to the prior written authorization of Squoring and to the signature by the

Customer of a letter of destruction of all the license files already installed.

d) Maintenance and support services do not include:

- . Time spent, after request of the Customer by Squoring Technologies staff not directly attributable to maintenance services: search for non-reproducible anomalies, malfunction due to non-compliance with the Manual without the Software itself being an issue, unavailability of the system, operating activities prior to the intervention (such as preliminary backup ...).
- . Installation of the Software by Squoring Technologies.
- . Additional services which do not fall within the scope of maintenance services as defined above in paragraph 5-(c).
- . On-site support: Squoring may offer on-site support to Customer at additional charges

e) Procedure for the submission of requests:

- . To be taken into account, Customer requests shall be sent using the support site at <https://support.squoring.com>
- . Customer agrees to give, in support of a request for correction due to an anomaly, any information likely to facilitate the search for the causes of this anomaly, and to give for free to Squoring Technologies an open access to its premises and development stations in the day and hours necessary to perform the contract, and to ensure the conservation, under the conditions of appropriate security and condition of the latest version, of the sources of programs in case of this is necessary to enable Squoring Technologies to perform its maintenance services.
- . Regarding correction of anomalies, Squoring is committed to act as soon as possible to correct the anomalies detected. Squoring will transfer to the Customer either a technique to bypass the anomaly or a patch of necessary corrections or a new version of the software.
- . Any issues not resolved with the initial response will be investigated using the data provided. Below are the targeted response times for continued investigations.
 - Blocker: 1 day, daily update. A request is "blocking" when the incident has a significant impact with a risk of operating loss or when datas are corrupted. The significant impact is appreciated by Squoring Technologies.
 - Serious: 2 days, weekly update
 - Major: 3 days, monthly update
 - Minor: 1 week, monthly update

(f) Limitations

- . Squoring is expressly subject to an obligation of means.
- . Squoring is not required to (i) develop and release any, or any particular type of enhancements or (ii) customize the enhancements to satisfy Customer's particular requirements.
- . The Updates will not include any upgrade or new version of the Products that Squoring decides, in its sole discretion, to make generally available as a separately priced item.
- . Squoring will be released from any responsibility in case of breach by the Customer of any provision of this maintenance terms and conditions.

6. WARRANTIES AND REMEDIES

(a) Limited Warranty. Squoring warrants that it has the right to (i) enter into this Agreement and (ii) grant the licenses hereunder. Squoring also warrants that the Squoring Software will perform substantially as described in the Documentation during a 90 days Warranty Period. Customer acknowledges that (i) the Products may not satisfy

all of Customer's requirements and (ii) the use of the Products may not be uninterrupted or error-free.

(b) Remedies. Squoring or its representative will correct or replace any defective Software. Customer acknowledges that this paragraph sets forth Customer's exclusive remedy, and Squoring exclusive liability, for any breach of warranty or other duty related to the quality of the Products.

(c) Disclaimer. EXCEPT AS EXPRESSLY PROVIDED IN THIS AGREEMENT OR REQUIRED BY APPLICABLE LAW, ALL WARRANTIES, CONDITIONS, REPRESENTATIONS, INDEMNITIES AND GUARANTEES WITH RESPECT TO THE PRODUCTS, WHETHER EXPRESS OR IMPLIED, ARISING BY LAW, CUSTOM, PRIOR ORAL OR WRITTEN STATEMENTS BY SQUORING, ITS SQUORINGS OR REPRESENTATIVES OR OTHERWISE (INCLUDING, BUT NOT LIMITED TO ANY WARRANTY OF MERCHANTABILITY, SATISFACTION AND FITNESS FOR A PARTICULAR PURPOSE) ARE HEREBY OVERRIDDEN, EXCLUDED AND DISCLAIMED.

IN NO EVENT SHALL THE AGGREGATE LIABILITY OF SQUORING TO CUSTOMER ON ACCOUNT OF ANY MATTER ARISING WITH RESPECT TO THE SQUORING SOFTWARE EXCEED THE LICENSE FEES PAID BY CUSTOMER UNDER THIS AGREEMENT.

(d) Infringement Indemnity. If an action is brought against Customer claiming that the Product infringes a patent, trade secret or copyright, Squoring will defend Customer at Squoring expense and, subject to this Section, pay the damages and costs finally awarded against Customer in the infringement action, but only if (i) Customer notifies Squoring promptly upon learning that the claim might be asserted, (ii) Squoring has sole control over the defense of the claim and any negotiation for its settlement or compromise, and (iii) Customer takes no action that is contrary to Squoring interest. If a claim described above may be or has been asserted, Customer will permit Squoring, at Squoring option and expense, to (A) procure the right to continue using the Product, (B) replace or modify the Product to eliminate the infringement while providing functionally equivalent performance, or (C) accept the return of the Product and refund to Customer the License Fee actually paid to Squoring for such Product, less depreciation based on a 5-year straight-line-depreciation schedule.

Squoring shall have no indemnity obligation to Customer under this Section if the patent or copyright infringement claim results from (i) a correction or modification of the Product not provided by Squoring, (ii) the failure to promptly install an Update or Enhancement at Squoring direction with knowledge that installation thereof would have avoided the infringement or (iii) the combination of the Product with other non-Squoring software or (iv) any unauthorized use of the Squoring Software, or (v) any version of the Software other than the latest update offered by Squoring to Customer at no additional charge.

7. LIMITATION OF LIABILITY

UNDER NO CIRCUMSTANCES WILL SQUORING OR ITS SQUORINGS BE LIABLE FOR ANY CONSEQUENTIAL, INDIRECT, SPECIAL, PUNITIVE OR INCIDENTAL DAMAGES OR LOST PROFITS, WHETHER FORESEEABLE OR UNFORESEEABLE, BASED ON CUSTOMER'S CLAIMS OR THOSE OF ITS CUSTOMERS (INCLUDING, BUT NOT LIMITED TO, CLAIMS FOR LOSS OF DATA, GOODWILL, USE OF MONEY OR USE OF THE PRODUCTS, INTERRUPTION IN USE OR AVAILABILITY OF DATA, STOPPAGE OF OTHER WORK OR IMPAIRMENT OF OTHER ASSETS), ARISING OUT OF BREACH OR FAILURE OF EXPRESS OR IMPLIED WARRANTY, BREACH OF CONTRACT, MISREPRESENTATION, NEGLIGENCE, STRICT LIABILITY IN TORT OR OTHERWISE. IN NO EVENT WILL THE AGGREGATE LIABILITY WHICH SQUORING OR ITS SQUORINGS MAY INCUR IN ANY ACTION OR PROCEEDING EXCEED THE LICENSE FEES ACTUALLY PAID BY CUSTOMER FOR THE SPECIFIC PRODUCT THAT DIRECTLY CAUSED THE DAMAGE. THIS SECTION WILL

NOT APPLY ONLY WHEN AND TO THE EXTENT THAT APPLICABLE LAW SPECIFICALLY REQUIRES LIABILITY, DESPITE THE FOREGOING EXCLUSION AND LIMITATION.

8. OWNERSHIP

All trademarks, service marks, patents, copyrights, trade secrets and other proprietary rights in or related to the Products are and will remain the exclusive property of Squoring, whether or not specifically recognized or perfected under local applicable law. Customer will not take any action that jeopardizes Squoring proprietary rights or acquire any right in the Products, except the limited use rights specified in Section 4. Squoring will own all rights in any copy, translation, modification, adaptation or derivation of the Products, including any improvement or development thereof.

9. CONFIDENTIALITY

(a) Confidentiality. Customer acknowledges that the Products constitute and incorporate confidential and proprietary information developed or acquired by or licensed to Squoring. Customer will take all reasonable precautions necessary to safeguard the confidentiality of the Products, including at a minimum those taken by Customer to protect Customer's own confidential information. Customer will not allow the removal or defacement of any confidentiality or proprietary notice placed on the Products. The placement of copyright notices on these items will not constitute publication or otherwise impair their confidential nature.

(b) Disclosure. Customer will not disclose, in whole or in part, the Products or any portion thereof or other information that has been designated as confidential to any individual, entity or other person, except to those of Customer's employees or consultants who require access for Customer's authorized use of the Products, provided such consultants agree in writing to comply with the use and non-disclosure restrictions applicable to the Products under this Agreement. Customer acknowledges that any unauthorized use or disclosure of the Products may cause irreparable damage to Squoring. If an unauthorized use or disclosure occurs, Customer will immediately notify Squoring and take, at Customer's expense, all steps which may be available to recover the Products and to prevent their subsequent unauthorized use or dissemination. Squoring agrees to take the same action regarding any information designated in writing as proprietary which it receives from Customer ("Customer Information").

(c) Limitation. Neither Squoring nor Customer will have any confidentiality obligation with respect to any portion of the Products or Customer Information that (i) the receiving party knew or independently developed before receiving such Products or Customer Information under this Agreement, (ii) the receiving party lawfully obtained from a third party under no confidentiality obligation, or (iii) became available to the public other than as a result of any act or omission by the receiving party or any of receiving party's employees or consultants.

10. TERMINATION

Customer may terminate this Agreement or any Order Form, without right to refund, by notifying Squoring of such termination and returning the Product and copies thereof to Squoring. Squoring may terminate this Agreement, upon reasonable notice and without judicial or administrative resolution, if Customer or any of Customer's employees or

consultants breach any material term or condition hereof. This Agreement will terminate automatically if Customer becomes insolvent or enters into bankruptcy, suspension of payments, moratorium, or any other proceeding that relates to insolvency or protection or creditors' rights.

Upon the termination of this Agreement for any reason, all rights granted to Customer hereunder will cease, and Customer will stop using Squoring Software, return or destroy all copies and so certify to Squoring in writing. The provisions of Sections 6-8 will survive the termination of this Agreement.

11. INSPECTION

During the term of this Agreement, Squoring or its representative, if in receipt of credible evidence of non-compliance, may, upon prior notice to Customer, inspect the files, computer processors, equipment and facilities of Customer during normal working hours to verify Customer's compliance with this Agreement. While conducting such inspection, Squoring or its representative will be entitled to copy any item that Customer may possess in violation of this Agreement, without disruption of Squoring business and violation of Laws and Regulations.

12. ASSIGNMENT

Customer shall not assign, delegate or otherwise transfer this Agreement or any of its rights or obligations hereunder without Squoring prior approval which shall not be unreasonably withheld.

13. MISCELLANEOUS

. Any terms and conditions of any unilateral letter, memorandum, purchase order or other writing issued by Customer shall not be binding on Squoring. Any waiver or modification of this Agreement will not be effective unless executed in writing and signed by an authorized representative of Squoring and Customer. This Agreement will bind Customer's successors-in-interest.

. This Agreement will be governed by and interpreted in accordance with the laws of France. If any provision of this Agreement is held to be unenforceable, in whole or in part, such holding will not affect the validity of the other provisions of this Agreement, unless the Parties in good faith deem the unenforceable provision to be essential, in which case either Party may terminate this Agreement effective immediately upon notice to the other Party. This Agreement constitutes the complete and entire statement of all conditions and representations of the agreement between Squoring and Customer with respect to its subject matter and supersedes all prior writings or understandings.

Redistributed Software

Redistributed Software	Version	License File
Wildfly	10.1.0.Final	lgpl-2.1
PostgreSQL	8.4	postgresql-bsd
Perl	5.12.3	al
TCL	8.5	tcltkl,tcllib

PhantomJS		2.1.1	bsd3
Components	Sub component	Version	License File

Richfaces		4.5.17	lgpl-2.1
PostgreSQL JDBC Driver		42.0.0	bsd2
Oracle JDBC driver		12.1.02	otn
Omnifaces		2.6	apache-2.0
ANTLR		3.1	antlr3
JasperReports Library		4.8	lgpl-2.1
Checkstyle		5.6	lgpl-2.1
JTcl		2.8	jtcl, amd, itcl, janino,
tcllib, tcltk, ucb			
log4j		1.2.17	apache-2.0
Apache Commons	commons-lang3	3.1	apache-2.0
Apache HttpComponents	httpclient	4.1.2	apache-2.0
Apache HttpComponents	httpmime	4.1.2	apache-2.0
Apache XML Graphics	batik-transcoder	1.7	apache-2.0
Bouncy Castle	bcmail-jdk16	1.46	bouncy-castle
com.beust	jcommander	1.48	apache-2.0
com.google.collections	google-collections	1.0	apache-2.0
com.googlecode.juniversalchardet	juniversalchardet	1.0.3	mpl1.1
com.sun.mail	javax.mail	1.5.3	gf
commons-cli	commons-cli	1.2	apache-2.0
commons-collections	commons-collections	3.2.2	apache-2.0
javax.enterprise	cdi-api	1.2	apache-2.0
javax.validation	validation-api	1.1.0.Final	apache-2.0
net.java.dev.jna	jna	4.1.0	lgpl-2.1
net.sf.jsci	jsci	1.2	lgpl-2.1
net.sf.saxon	saxon-xom	8.7	mpl1.0
nux	nux	1.6	nux
org.glassfish	javax.json	1.0.4	gf
org.jdom	jdom2	2.0.5	jdom
Resources		Version	License File

CodeMirror		4.4.0	mit
font-awesome		4.7.0	mit, ofl-1.1
JavaScript InfoVis Toolkit		2.0.1	mit
jquery		1.12.3	jquery
jquery-mobile		1.4.2	jquery-mobile
jquery-ui-resizable		1.11.4	mit, jquery
lodash.js		4.17.11	mit
notify.js		0.4.2	mit
gridstack.js		1.0.0	mit
spectrum.js		1.8.0	mit

Index

@

©, 25

A

ABAP, 4

ADA, 15

Acceptance Testing, 276

Accessibility, 276

Accuracy, 276

Accuracy of Measurement, 277

Acquirer, 277

Action, 278

Activity, 278

Actor, 279

Adaptability, 279

Agreement, 280

Analysability, 280

Analysis Model, 280

Architecture, 280

Attractiveness, 281

Attribute, 281

Availability, 282

B

Base Measure, 282

Baseline, 283

Branch, 283

Branch Coverage, 284

Branch Testing, 284

Budget, 285

Build, 285

C

CMMi, 442

COBOL, 37

CPP, 50

CSHARP, 62

Call Graph, 285

Capability Maturity Model, 286

Certification, 286

Certification Criteria, 287

Change Control Board, 287

Change Control System, 287

Change Management, 288

Changeability, 288

Co-existence, 288

Code, 289

Code Coverage, 289

Code Freeze, 289

Code Review, 290

Code Verification, 290

Coding, 290

Cohesion, 290

Commercial-Off-The-Shelf (COTS), 291

Commit, 291

Commitment, 292

Compatibility, 292

Complexity, 293

Component, 293

- Conciseness, [294](#)
- Condition, [294](#)
- Configuration, [294](#)
- Configuration Control, [295](#)
- Configuration Item, [295](#)
- Configuration Management, [296](#)
- Configuration Management System, [297](#)
- Conflict, [297](#)
- Conformance, [298](#)
- Connectivity, [298](#)
- Consistency, [298](#)
- Constraint, [298](#)
- Content Coupling, [299](#)
- Context of Use, [300](#)
- Contract, [300](#)
- Control Coupling, [300](#)
- Control Flow, [301](#)
- Control Flow Diagram, [301](#)
- Convention, [301](#)
- Correctability, [301](#)
- Correctness, [302](#)
- Coupling, [302](#)
- Coverage, [303](#)
- Criteria, [303](#)
- Criticality, [304](#)
- Custom Software, [304](#)
- Customer, [304](#)

D

- DOD-STD-2167A, [442](#)
- Data, [305](#)
- Data Coupling, [306](#)
- Data Flow, [306](#)
- Data Flow Diagram, [306](#)
- Data Management, [307](#)
- Data Model, [307](#)
- Data Processing, [308](#)
- Data Provider, [308](#)
- Data Providers
 - AntiC, [192](#)
 - Automotive Coverage Import, [192](#)
 - Automotive Tag Import, [193](#)
 - Bauhaus, [221](#)
 - BullseyeCoverage Code Coverage Analyzer, [193](#)
 - CANoe, [193](#)
 - CPD, [194](#)
 - CPPTest, [195](#)
 - CPU Data Import, [226](#)
 - CSV Findings, [222](#)
 - CSV Import, [223](#)
 - Cantata, [196](#)
 - CheckStyle, [196](#)
 - CheckStyle (plugin), [197](#)
 - CheckStyle for SQALE (plugin), [197](#)
 - Cobertura format, [198](#)
 - CodeSniffer, [221](#)
 - CodeSonar, [198](#)
 - Compiler, [199](#)
 - Configuration Checker, [221](#)
 - Coverity, [199](#)
 - Cppcheck, [194](#)
 - Cppcheck (plugin), [195](#)
 - Csv, [489](#)

- Csv Coverage Import, [222](#)
- Csv Tag Import, [224](#)
- CsvPerl, [494](#)
- ESLint, [200](#)
- Excel Import, [227](#)
- ExcelMetrics, [509](#)
- FindBugs, [200](#)
- FindBugs (plugin), [200](#)
- FindingsPerl, [254](#), [505](#)
- Frameworks, [254](#)
- Function Relaxer, [201](#)
- FxCop, [202](#)
- GCov, [202](#)
- GNATCompiler, [203](#)
- GNATcheck, [202](#)
- GNAThub, [225](#)
- Generic, [496](#)
- Generic Findings Xml Import, [224](#)
- GenericPerl, [254](#), [502](#)
- JSHint, [203](#)
- JUnit Format, [204](#)
- JaCoCo, [204](#)
- Jira, [241](#)
- Klocwork, [205](#)
- Klocwork MISRA, [205](#)
- MISRA Rule Checking using PC-lint, [208](#)
- MISRA Rule Checking with QAC, [210](#)
- MSTest, [206](#)
- MSTest Code Coverage, [206](#)
- Mantis, [243](#)
- MemUsage, [207](#)
- Memory Data Import, [230](#)
- NCover, [207](#)
- OSLC, [244](#)
- Oracle PLSQL compiler Warning checker, [208](#)
- PHP Code Coverage, [245](#)
- PMD, [209](#)
- PMD (plugin), [209](#)
- Polyspace, [210](#)
- QAC 8.2, [247](#)
- QAC 8.2 CERT Import, [247](#)
- Rational Logiscope, [206](#)
- ReqIF, [212](#)
- Requirement Data Import, [231](#)
- SQL Code Guard, [212](#)
- SonarQube, [248](#)
- Squan Sources, [213](#)
 - Adding More File Types, [249](#)
 - Advanced COBOL parsing, [253](#)
- Square Import, [217](#)
- Square Virtual Project, [218](#)
- Stack Data Import, [235](#)
- StyleCop, [218](#)
- StyleCop (plugin), [218](#)
- Tessy, [219](#)
- Test Data Import, [236](#)
- Testwell CTC++, [248](#)
- Ticket Data Import, [238](#)
- Unit Test Status from Rational Test RealTime, [211](#)
- VectorCAST, [219](#)
- VectorCAST API, [220](#)
- csv_findings, [254](#), [493](#)
- csv_import, [483](#)

- pep8, 245
- pycodestyle / pep8 (plugin), 245
- pylint, 246
- pylint (plugin), 246
- vTestStudio, 249
- xml, 254, 486
- Data Store, 308
- Data Type, 308
- Database, 309
- Decision Criteria, 309
- Decoupling, 310
- Defect, 310
- Degree of Confidence, 310
- Deliverable, 311
- Delivery, 311
- Dependability, 311
- Deployment, 312
- Derived Measure, 312
- Design, 313
- Design Pattern, 313
- Developer, 313
- Development, 314
- Development Testing, 314
- Direct Measure, 315
- Direct Metric, 315
- Document, 316
- Documentation, 316
- Dynamic Analysis, 317

E

- Earned Value, 318
- Effectiveness, 318
- Efficiency, 318
- Efficiency Compliance, 319
- Effort, 319
- Encapsulation, 319
- End User, 320
- Entity, 320
- Entry Point, 321
- Environment, 321
- Error, 321
- Error Tolerance, 322
- Evaluation, 322
- Evaluation Activity, 323
- Evaluation Group, 323
- Evaluation Method, 324
- Evaluation Module, 324
- Evaluation Technology, 325
- Evaluation Tool, 325
- Execute, 325
- Execution Efficiency, 326
- Execution Time, 326
- Exit, 326
- Expandability, 327
- Export Definitions, 254
- Extendability, 327
- External Attribute, 327
- External Measure, 327
- External Quality, 328
- External Software Quality, 329

F

FORTTRAN, 75
Facility, 329
Failure, 329
Failure Rate, 330
Fault, 331
Fault Tolerance, 331
Feasibility, 332
Feature, 332
Feature Freeze, 332
Finite State Machine, 333
Flexibility, 333
Frozen Branch, 333
Function, 334
Functional Analysis, 334
Functional Requirement, 335
Functional Size, 335
Functional Testing, 335
Functional Unit, 336
Functionality, 336
Functionality Compliance, 336

G

Generality, 337
Generic Practice, 337
Glossary, 337
Goal, 337
Granularity, 338

H

Historical Information, 338
Hybrid Coupling, 338

I

IEC 61508, 443
IEC 61508-3, 443
IEC 61508-7, 443
IEEE 1012, 444
IEEE 1058, 444
IEEE 1061, 444
IEEE 1074, 445
IEEE 1220, 445
IEEE 1233, 445
IEEE 1320, 445
IEEE 1362, 446
IEEE 1490, 446
IEEE 610.12, 446
IEEE 829, 446
IEEE 830, 447
IEEE 982, 447
ISO 5806, 447
ISO 8402, 447
ISO 9001, 448
ISO 9127, 448
ISO 9241, 448
ISO 9241-10, 449
ISO 9241-11, 450
ISO/IEC 12119, 451
ISO/IEC 12207, 451
ISO/IEC 14143, 451
ISO/IEC 14143-1, 452
ISO/IEC 14143-3, 452

ISO/IEC 14598, 452
ISO/IEC 14598-1, 453
ISO/IEC 14598-2, 453
ISO/IEC 14598-3, 454
ISO/IEC 14598-4, 455
ISO/IEC 14598-5, 455
ISO/IEC 14598-6, 456
ISO/IEC 14756, 456
ISO/IEC 14764, 456
ISO/IEC 15026, 457
ISO/IEC 15026-1, 457
ISO/IEC 15026-2, 457
ISO/IEC 15288, 458
ISO/IEC 15289, 458
ISO/IEC 15414, 459
ISO/IEC 15474, 459
ISO/IEC 15474-1, 459
ISO/IEC 15474-2, 460
ISO/IEC 15504, 460
ISO/IEC 15504-1, 461
ISO/IEC 15504-2, 461
ISO/IEC 15504-3, 462
ISO/IEC 15504-4, 462
ISO/IEC 15504-5, 463
ISO/IEC 15504-6, 464
ISO/IEC 15504-7, 464
ISO/IEC 15846, 465
ISO/IEC 15910, 465
ISO/IEC 15939, 466
ISO/IEC 19759, 466
ISO/IEC 19770, 466
ISO/IEC 19770-1, 467
ISO/IEC 19770-2, 467
ISO/IEC 20000, 468
ISO/IEC 2382, 468
ISO/IEC 2382-1, 469
ISO/IEC 25000, 469
ISO/IEC 25001, 470
ISO/IEC 25010, 470
ISO/IEC 25012, 471
ISO/IEC 25020, 471
ISO/IEC 25021, 471
ISO/IEC 25030, 472
ISO/IEC 25040, 472
ISO/IEC 25045, 473
ISO/IEC 25051, 473
ISO/IEC 25060, 473
ISO/IEC 25062, 474
ISO/IEC 26514, 474
ISO/IEC 29881, 474
ISO/IEC 90003, 475
ISO/IEC 9126, 475
ISO/IEC 9126-1, 476
ISO/IEC 9126-2, 477
ISO/IEC 9126-3, 477
ISO/IEC 9126-4, 478
ISO/IEC 9294, 478
ISO/IEC 99, 479
ISO/IEC SQuaRE, 479
ISO/IEC/IEEE 15289, 480
ISO/IEC/IEEE 24765, 481
Impact Analysis, 338
Implementation, 339

Implied Needs, 339
Incremental Development, 340
Indicator, 340
Indicator Value, 340
Indirect Measure, 341
Indirect Metric, 341
Information, 342
Information Analysis, 342
Information Management, 342
Information Need, 343
Information Product, 343
Inspection, 343
Installability, 344
Installation Manual, 344
Integration, 344
Integration Test, 345
Integrity, 345
Interface Testing, 345
Intermediate Software Product, 345
Internal Attribute, 346
Internal Measure, 346
Internal Quality, 347
Internal Software Quality, 347
Interoperability, 348
Interoperability Testing, 348
Interval Scale, 349
Item, 349
Iteration, 349

J

JAVA, 83
JAVASCRIPT, 93

K

Key Practices, 349
Key Process Area, 350
Knowledge Base, 350

L

Languages
ABAP, 4
ADA, 15
C, 25
COBOL, 37
CPP, 50
CSHARP, 62
FORTRAN, 75
JAVA, 83
JAVASCRIPT, 93
MINDC, 101
OBJECTIVEC, 113
PHP, 125
PYTHON, 135
SQL, 143
TSQL, 151
VBNET, 158
XAML, 170
Learnability, 351
Lessons Learned, 351
Level of Performance, 351
Licences, 518
Life Cycle, 352

Life Cycle Model, 352

M

MINDC, 101

Maintainability, 352

Maintainability Compliance, 353

Maintainer, 353

Maintenance, 354

Maintenance Manual, 355

Maturity, 355

Measurable Concept, 355

Measurand, 356

Measure, 356

Measurement, 357

Measurement Analyst, 358

Measurement Experience Base, 358

Measurement Function, 358

Measurement Method, 359

Measurement Procedure, 359

Measurement Process, 359

Measurement Process Owner, 360

Measurement Sponsor, 360

Measurement User, 360

Metric, 360

Metrics

 % of parsed tokens, 79, 139, 165

 AND operators, 18

 Andthen Operators, 4, 15, 25, 51, 62, 75, 84, 93, 101, 114, 125, 143, 158, 170

 Arithmetic Operators, 37

 Assignment Operators, 25, 51, 63, 84, 101, 114

 Blank Lines, 4, 15, 25, 37, 51, 63, 75, 84, 93, 102, 114, 126, 135, 143, 151, 159, 170

 Brace Lines, 4, 15, 25, 52, 63, 75, 84, 93, 102, 114, 126, 135, 143, 151, 159

 Break in Loop, 25, 52, 63, 75, 84, 94, 102, 114, 135, 144, 152, 159, 170

 Break in Switch, 25, 52, 63, 84, 94, 102, 115, 159, 171

 CALL Statements, 37

 Call Graph Depth, 5, 16, 27, 38, 52, 64, 76, 85, 94, 103, 115, 126, 136, 144, 152, 160, 171

 Call to exit, 6, 39, 128, 137, 162

 Called Depth, 27, 103

 Called External Functions, 26, 102

 Called Functions, 26, 102

 Calling Depth, 27, 103

 Calling Functions, 26, 102

 Calls From, 26, 102

 Calls To, 26, 102

 Case Blocks, 4, 15, 25, 52, 64, 75, 85, 94, 102, 115, 144, 159, 171

 Case Labels, 4, 15, 26, 52, 64, 76, 85, 94, 102, 115, 126, 144, 159, 171

 Catch Statements, 4, 52, 64, 85, 94, 115, 126, 135, 144, 152, 159, 171

 Cloned Code, 4, 7, 15, 18, 26, 29, 37, 40, 52, 54, 64, 66, 76, 78, 85, 87, 94, 96, 103, 105, 115, 117, 126, 129, 135, 138, 144, 146, 152, 154, 160, 163, 171, 173

 Cloned Control Flow Tokens, 5, 7, 16, 18, 27, 29, 38, 40, 52, 55, 64, 66, 76, 78, 85, 87, 94, 96, 103, 105, 115, 117, 126, 129, 136, 138, 144, 146, 152, 154, 160, 163, 171, 173

 Clones Number, 5, 16, 27, 38, 53, 64, 76, 85, 95, 104, 116, 127, 136, 144, 152, 160, 172

 Code Cloning Line Counting, 5, 16, 26, 37, 52, 64, 76, 85, 94, 103, 115, 126, 136, 144, 152, 160, 171

 Comment Lines, 5, 16, 27, 38, 53, 64, 76, 85, 94, 103, 115, 127, 136, 144, 152, 160, 171

 Comment lines with code, 38

 Comment lines without alphabetic characters, 38

 Commented Statements, 6, 16, 27, 38, 53, 65, 76, 86, 95, 104, 116, 127, 136, 145, 153, 160, 172

 Comments containing FIXME, 7, 17, 28, 40, 54, 66, 77, 87, 95, 104, 117, 128, 137, 145, 153, 162, 172

 Comments containing TODO, 9, 22, 32, 42, 58, 71, 79, 90, 98, 109, 121, 131, 139, 148, 155, 166, 174

 Comparison Operators, 27, 53, 65, 86, 104, 116

 Compiler FLAG Nested Level, 31, 57, 70, 107, 120, 148

 Conditions, 38

 Constant Data, 50, 62, 83, 113, 125, 158

Constant Methods, 55, 67, 129
Constant Properties, 68
Constants, 19
Continue Statements, 5, 27, 53, 65, 76, 86, 95, 104, 116, 127, 136, 145, 152, 160, 172
Control Flow Token, 5, 16, 26, 37, 52, 64, 76, 85, 94, 103, 115, 126, 136, 144, 152, 160, 171
Cyclomatic Complexity, 5, 16, 26, 37, 52, 64, 76, 85, 94, 103, 115, 126, 136, 144, 152, 160, 171
DISPLAY statements, 39
Data Declarations, 41
Data Used, 41
Debug lines, 38
Declare Members, 163
Declare operators, 16
Declared functions, 19
Default Statement, 6, 16, 28, 53, 65, 77, 86, 95, 104, 116, 127, 145, 161, 172
Delegate Members, 163
Delete Statements, 153
Depth of Descendant Tree, 53, 65, 86, 116, 127, 136, 161
Depth of Inheritance Tree, 53, 65, 86, 116, 127, 137, 161
Derived types, 20
Distinct Operands, 6, 17, 28, 39, 53, 65, 77, 86, 95, 104, 116, 127, 137, 145, 153, 161, 172
Distinct Operands in Data Div., 39
Distinct Operands in Procedure Div., 39
Distinct Operators, 6, 17, 28, 39, 53, 65, 77, 86, 95, 104, 116, 127, 137, 145, 153, 161, 172
Distinct Operators in Data Div., 39
Distinct Operators in Procedure Div., 39
Do While Statements, 28, 54, 65, 77, 86, 95, 104, 116, 127, 161, 172
EVALUATE Statements, 39
Else Statements, 6, 17, 28, 39, 54, 65, 77, 86, 95, 104, 117, 128, 137, 145, 153, 161, 172
End Statements, 163
Entry Statements, 17
Events, 161
Exception When blocks, 17
Exception handlers, 17
Exceptions, 19
Executable Statements, 8, 21, 32, 41, 58, 71, 79, 89, 97, 108, 121, 131, 139, 148, 155, 166, 174
Fiend Attributes, 158
File Declarations, 39
File Type Count, 7
Files Used, 40
For Statements, 7, 17, 28, 54, 66, 77, 87, 95, 104, 117, 128, 137, 145, 162, 173
Foreach Statements, 66, 128
Friend Events, 161
Friend Members, 163
Friend Properties, 165
Generic object, 18
Goto Statements, 17, 28, 40, 54, 66, 78, 105, 117, 128, 146, 153, 162, 173
HTML Lines of Code, 129
Header Blocks Of Comment, 4, 15, 25, 51, 63, 75, 84, 93, 101, 114, 126, 135, 143, 151, 159
Header Lines Of Code, 7, 18, 29, 54, 66, 78, 87, 96, 105, 117, 128, 138, 146, 154, 162
Header Lines Of Comment, 7, 18, 28, 54, 66, 78, 87, 96, 105, 117, 128, 137, 146, 154, 162
IDMS calls for modification, 40
IDMS calls for reading/searching, 40
IDMS instructions called, 40
IDMS records called, 40
IDMS subschema definition, 40
IO Functions, 32, 108
If Statements, 7, 18, 29, 41, 55, 66, 78, 87, 96, 105, 117, 129, 138, 146, 154, 163, 173
Insert Statements, 154
Internal Data, 62
Internal Methods, 67
Internal Properties, 68
Is IDMS active, 40
Label Statements, 18, 154

Line Count, 7, 18, 29, 41, 55, 67, 78, 87, 96, 105, 118, 129, 138, 146, 154, 163, 173
Lines Added, 9, 22, 32, 42, 58, 72, 79, 90, 98, 109, 121, 132, 140, 149, 155, 167, 175
Lines Modified, 9, 22, 33, 42, 59, 72, 80, 90, 98, 109, 121, 132, 140, 149, 156, 167, 175
Lines Removed, 9, 22, 33, 43, 59, 72, 80, 90, 98, 109, 121, 132, 140, 149, 156, 167, 175
Loop Statements, 8, 18, 29, 55, 67, 78, 87, 96, 106, 118, 129, 138, 146, 163, 173
Maximum Nested Structures, 8, 21, 29, 41, 56, 68, 78, 88, 97, 106, 119, 130, 138, 146, 154, 164, 173
Memory Allocation, 29, 106
Memory Freeing, 29, 106
Methods without Accessibility, 55, 67, 88, 118, 129, 164
Minimum Number of Cycles, 6, 16, 27, 38, 53, 65, 76, 86, 95, 104, 116, 127, 136, 145, 153, 160, 172
Minimum Number of Indirect Cycles, 27, 103
Mixed Lines, 8, 18, 29, 55, 67, 78, 88, 96, 106, 118, 129, 138, 146, 154, 163
Multiple Inheritance Indicator, 55, 67, 88, 118, 129, 138, 163
Must Members, 163
Must Properties, 165
Non-Cyclic Paths, 8, 21, 30, 56, 68, 78, 89, 97, 106, 119, 130, 139, 147, 154, 165, 174
Number Of Children, 56, 68, 88, 119, 130, 139, 164
Number of #DEFINE, 30, 56, 69, 106, 119, 147
Number of #ELIF, 30, 56, 69, 106, 119, 147
Number of #ELSE, 30, 56, 69, 106, 119, 147
Number of #ENDIF, 30, 56, 69, 107, 119, 147
Number of #ENDREGION, 70
Number of #ERROR, 30, 57, 70, 107, 119, 147
Number of #IF, 30, 57, 70, 107, 119, 147
Number of #IFDEF, 30, 57, 70, 107, 120, 147
Number of #IFDEF, 30, 57, 70, 107, 120, 147
Number of #PRAGMA, 31, 57, 70, 107, 120, 148
Number of #REGION, 70
Number of #UNDEF, 31, 57, 70, 107, 120, 148
Number of #WARNING, 31, 57, 70, 107, 120, 148
Number of Ancestors, 56, 68, 88, 118, 130, 138, 164
Number of Attributes, 51, 62, 83, 113, 125, 158
Number of Check instruction, 5
Number of Descendants, 56, 68, 88, 118, 130, 138, 164
Number of DocString lines, 137
Number of Include, 31, 57, 107, 120, 147
Number of Methods, 165
Number of Parameters, 30, 56, 68, 89, 97, 106, 119, 147, 165, 173
Number of Sections, 41
Number of XML elements, 172
Number of arithmetic if, 75
Number of attributes, 170
Number of comment blocks, 4, 15, 25, 51, 63, 75, 84, 93, 101, 114, 126, 135, 143, 151, 159, 170
Number of data without accessibility, 51, 62, 83, 114, 125
Number of declarative statements, 77
Number of paragraphs, 41
Number of text blocks, 174
OR operators, 19
Operand Occurrences, 9, 22, 32, 42, 58, 71, 79, 90, 98, 109, 121, 131, 139, 149, 155, 166, 175
Operand Occurrences in Data Div., 42
Operand Occurrences in Procedure Div., 42
Operator Occurrences, 9, 22, 32, 42, 58, 71, 79, 90, 98, 109, 121, 131, 140, 149, 155, 167, 175
Operator Occurrences in Data Div., 42
Operator Occurrences in Procedure Div., 42
Orelse operators, 8, 21, 30, 56, 68, 79, 89, 97, 106, 119, 130, 147, 165, 174
PERFORM Statements, 41
PHP Lines of Code, 130
PHP/HTML Mixed Lines, 129
Partial Members, 164
Private Constant, 6
Private Data, 6
Private Events, 161
Private Methods, 55, 67, 88, 118, 130, 164

Private Properties, 69, 165
Private constant, 19
Private data, 51, 63, 84, 114, 125, 158
Private exceptions, 19
Private functions/Procedures, 19
Private types, 20
Private variables, 20
Properties, 68, 119, 165
Properties with Get, 68
Properties with Set, 69
Properties without Accessibility, 69
Protected Constant, 5
Protected Data, 6, 51, 63, 84, 114, 125, 158
Protected Events, 161
Protected Internal Data, 63
Protected Internal Methods, 67
Protected Internal Properties, 69
Protected Methods, 55, 67, 88, 118, 130, 164
Protected Properties, 69, 165
Protected objects, 20
Public Constant, 5
Public Data, 6, 51, 63, 84, 114, 125, 158
Public Events, 161
Public Methods, 55, 67, 88, 118, 129, 164
Public Properties, 69, 165
Public constants, 19
Public exceptions, 19
Public functions, 19
Public types, 20
Public variables, 20
Raise statements, 21
Real comment lines with alphabetic characters, 38
Recursive Calls, 26, 103
Renamed objects, 20
Repeated Code Blocks, 8, 21, 31, 41, 57, 70, 79, 89, 97, 108, 120, 131, 139, 148, 155, 166, 174
Return Statements, 8, 21, 31, 57, 70, 79, 89, 97, 107, 120, 130, 139, 148, 154, 166, 174
STOP Statements, 41
Select Statements, 155
Separate functions/procedures, 19
Separate packages, 19
Separate tasks, 20
Shadowed Attributes, 158
Shadowed Events, 162
Shadowed Members, 164
Shadowed Properties, 165
Shared Attributes, 159
Shared Events, 162
Shared Members, 164
Shared Properties, 166
Signal Functions, 31, 108
Skipped Lines of Comment code, 8, 21, 31, 57, 71, 79, 89, 97, 108, 120, 131, 139, 148, 155, 166
Source Lines Of Code, 8, 21, 31, 41, 58, 71, 79, 89, 97, 108, 120, 131, 139, 148, 155, 166, 174
Special Operators, 32, 58, 71, 89, 108, 121
Static Data, 51, 63, 84, 114, 125
Static Methods, 55, 68, 88, 118, 130
Static Properties, 69
Stop Statements, 159
String Conversions, 32, 108
Structures Added, 7, 17, 28, 54, 66, 77, 87, 96, 105, 117, 128, 137, 145, 153, 162, 173
Structures Modified, 7, 17, 28, 54, 66, 77, 87, 96, 105, 117, 128, 137, 145, 153, 162, 173
Structures Removed, 7, 17, 28, 54, 66, 77, 87, 96, 105, 117, 128, 137, 146, 153, 162, 173
Subtypes, 20
Switch Statements, 8, 21, 32, 58, 71, 79, 89, 97, 108, 121, 131, 148, 166, 174

System Functions, 32, 108
TIMES Clauses, 42
Ternary operators, 32, 58, 71, 89, 97, 109, 121, 131, 166, 174
Throw Statements, 9, 58, 71, 90, 97, 121, 131, 139, 155, 166, 174
Time Handling, 32, 109
Try Statements, 9, 58, 71, 90, 98, 121, 131, 140, 155, 167, 175
Types, 20
UNTIL Clauses, 43
Update Statements, 156
Use of longjump, 29, 105
Use of offsetof, 30, 106
Use of setjump, 31, 108
VARYING Clauses, 43
Variables, 20
WHEN Clauses, 43
Weighted Method per Class, 59, 122
While Statements, 9, 22, 33, 59, 72, 90, 98, 109, 122, 132, 140, 149, 156, 167, 175
With statements, 21

Milestone, 361
Mock Object, 362
Model, 362
Modifiability, 362
Modifiable, 363
Modularity, 363
Module, 363
Moke Object, 364
Multidimensional Analysis, 364

N

Network, 364
Nonfunctional Requirement, 365
Nontechnical Requirement, 365

O

OBJECTIVEC, 113
Object, 365
Object Model, 366
Object Oriented Design, 366
Observation, 366
Observation Period, 367
Operability, 367
Operand, 368
Operational Testing, 368
Operator, 368
Operator Manual, 369
Optional Attribute, 369
Optional Requirement, 370
Organisational Unit, 370

P

PHP, 125
PYTHON, 135
Path, 371
Path Analysis, 371
Path Testing, 371
Pathological Coupling, 372
Peer Review, 372
Performance, 372
Performance Indicator, 373
Performance Testing, 373
Pilot Project, 373
Portability, 374

Portability Compliance, 374
Practice, 374
Precision, 375
Predictive Metric, 375
Procedure, 375
Process, 376
Process Assessment, 377
Process Assessment Model, 377
Process Capability, 377
Process Capability Determination, 378
Process Capability Level, 378
Process Context, 378
Process Improvement, 379
Process Improvement Objective, 379
Process Improvement Program, 379
Process Improvement Project, 380
Process Metric, 380
Process Outcome, 380
Process Performance, 381
Process Purpose, 381
Product, 381
Product Line, 382
Product Metric, 383
Productivity, 383
Programmer Manual, 383
Project, 384
Project Management, 384
Project Phase, 385
Prototype, 385

Q

Qualification, 385
Qualification Testing, 386
Quality, 386
Quality Assurance, 387
Quality Control, 388
Quality Evaluation, 388
Quality Factor, 389
Quality Management, 389
Quality Measure Element, 389
Quality Metric, 390
Quality Model, 390
Quality in Use, 390

R

RTCA/EUROCAE, 481
Rating, 391
Rating Level, 392
Readability, 392
Recoverability, 392
Recovery, 393
Redistributed Software, 518
Reengineering, 393
Regression Testing, 393
Release, 394
Reliability, 394
Reliability Compliance, 395
Repeatability of Results of Measurements, 395
Replaceability, 396
Repository Connectors, 254
 CVS, 188
 ClearCase, 181

- Folder (use GNATHub), 187
- Folder Path, 179
- Git, 182
- Multiple Source Nodes, 191
- PTC Integrity, 188
- Perforce, 184
- SVN, 186
- Synergy, 179
- TFS, 189
- Zip Upload, 179
- Reproducibility of Results of Measurements, 396
- Request For Change, 397
- Request For Information, 397
- Request For Proposal, 397
- Requirement, 398
- Requirements Analysis, 398
- Requirements Derivation, 399
- Requirements Document, 399
- Requirements Engineering, 400
- Requirements Partitioning, 400
- Requirements Review, 400
- Requirements Specification, 401
- Requirements Traceability, 401
- Requirements Traceability Matrix, 401
- Resource, 402
- Resource Utilisation, 402
- Result, 403
- Retirement, 403
- Reverse Engineering, 403
- Risk, 404
- Risk Acceptance, 404
- Risk Analysis, 405
- Robustness, 405
- Role, 405
- Routine, 406
- Ruleset
 - 'abort
 - exit, 37, 113
 - 'atof
 - atoi or atol' shall not be used, 36, 113
 - 'cycle' shall not be used, 82
 - 'star' parameter shall not be used., 142
 - 'stop' shall not be used, 82
 - ALTER shall not be used, 47
 - Abort shall not be used, 23
 - Assignment in Boolean, 34, 60, 73, 91, 99, 110, 123, 133, 141, 176
 - Assignment without Comparison, 34, 60, 73, 91, 99, 110, 123, 133, 141, 176
 - Avoid Duplicated Blocks in Function, 14, 24, 35, 49, 61, 74, 82, 92, 100, 112, 124, 134, 142, 151, 157, 169, 178
 - Avoid GOTO jumps out of PERFORM range, 49
 - Avoid OPEN/CLOSE inside loops, 49
 - Avoid SELECT SQL statement with a WHERE clause containing the NOT EQUAL operator, 11
 - Avoid SELECT SQL statement without a WHERE clause, 11
 - Avoid UPDATE or DELETE SQL Statement without a WHERE clause, 11
 - Avoid accessing data by using the position and length, 49
 - Avoid calling a function module without handling exceptions, 13
 - Avoid mixing paragraphs and sections, 49
 - Avoid obsolete DATA BEGIN OF OCCURS statement, 10
 - Avoid using APPEND in SQL SELECT statements, 9
 - Avoid using APPEND statements in loops, 9
 - Avoid using BREAK-POINT, 10
 - Avoid using CHECK in SQL SELECT statements, 10
 - Avoid using COMMIT WORK statements in loops, 10

Avoid using GROUP BY in queries, 11
 Avoid using INSERT in SQL SELECT statements, 10
 Avoid using INSERT statements in loops, 10
 Avoid using LIKE in SQL queries, 11
 Avoid using READ statement without AT END clause, 50
 Avoid using SELECT *, 10
 Avoid using SELECT DISTINCT Statement, 10
 Avoid using SQL Aggregate Functions, 11
 Avoid using SQL INTO statements in loops, 10
 Avoid using SUBMIT statements in loops, 11
 Avoid using UPDATE
 MODIFY, 11
 Avoid using inline PERFORM with too many lines of code, 45
 Avoid using the JOIN SQL clause, 11
 Avoid using the SQL BYPASSING BUFFER clause, 10
 Avoid using the WAIT statement, 11
 BLOCK Clause, 43
 Backward Goto shall not be used, 22, 33, 59, 72, 80, 109, 122, 132, 149, 156, 167, 175
 Bad indentation of scope terminator, 44
 Bad paragraph position used in PERFORM, 50
 Bad statement indentation, 44
 COMPUTE instead of ADD, 48
 COMPUTE instead of DIVIDE, 48
 COMPUTE instead of MULTIPLY, 48
 COMPUTE instead of SUBTRACT, 48
 Cloned Algorithmic, 14, 23, 35, 48, 61, 73, 82, 92, 100, 111, 123, 133, 142, 150, 157, 169, 177
 Cloned Classes, 13, 23, 34, 47, 60, 73, 81, 92, 100, 111, 123, 133, 141, 150, 157, 168, 177
 Cloned Files, 13, 23, 35, 47, 60, 73, 82, 92, 100, 111, 123, 133, 141, 150, 157, 169, 177
 Cloned Functions, 14, 23, 35, 48, 60, 73, 82, 92, 100, 111, 123, 133, 141, 150, 157, 169, 177
 Close file once, 44
 Close open file, 44
 Column 7 for * and D Only, 43
 Comment Before Paragraph, 175
 Comment Division, 43
 Comment FD, 43
 Comment First Level, 43
 Comment Variable 01 and 77, 43
 Commented-out Source Code is not allowed, 12, 22, 33, 59, 72, 91, 99, 110, 122, 132, 149, 156, 176
 Commit Used, 150
 Continue shall not be used, 14, 35, 61, 74, 82, 92, 100, 111, 124, 134, 142, 157, 169, 177
 Delay shall not be used, 24
 Do not use Native SQL instructions, 14
 Dynamic Memory Allocation shall not be used, 34, 110
 EXIT PROGRAM shall not be used, 142
 Each loop shall be named, 23
 Empty line after EXIT, 44
 Empty line after SECTION, 44
 Empty lines around DIVISION, 43
 Exec shall not be used., 142
 Exit Label shall be named, 22
 FIXME shall not be committed in sources code, 14, 24, 35, 48, 61, 74, 82, 92, 100, 112, 124, 134, 142, 150, 157, 169, 177
 Factorizable Classes, 13, 23, 34, 47, 60, 73, 81, 91, 99, 111, 123, 133, 141, 150, 156, 168, 176
 Factorizable Files, 13, 23, 34, 47, 60, 73, 81, 91, 99, 111, 123, 133, 141, 150, 156, 168, 176
 Factorizable Functions, 13, 23, 34, 47, 60, 73, 81, 91, 99, 111, 123, 133, 141, 150, 156, 168, 177
 Factorizable Packages, 13, 23, 34, 47, 60, 73, 81, 91, 99, 111, 123, 133, 141, 150, 156, 168, 177
 Fallthrough shall be avoided, 35, 61, 74, 92, 100, 111, 124, 134, 177
 Forbid call to a system function, 12
 Forbid calls to GET RUN TIME., 12
 Forbid calls to dialog transactions, 12
 Forbid use of GENERATE REPORT / SUBROUTINE POOL / DYNPRO, 12
 Forbid use of INSERT/DELETE REPORT/TEXTPOOL, 12
 Forbid use of SYSTEM-CALL, 12

Forbid uses of OFFSET in ASSIGN, 12
Function size, 80
Goto shall not be used, 24, 35, 61, 74, 82, 112, 124, 134, 150, 157, 169, 177
Homonymous variable shall not be used, 50
IDMS FIND CURRENT, 45
IDMS One modify by PERFORM, 45
IDMS One same call, 45
IDMS Ready Protected Update, 45
IDMS Return Code, 45
IO Functions shall not be used, 36, 113
Incorrect Function Name, 81
Incorrect Module Name, 81
Incorrect Program Name, 81
Incorrect Subroutine Name, 81
Label out a switch, 35, 61, 74, 82, 100, 112, 124, 134, 142, 178
Macro longjmp or setjmp shall not be used, 34, 110
Macro offsetof shall not be used, 36, 112
Method should have self as first argument, 141
Method without parameter, 141
Missing Break, 33, 59, 90, 98, 109, 122, 132, 175
Missing Case Else clause, 167
Missing Default, 12, 33, 59, 72, 80, 91, 99, 110, 122, 132, 149, 176
Missing END-ADD, 45
Missing END-CALL, 45
Missing END-COMPUTE, 46
Missing END-DELETE, 46
Missing END-DIVIDE, 46
Missing END-EVALUATE, 44
Missing END-IF, 45
Missing END-MULTIPLY, 46
Missing END-READ, 46
Missing END-RETURN, 46
Missing END-REWRITE, 46
Missing END-SEARCH, 46
Missing END-START, 46
Missing END-STRING, 46
Missing END-SUBTRACT, 46
Missing END-UNSTRING, 46
Missing END-WRITE, 47
Missing FILLER, 47
Missing case in switch, 14, 24, 36, 61, 74, 83, 92, 101, 112, 124, 134, 151, 178
Missing compound if, 33, 59, 72, 91, 99, 110, 122, 132, 140, 176
Missing compound statement, 33, 59, 72, 90, 98, 110, 122, 132, 140, 175
Missing final else, 12, 22, 34, 60, 72, 80, 91, 99, 110, 122, 133, 140, 149, 156, 167, 176
Multiple Exit (Function
 Sub or Property) statement, 170
Multiple Exit Do statement, 170
Multiple Exit For statement, 170
Multiple Exit While statement, 170
Multiple Exit in loop, 24
Multiple break in loop are not allowed, 36, 62, 75, 93, 101, 113, 125, 135, 143, 158, 178
Multiple exit, 83
Multiple exits are not allowed, 15, 24, 36, 62, 74, 83, 93, 101, 112, 124, 134, 143, 151, 157, 169, 178
Nested Program, 47
Nesting Level of Preprocessing directives is too high, 34, 60, 110
No Conditional GOTO, 48
No DEBUG MODE, 48
No INITIALIZE, 48
No MOVE CORRESPONDING, 48
No RENAMES, 49
No Resources, 176
No Variables S9(9), 49
No case in Select, 169

No more than 3 nested IF, 47
No procedural COPY, 49
Number of parameters, 81
Open file once, 44
Paragraphs having exact same name, 44
Parameter name, 81
Parameters shall be ordered: 'IN'
 'OUT', 24
Perform with no THRU, 49
Prevent use of EDITOR-CALLS, 14
Print shall not be used., 142
READ-WRITE Instruction, 50
Recursion are not allowed, 35, 112
Relaxed violation, 15, 24, 36, 50, 62, 74, 83, 93, 101, 112, 124, 134, 143, 151, 157, 169, 178
Resources Filename, 178
Resources Folder, 176
Risky Empty Statement, 36, 62, 74, 93, 101, 112, 124, 135, 143, 178
Rollback Used, 150
Signal or Raise shall not be used, 36, 113
Single GOBACK, 45
Standard Label, 45
Statement shall be in uppercase, 50
TODO shall not be committed in sources code, 14, 24, 36, 49, 61, 74, 82, 92, 100, 112, 124, 134, 142, 151, 157, 169, 178
The class name should conform to the defined standard, 11
The form name should conform to the defined standard, 13
The function name should conform to the defined standard, 13
The macro name should conform to the defined standard, 13
The method name should conform to the defined standard, 13
The program or report name should conform to the defined standard, 14
There shall be a init method in the class., 140
There shall be a no code before first case, 35, 61, 73, 92, 100, 111, 123, 134, 177
There shall be no 'when others' in exception handler, 24
There shall be only one Statement per line, 142
Time Handling Functions shall not be used, 37, 113
Use 'exit when' instead of if... exit syntax, 23
Use COMP for OCCURS, 49
Use FILE STATUS, 44
Use SYNCHRONIZED, 50
Use WHEN OTHER, 50
Use of Exit Do statement, 167
Use of Exit For statement, 168
Use of Exit Function statement, 167
Use of Exit Property statement, 168
Use of Exit Select statement, 168
Use of Exit Sub statement, 168
Use of Exit Try statement, 168
Use of Exit While statement, 168
Use of Fortran 77, 80
Use of SAVE and DATA, 83
Use of allocate/deallocate, 80
Use of contains, 80
Use of continue is deprecated (Fortran), 80
Use of module, 81
Variable declaration format, 44

Run, 406

S

SIGIST, 481
SQL, 143
Safety, 407
Satisfaction, 407
Scale, 407

Security, 408
Service, 409
Service Level Agreement, 409
Simplicity, 410
Software, 410
Software Asset Management, 411
Software Development Process, 411
Software Engineering, 411
Software Item, 412
Software Licence Agreement, 518
Software Life Cycle, 412
Software Product Evaluation, 413
Software Quality, 413
Software Quality Characteristic, 413
Software Quality Evaluation, 414
Software Quality Measure, 414
Software Repository, 414
Software Unit, 415
Source Code, 415
Specification, 415
Stability, 416
Stage, 416
Stakeholder, 416
Standard, 417
Standard Process, 417
Statement, 418
Statement Testing, 418
Statement of Work, 418
Static Analysis, 419
Statistical Process Control, 419
Step, 420
Stress Testing, 420
Structural Testing, 421
Stub, 421
Suitability, 422
Supplier, 422
Support, 423
Support Manual, 423
System, 424
System Testing, 424

T

TSQL, 151
Task, 424
Team Software Process, 482
Technical Requirement, 425
Technique, 425
Test, 426
Test Case, 426
Test Case Suite, 427
Test Coverage, 427
Test Documentation, 428
Test Environment, 428
Test Objective, 428
Test Plan, 429
Test Procedure, 429
Testability, 430
Testing, 430
Testing Description, 431
Time Behaviour, 431
Tool, 432
Total Quality Management, 432
Traceability, 432

Traceable, [433](#)
Trunk, [433](#)

U

Understandability, [433](#)
Unit Test, [434](#)
Unit of Measurement, [434](#)
Usability, [435](#)
Usability Compliance, [435](#)
User, [436](#)
User Documentation, [437](#)
User Manual, [437](#)

V

VBNET, [158](#)
Validation, [438](#)
Value, [439](#)
Verification, [439](#)
Version, [440](#)

W

Work Breakdown Structure, [441](#)
Work Product, [441](#)

X

XAML, [170](#)
XML Catalog, [254](#)
XML Format Reference, [261](#)
XML Schema
 analysis.xsd, [517](#)
 config-1.3.xsd, [517](#)
 decision.xsd, [517](#)
 description.xsd, [517](#)
 exports.xsd, [517](#)
 form.xsd, [517](#)
 highlights.xsd, [517](#)
 input-data-2.xsd, [517](#)
 properties-1.2.xsd, [517](#)
 properties.xsd, [517](#)
 tutorials.xsd, [517](#)
 wizards.xsd, [517](#)